



# 2018 CATALOG



## Energy Power Save CO.,LTD.

10+ YEARS PROFESSIONAL LED UNDERWATER LIGHT MANUFACTURER

Mian Products: Led Underwater Light  
Led Fountain Light Led  
Underground Light

[www.futureled.co.th](http://www.futureled.co.th) Email: [sale@futureled.co.th](mailto:sale@futureled.co.th) Contact person: Puvanat Saikaew Tel: +66 - 089-006-0906



## **SS LED UNDERWATER LIGHT**

**Application:**

**Fountain**

**Pond**

**Hotel water decoration**

**Garden park water decoration**


**Any underwater place**

**IP68 2 YEARS WARRANTY**

**SS LED UNDERWATER LIGHT**

Model: 120G

IP68

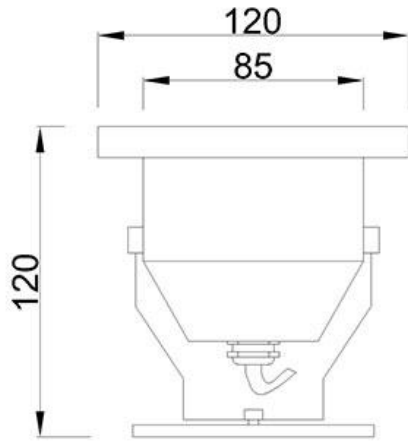

Housing: SUS 304#SS

Glass: Tempered glass T=8mm

Waterproof rubber cable with 1 meter

Light color choose:



**Color temperature:**

3000K-3500 WW

4000K-5000K PW

6000-6500K CW

Life-span: 50000hrs

Led chip: Epistar/Cree


Waterproof constant driver

Non-dimmable

Power	Voltage
3*1w	24V/12V
5*1w	24V/12V
6*1w	24V/12V
3*3w	24V DC/AC

Model: 145G

IP68

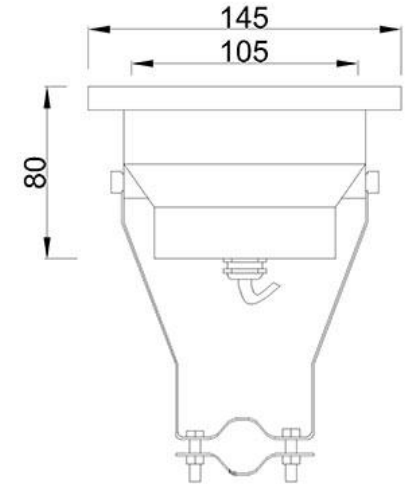

Housing: SUS 304#SS

Glass: Tempered glass T=8mm

Waterproof rubber cable with 1 meter

Light color choose:



**Color temperature:**

3000K-3500 WW

4000K-5000K PW

6000-6500K CW

Life-span: 50000hrs

Led chip: Epistar/Cree

Waterproof constant driver


Non-dimmable

Power	Voltage
6*1w	24V/12V
9*1w	24V/12V
12*1w	24V/12V
6*3w	24V DC/AC



Model: 170G

IP68

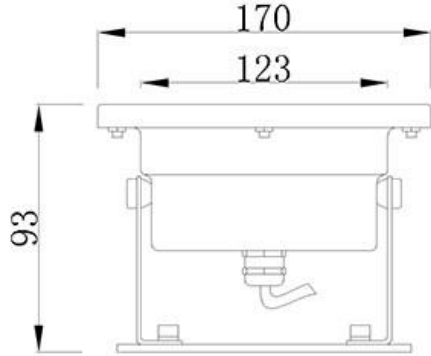

Housing: SUS 304#SS  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter

Light color choose:



**Color temperature:**


3000K-3500 WW  
4000K-5000K PW  
6000-6500K CW

Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
12*1w	24V/12V
15*1w	24V/12V
18*1w	24V/12V
9*3w	24V DC/AC

Model: 190G

IP68

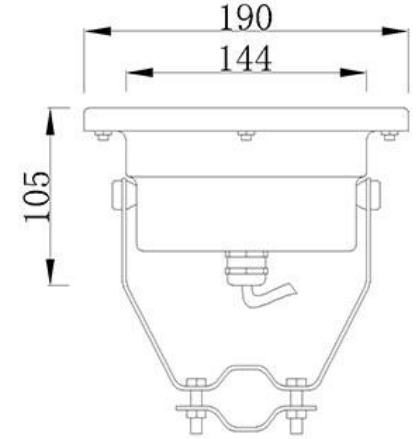

Housing: SUS 304#SS  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter

Light color choose:



**Color temperature:**


3000K-3500 WW  
4000K-5000K PW  
6000-6500K CW

Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
12*1w	24V/12V
18*1w	24V/12V
24*1w	24V/12V
12*3w	24V DC/AC

Model: 215G

IP68

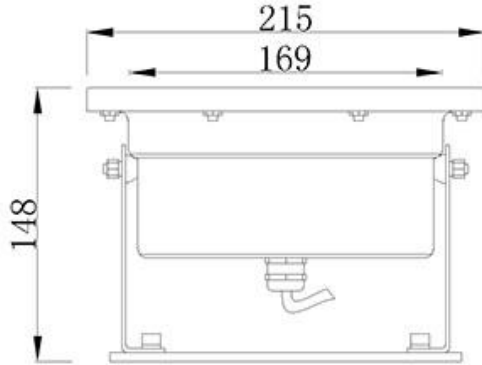

Housing: SUS 304#SS  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter

Light color choose:



**Color temperature:**


3000K-3500 WW  
4000K-5000K PW  
6000-6500K CW

Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
12*1w	24V/12V
18*1w	24V/12V
24*1w	24V/12V
30*1w	24V DC/AC

Model: 250G

IP68

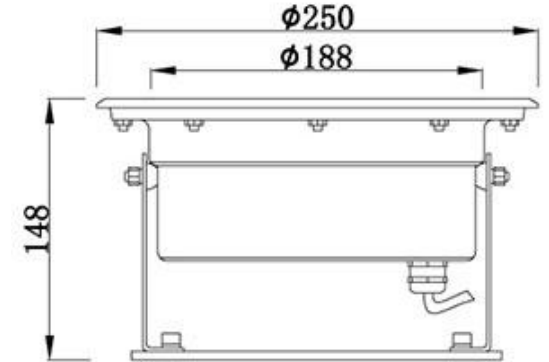

Housing: SUS 304#SS  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter

Light color choose:



**Color temperature:**


3000K-3500 WW  
4000K-5000K PW  
6000-6500K CW

Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
36*1w	24V/12V
45*1w	24V/12V
12*3w	24V/12V
18*3w	24V DC/AC

Model: 300G

IP68

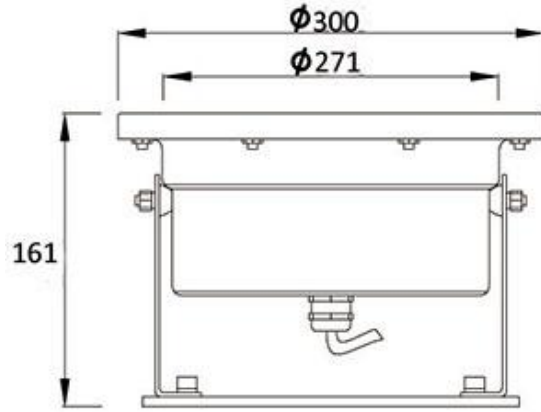

Housing: SUS 304#SS  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter

Light color choose:



**Color temperature:**


3000K-3500 WW  
4000K-5000K PW  
6000-6500K CW

Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
54*1w	24V/12V
72*1w	24V/12V
48*3w	24V/12V
54*3w	24V DC/AC

Model: 390G

IP68

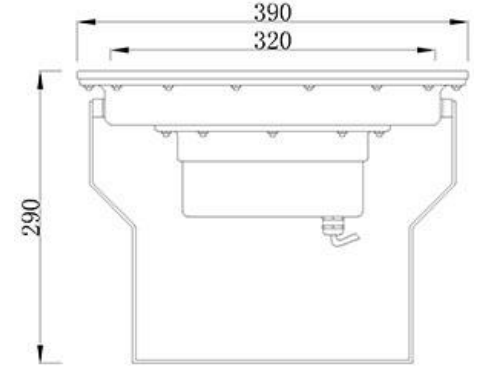

Housing: SUS 304#SS  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter

Light color choose:



**Color temperature:**


3000K-3500 WW  
4000K-5000K PW  
6000-6500K CW

Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
72*1w	24V/12V
108*1w	24V/12V
72*3w	24V/12V

Model: 215GS

IP68

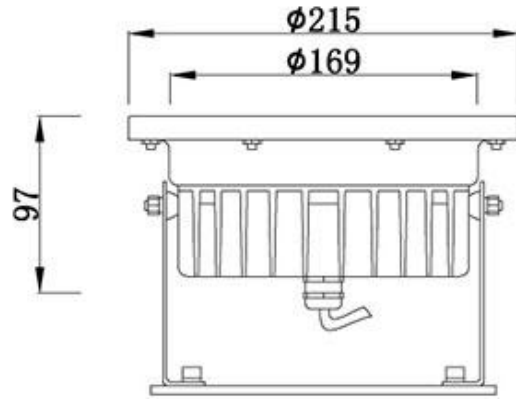

Housing: SUS 304#SS, Aluminum heat sink Light color choose:  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter



**Color temperature:**


3000K-3500 WW  
4000K-5000K PW  
6000-6500K CW

Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
24*1w	24V/12V
30*1w	24V/12V
18*3w	24V/12V

Model: 250GS

IP68

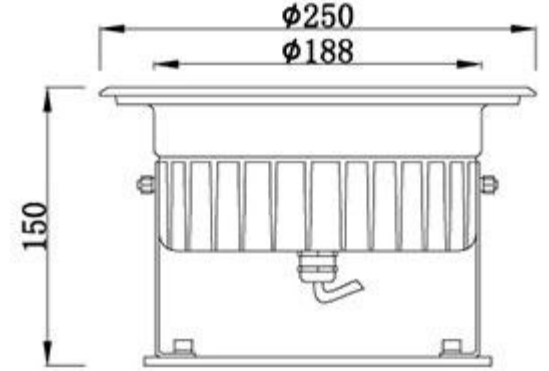

Housing: SUS 304#SS, Aluminum heat sink Light color choose:  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter



**Color temperature:**

3000K-3500 WW  
4000K-5000K PW  
6000-6500K CW


Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
36*1w	24V/12V
45*1w	24V/12V
24*3w	24V/12V



Model: 300GS

IP68

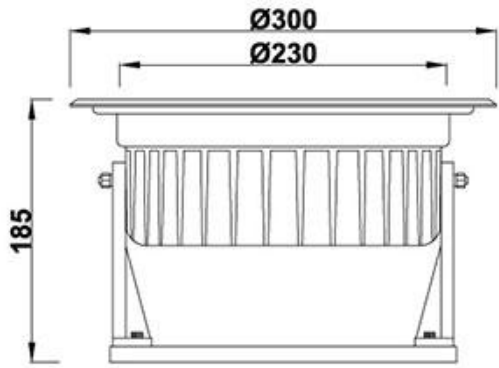

Housing: SUS 304#SS, Aluminum heat sink Light color choose:  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter



**Color temperature:**

3000K-3500 WW  
4000K-5000K PW  
6000-6500K CW

Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
36*1w	24V/12V
45*1w	24V/12V
24*3w	24V/12V

Model: 125G

IP68



Housing: SUS 304# Cast SS  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter

Light color choose:



**Color temperature:**

3000K-3500 WW  
4000K-5000K PW  
6000-6500K CW


Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
3*1w	24V/12V
6*1w	24V/12V
3*3w	24V/12V



Model: 192G

IP68

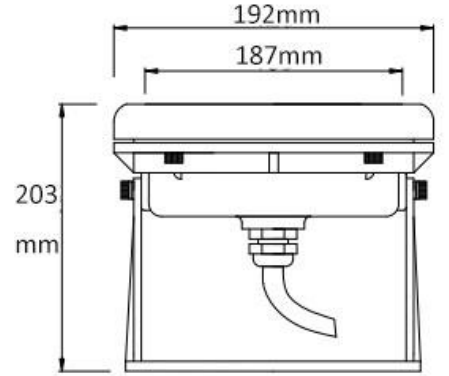

Housing: SUS 304# Cast SS  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter

Light color choose:



Color temperature:

- 3000K-3500 WW
- 4000K-5000K PW
- 6000-6500K CW

Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
12*1w	24V/12V
18*1w	24V/12V
24*1w	24V/12V

### RGB Lighting Control Way

① Color Auto-change: No need any controller, the light color will be auto change per 3-5 seconds.

② Remote/Wifi external control



Can be control all external ( 4wires) RGB lights.  
Input Voltage: DC12-24V  
Output current: 30A

Suit Input AC220V  
RGB External Lights




③ DMX512 Control



We have USB & SD Card  
dmx512 controller.  
1 port & 8 ports optional.

Model: 230G

IP68

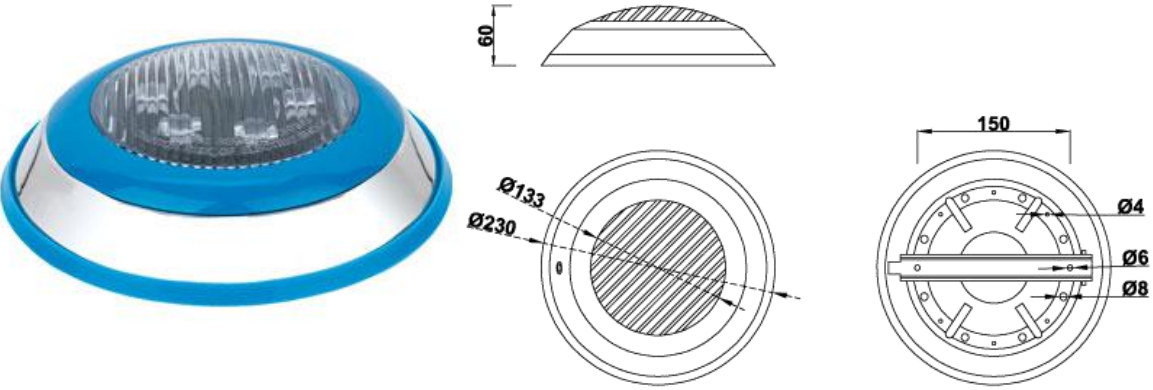

Housing: SUS 304#SS body  
 Glass: Safe mask glass  
 Waterproof rubber cable with 1 meter

Light color choose:



Color temperature:


3000K-3500 WW  
 4000K-5000K PW  
 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
6*1w	24V/12V
9*1w	24V/12V

Model: 300

IP68

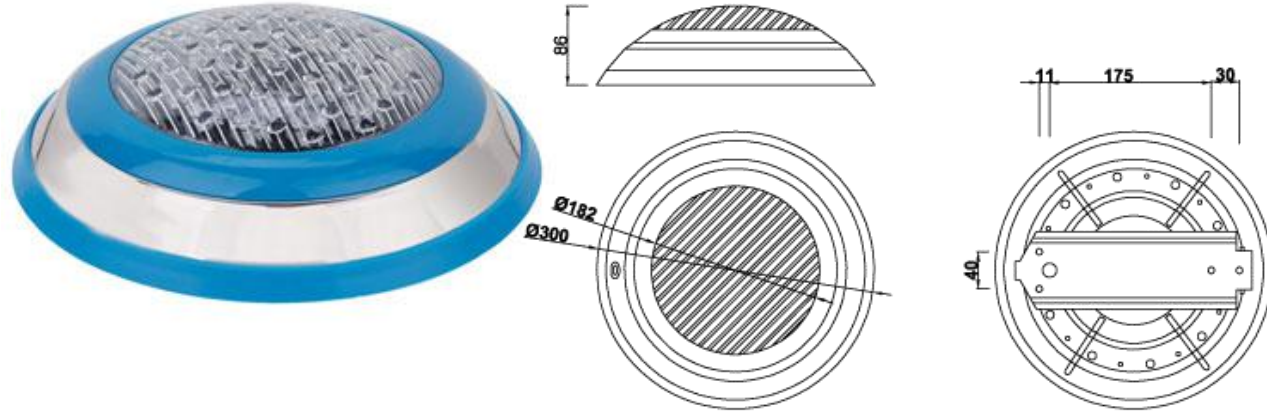

Housing: SUS 304#SS body  
 Glass: Safe mask glass  
 Waterproof rubber cable with 1 meter

Light color choose:



Color temperature:

3000K-3500 WW  
 4000K-5000K PW  
 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
9*1w	24V/12V
12*1w	24V/12V
18*1w	24V/12V





**SS LED FOUNTAIN LIGHT**



# Model: 300GMKH



**IP68**

Housing: SUS 304#SS  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter  
 Middle hole: 42mm/65mm/80mm  
 optional

Power	Voltage
9*1w	24V/12V
12*1w	24V/12V
15*1w	24V/12V
9*3W	24V/12V

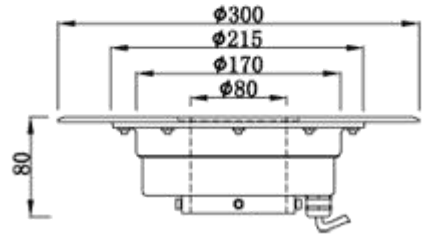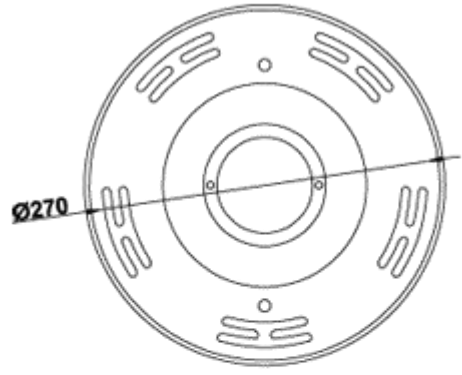

Light color choose:



**Color temperature:**

3000K-3500 WW  
 4000K-5000K PW  
 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable



# Model: 270GMKH



**IP68**

Housing: SUS 304#SS  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter  
 Middle hole: 42mm/50mm/65mm  
 optional

Power	Voltage
6*1w	24V/12V
9*1w	24V/12V
12*1w	24V/12V
6*3W	24V/12V

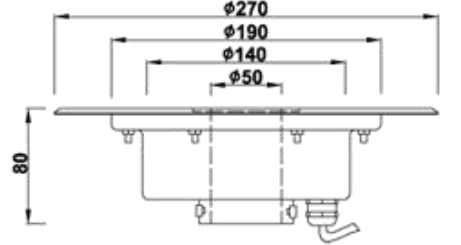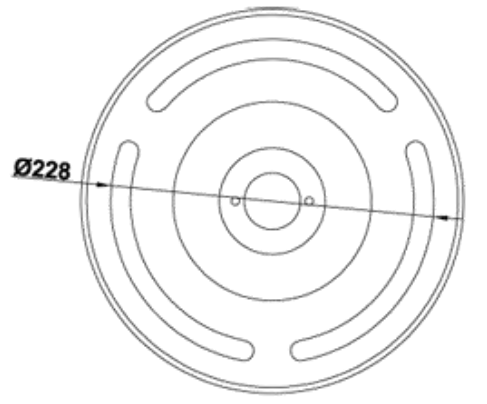

Light color choose:



**Color temperature:**

3000K-3500 WW  
 4000K-5000K PW  
 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable




# Model: 230GMKH



**IP68**

Housing: SUS 304#SS  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter  
 Middle hole: 42mm/50mm optional

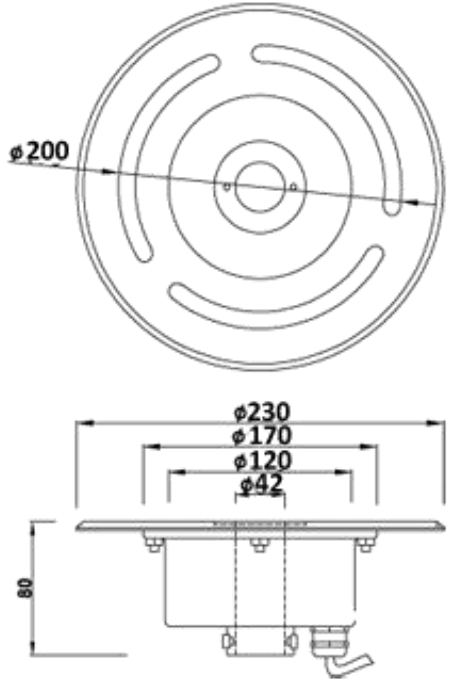

Light color choose:



**Color temperature:**

3000K-3500 WW  
 4000K-5000K PW  
 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable


Power	Voltage
9*1w	24V/12V
12*1w	24V/12V
9*3W	24V/12V

# Model: 220GMKH



**IP68**

Housing: SUS 304#SS  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter  
 Middle hole: 42mm/50mm/65mm optional

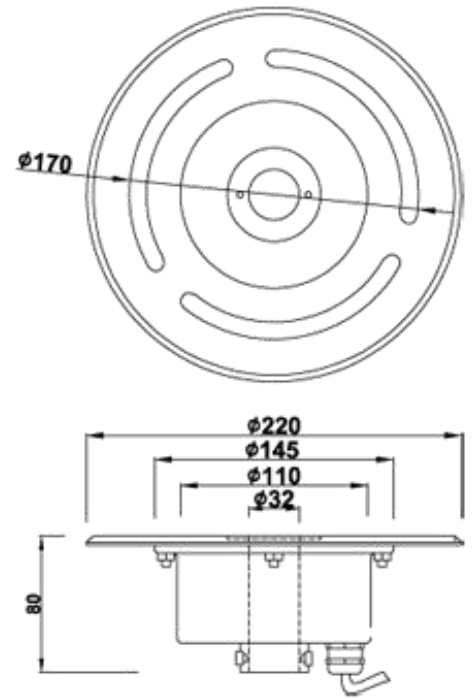

Light color choose:




**Color temperature:**

3000K-3500 WW  
 4000K-5000K PW  
 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
6*1w	24V/12V
9*1w	24V/12V
6*3W	24V/12V

# Model: 150GMK

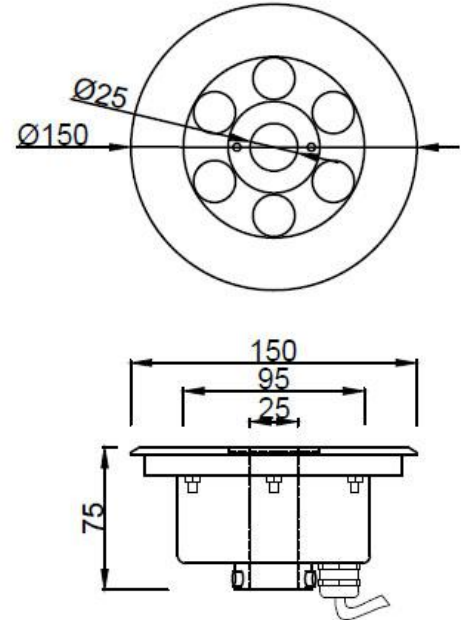

**IP68**

Housing: SUS 304#SS  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter  
 Middle hole: 25mm

Light color choose:




**Color temperature:**

3000K-3500 WW  
 4000K-5000K PW  
 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
3*1w	24V/12V
6*1w	24V/12V

# Model: 170GMK

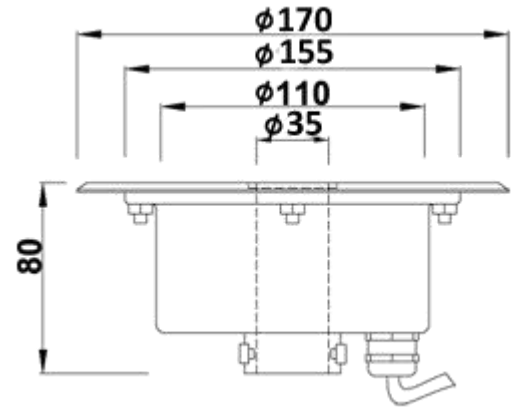

**IP68**

Housing: SUS 304#SS  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter  
 Middle hole: 35mm

Light color choose:




**Color temperature:**

3000K-3500 WW  
 4000K-5000K PW  
 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
6*1w	24V/12V
9*1w	24V/12V
6*3W	24V/12V

# Model: 190GMK

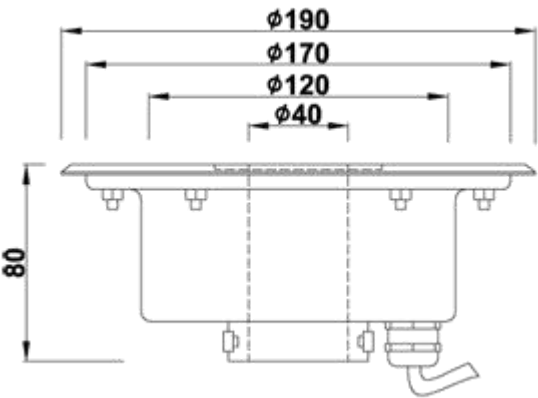

**IP68**

Housing: SUS 304#SS  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter  
 Middle hole: 42mm/50mm optional

Light color choose:




**Color temperature:**

3000K-3500 WW  
 4000K-5000K PW  
 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
6*1w	24V/12V
9*1w	24V/12V
12*1W	24V/12V

# Model: 210GMK

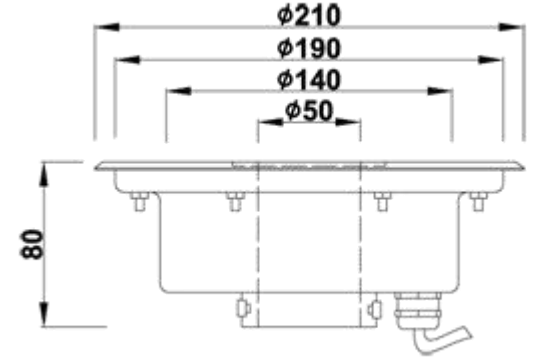

**IP68**

Housing: SUS 304#SS  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter  
 Middle hole: 42mm/50mm/65mm optional

Light color choose:




**Color temperature:**

3000K-3500 WW  
 4000K-5000K PW  
 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
9*1w	24V/12V
12*1w	24V/12V
9*3W	24V/12V

# Model: 230GMK

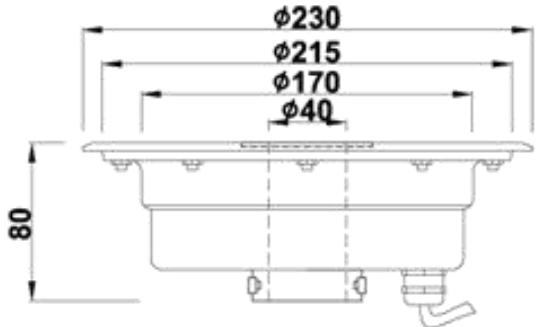

**IP68**

Housing: SUS 304#SS  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter  
 Middle hole: 42mm/50mm/65mm  
 80mm optional

Light color choose:




**Color temperature:**

3000K-3500 WW  
 4000K-5000K PW  
 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
12*1w	24V/12V
15*1w	24V/12V
12*3W	24V/12V

# Model: 260GMK

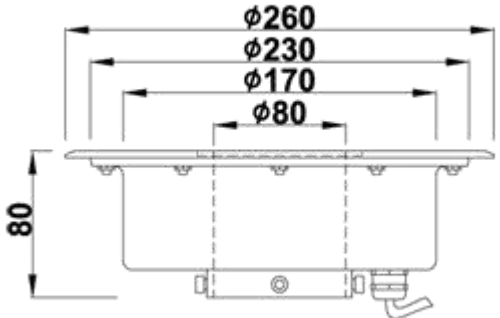

**IP68**

Housing: SUS 304#SS  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter  
 Middle hole: 65mm/80mm optional

Light color choose:



**Color temperature:**


3000K-3500 WW  
 4000K-5000K PW  
 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
24*1w	24V/12V
18*3w	24V/12V



# Model: 135GK

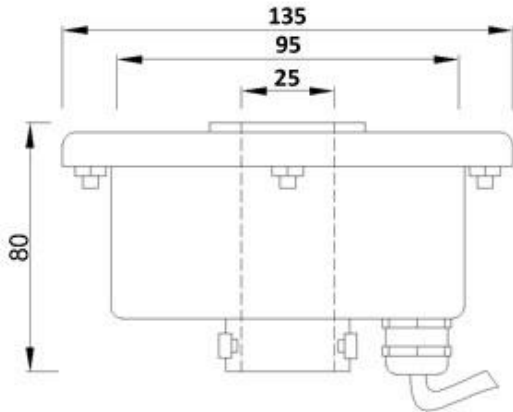

**IP68**

Housing: SUS 304#SS  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter  
 Middle hole: 25mm

Light color choose:




**Color temperature:**

- 3000K-3500 WW
- 4000K-5000K PW
- 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
3*1w	24V/12V
6*1w	24V/12V

# Model: 145GK

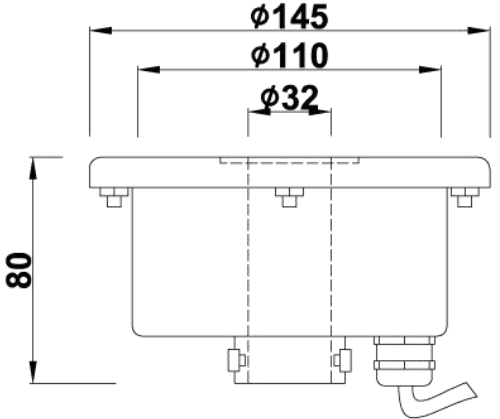

**IP68**

Housing: SUS 304#SS  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter  
 Middle hole: 25mm/32mm optional

Light color choose:




**Color temperature:**

- 3000K-3500 WW
- 4000K-5000K PW
- 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
6*1w	24V/12V
9*1w	24V/12V

# Model: 170GK

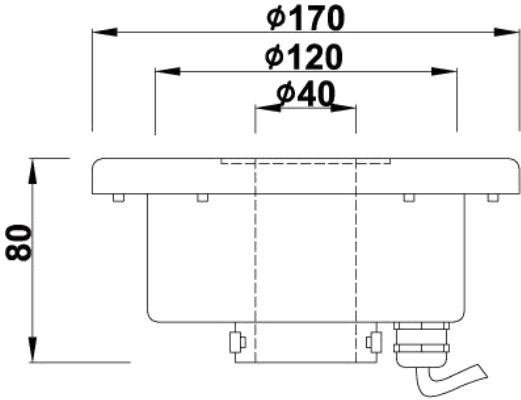

**IP68**


Housing: SUS 304#SS  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter  
 Middle hole: 42mm/50mm optional

Light color choose:

**Color temperature:**  
 3000K-3500 WW  
 4000K-5000K PW  
 6000-6500K CW  
  
 Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
6*1w	24V/12V
9*1w	24V/12V
12*1W	24V/12V

# Model: 190GK

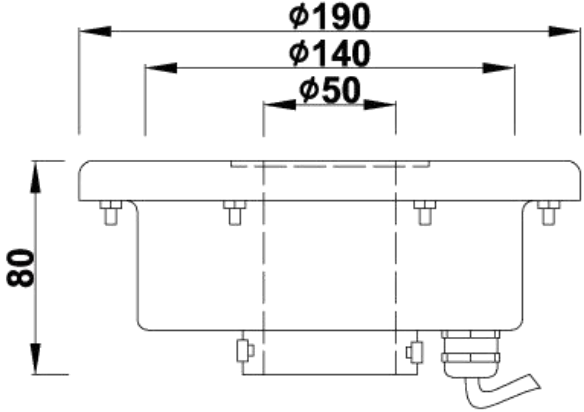

**IP68**



Housing: SUS 304#SS  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter  
 Middle hole: 42mm/50mm/65mm optional

Light color choose:

**Color temperature:**  
 3000K-3500 WW  
 4000K-5000K PW  
 6000-6500K CW  
  
 Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
9*1w	24V/12V
12*1w	24V/12V
6*3w	24V/12V

# Model: 215GK

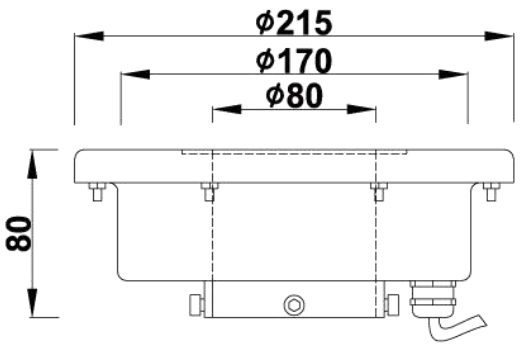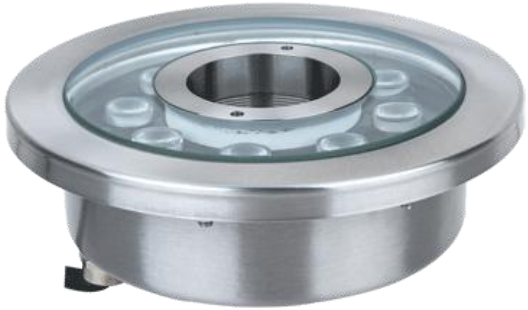

Housing: SUS 304#SS **IP68**

Glass: Tempered glass T=8mm

Waterproof rubber cable with 1 meter

Middle hole: 42mm/50mm/65mm/80 optional

Light color choose:




**Color temperature:**

- 3000K-3500 WW
- 4000K-5000K PW
- 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
12*1w	24V/12V
15*1w	24V/12V
24*1W	24V/12V
30*1W	24V/12V

# Model: 390GK

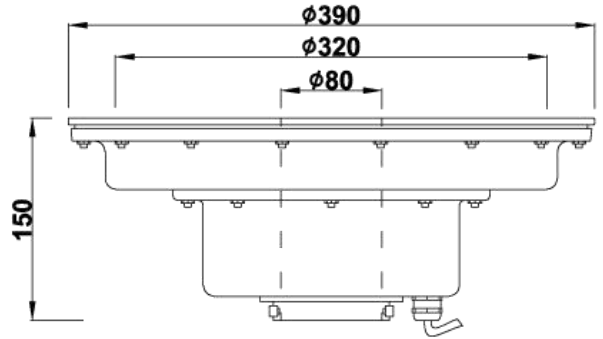

Housing: SUS 304#SS **IP68**

Glass: Tempered glass T=8mm

Waterproof rubber cable with 1 meter

Middle hole: 80mm optional

Light color choose:



**Color temperature:**


- 3000K-3500 WW
- 4000K-5000K PW
- 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
84*1w	24V/12V
60*3w	24V/12V

Model: 145GK-2

IP68

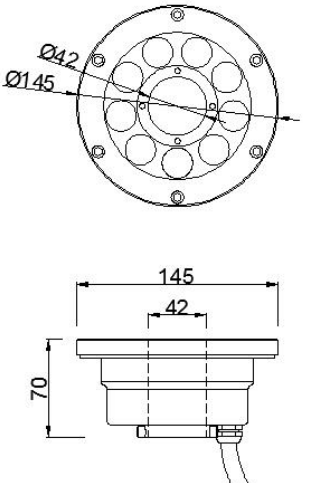

Housing: SUS 304# Cast SS  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter  
Middle hole: 42mm



Light color choose:

**Color temperature:**  
3000K-3500 WW  
4000K-5000K PW  
6000-6500K CW  
  
Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
6*1w	24V/12V
9*1w	24V/12V
6*3w	24V/12V

Model: 240GMKH

IP68

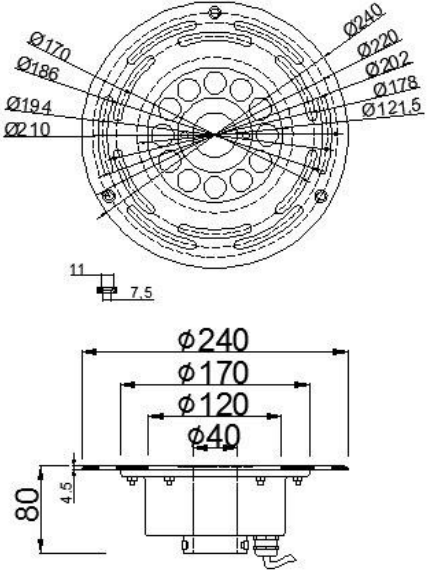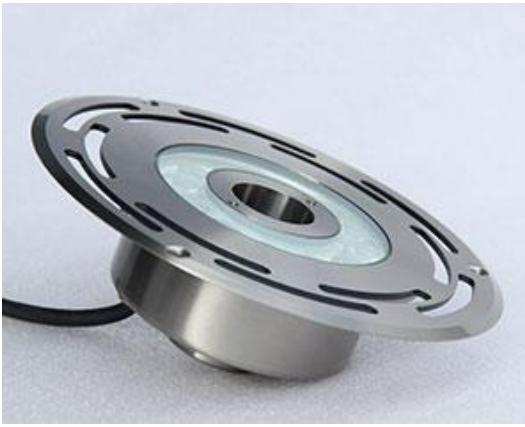

Housing: SUS 304# Cast SS  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter  
Middle: 40mm

Light color choose:

**Color temperature:**  
3000K-3500 WW  
4000K-5000K PW  
6000-6500K CW  
  
Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
6*1w	24V/12V
9*1w	24V/12V
12*1w	24V/12V



Model: 160TGMK

IP68



Housing: SUS 304#SS  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter

Light color choose:



Color temperture:


3000K-3500 WW  
4000K-5000K PW  
6000-6500K CW

Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
6*1w	24V/12V
9*1w	24V/12V
12*1w	24V/12V

Model: 170SGMK

IP68

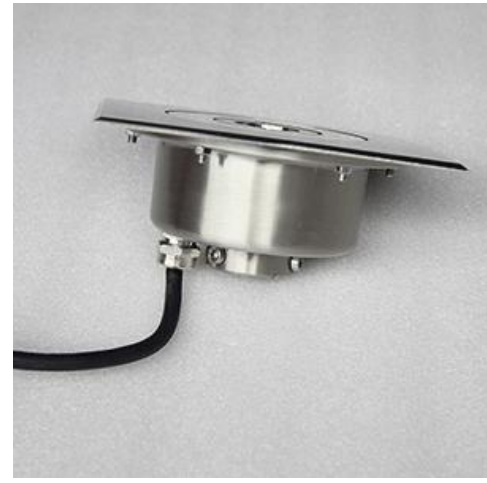

Housing: SUS 304# SS  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter

Light color choose:



Color temperture:

3000K-3500 WW  
4000K-5000K PW  
6000-6500K CW


Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
6*1w	24V/12V
9*1w	24V/12V
6*3w	24V/12V

Model: 600GMKH



IP68

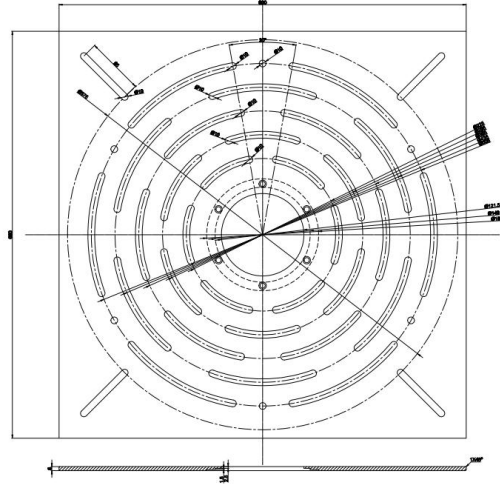

Housing: SUS 304#SS, Aluminum heat sink Light color choose:  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter  
Size: Dia: 600\*600mm




**Color temperture:**

3000K-3500 WW  
4000K-5000K PW  
6000-6500K CW


Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
9*1w	24V/12V
12*1w	24V/12V
9*3w	24V/12V

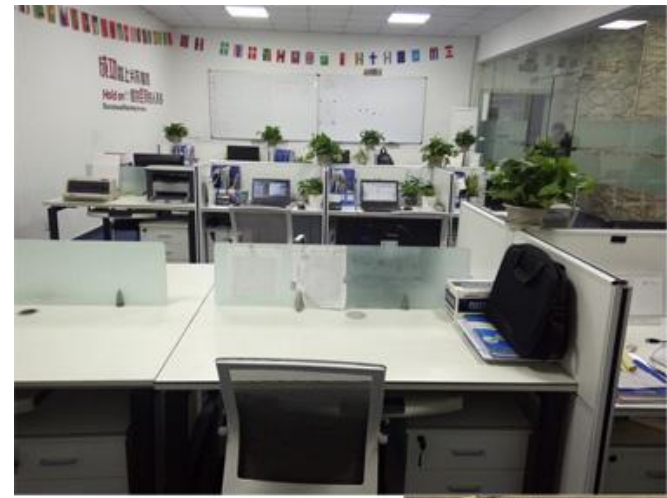




# ALUMINUM LED FOUNTAIN LIGHT

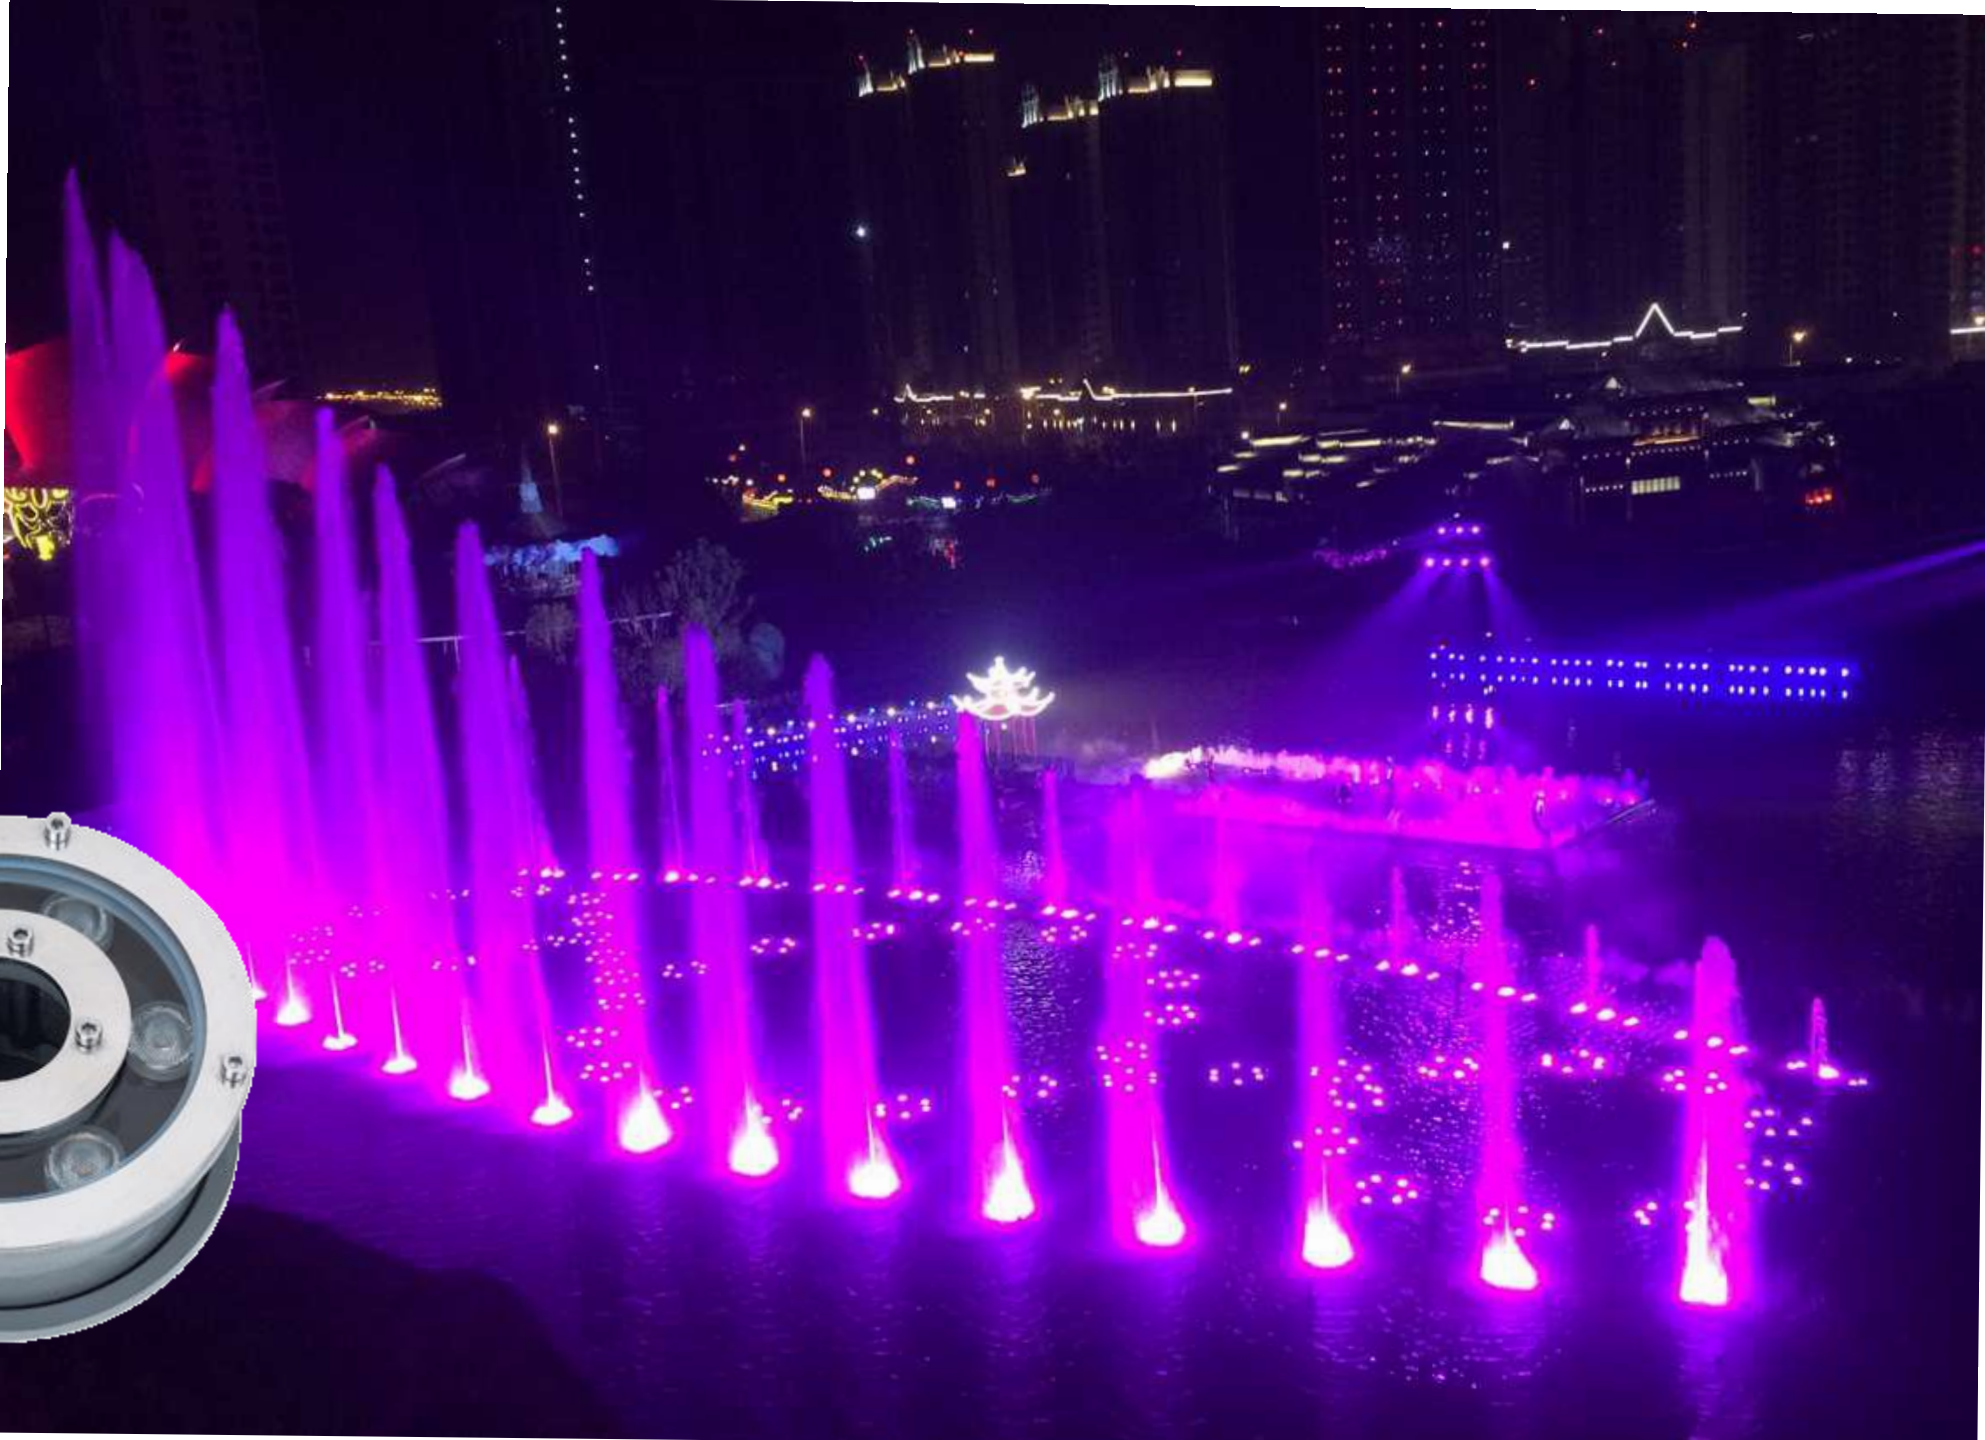

Model: 130ZK

IP68

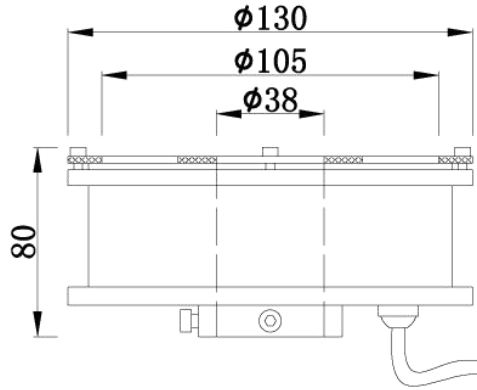

Housing: Aluminum body, SS panel.  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter  
Middle hole: 38mm

Light color choose:



Color temperature:


3000K-3500 WW  
4000K-5000K PW  
6000-6500K CW

Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
3*1w	24V/12V
6*1w	24V/12V
9*1W	24V/12V

Model: 160ZK

IP68

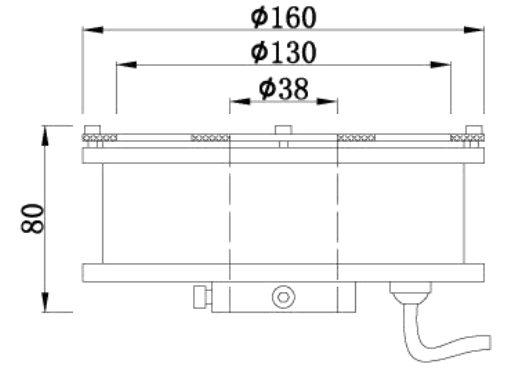

Housing: Aluminum body, SS panel.  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter  
Middle hole: 80mm optional

Light color choose:



Color temperature:

3000K-3500 WW  
4000K-5000K PW  
6000-6500K CW


Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
6*1w	24V/12V
9*1w	24V/12V
12*1w	24V/12V



Model: 180ZK

IP68

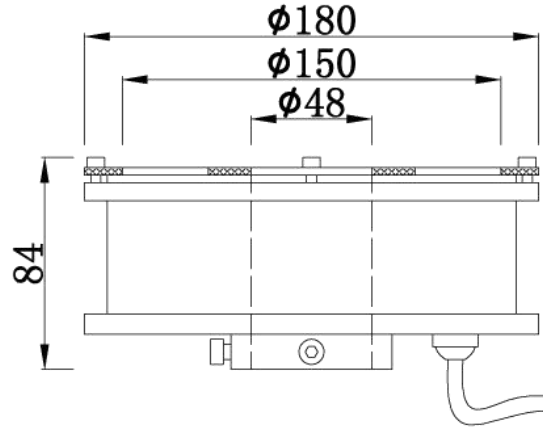

Housing: Aluminum body, SS panel.  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter  
Middle hole: 48mm

Light color choose:



Color temperature:


3000K-3500 WW  
4000K-5000K PW  
6000-6500K CW

Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
9*1w	24V/12V
12*1w	24V/12V
15*1W	24V/12V

Model: 200ZK

IP68

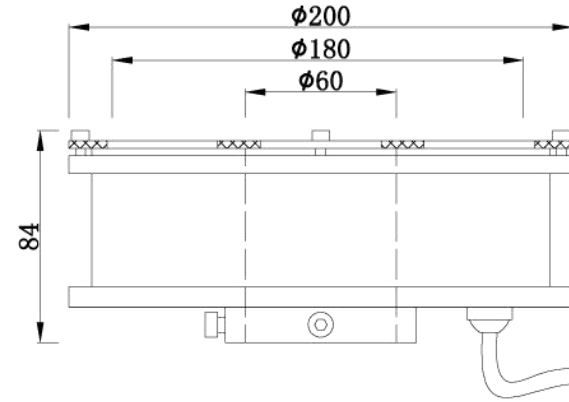

Housing: Aluminum body, SS panel.  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter  
Middle hole: 60mm optional

Light color choose:



Color temperature:


3000K-3500 WW  
4000K-5000K PW  
6000-6500K CW

Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
15*1w	24V/12V
18*1w	24V/12V

# Model: 160ZMK

**IP68**

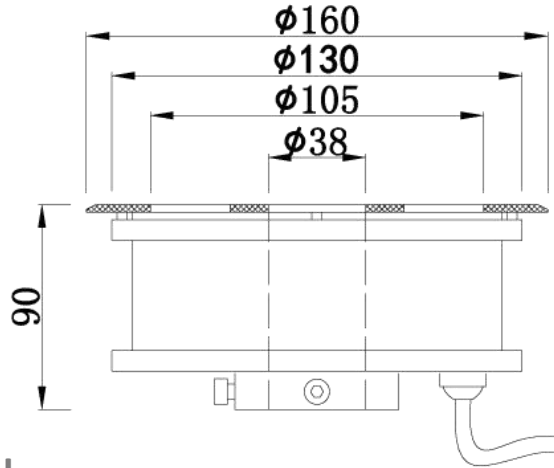

Housing: Aluminum body, SS panel.  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter  
 Middle hole: 38mm

Light color choose:



**Color temperature:**


- 3000K-3500 WW
- 4000K-5000K PW
- 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
6*1w	24V/12V
9*1w	24V/12V

# Model: 180ZMK

**IP68**

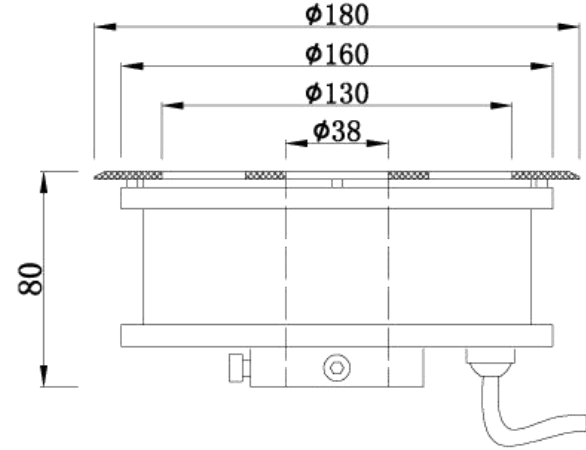

Housing: Aluminum body, SS panel.  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter  
 Middle hole: 38mm optional

Light color choose:



**Color temperature:**


- 3000K-3500 WW
- 4000K-5000K PW
- 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
15*1w	24V/12V
18*1w	24V/12V

Model: 200ZMK

IP68

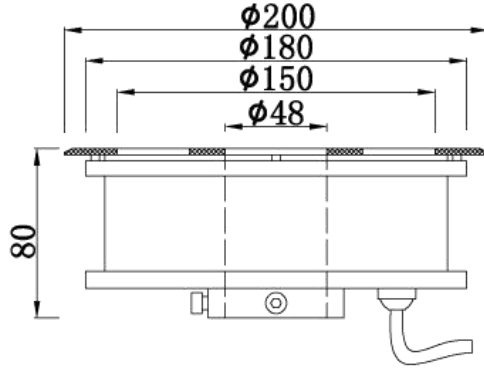

Housing: Aluminum body, SS panel.  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter  
Middle hole: 48mm

Light color choose:



Color temperature:


3000K-3500 WW  
4000K-5000K PW  
6000-6500K CW

Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
6*1w	24V/12V
9*1w	24V/12V
12*1W	24V/12V
15*1W	24V/12V

Model: 220ZMK

IP68

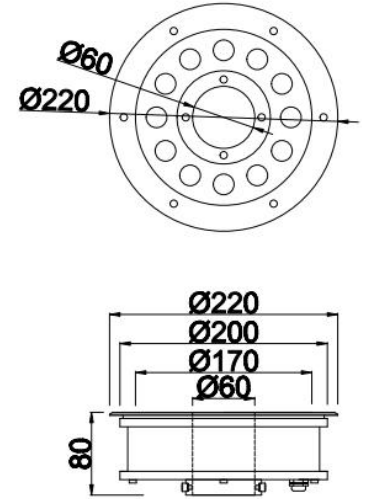

Housing: Aluminum body, SS panel.  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter  
Middle hole: 60mm optional

Light color choose:



Color temperature:


3000K-3500 WW  
4000K-5000K PW  
6000-6500K CW

Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
12*1w	24V/12V
15*1w	24V/12V
18*1W	24V/12V

# Model: 180ZMKH

**IP68**

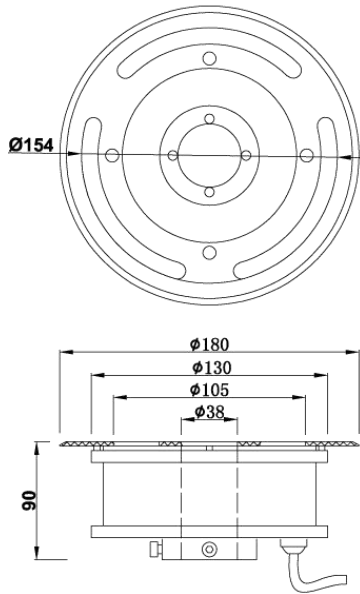

Light color choose:



**Color temperature:**

- 3000K-3500 WW
- 4000K-5000K PW
- 6000-6500K CW


Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Housing: Aluminum body, SS panel.  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter  
 Middle hole: 38mm

Power	Voltage
6*1w	24V/12V
9*1w	24V/12V

# Model: 210ZMKH

**IP68**

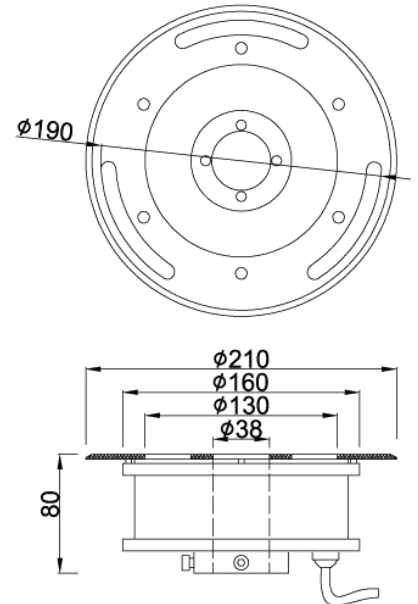

Light color choose:



**Color temperature:**

- 3000K-3500 WW
- 4000K-5000K PW
- 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable


Housing: Aluminum body, SS panel.  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter  
 Middle hole: 38mm optional

Power	Voltage
9*1w	24V/12V
12*1w	24V/12V
9*3W	24V/12V



Model: 240ZMKH

IP68

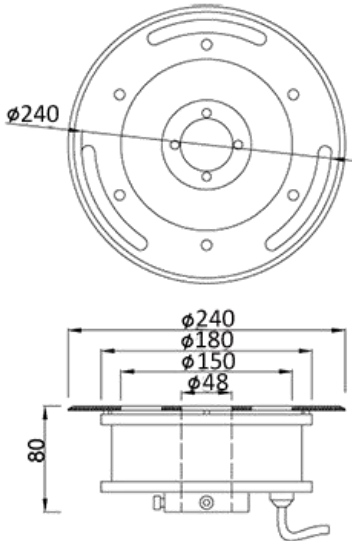

Housing: Aluminum body, SS panel.  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter  
 Middle hole: 38mm

Light color choose:  


Power	Voltage
6*1w	24V/12V
9*1w	24V/12V

**Color temperature:**  
 3000K-3500 WW  
 4000K-5000K PW  
 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

We also provide other fountain equipment, such as fountain nozzle, water jet fountain, fountain pipe, pump etc. Please inquiry us for any about fountain equipment problem.




# LED UNDERGROUND LIGHT



Model: 42GM



IP68

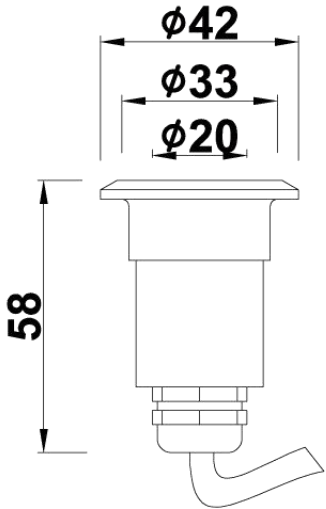

Housing: SUS 304# SS  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter

Light color choose:



Color temperature:

- 3000K-3500 WW
- 4000K-5000K PW
- 6000-6500K CW


Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
1*1w	24V/12V
1*3w	24V/12V

Model: 52GM



IP68

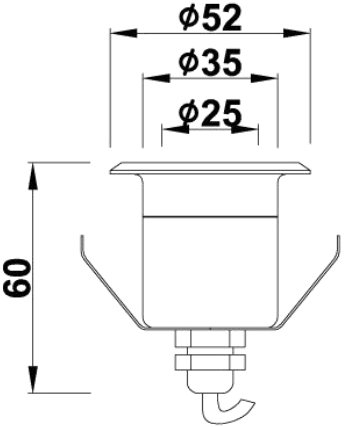

Housing: SUS 304# SS  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter

Light color choose:



Color temperature:


- 3000K-3500 WW
- 4000K-5000K PW
- 6000-6500K CW

Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
1*1w	24V/12V
1*3w	24V/12V

Model: 75GM

IP68

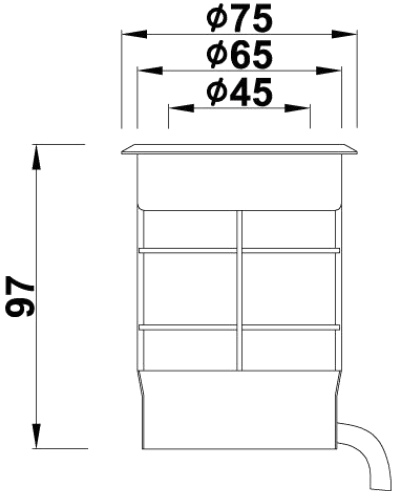

Housing: SUS 304# SS  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter

Light color choose:



Color temperature:


- 3000K-3500 WW
- 4000K-5000K PW
- 6000-6500K CW

Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
3*1w	24V/12V

Model: 100GM

IP68

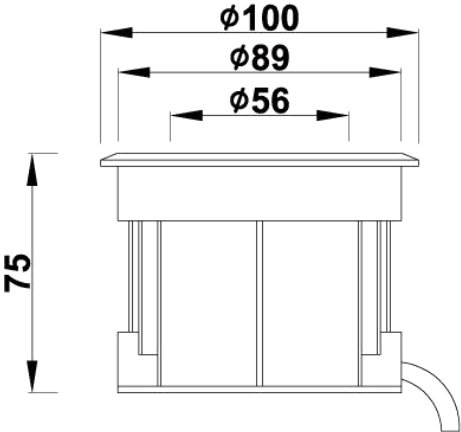

Housing: SUS 304# SS  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter

Light color choose:



Color temperature:

- 3000K-3500 WW
- 4000K-5000K PW
- 6000-6500K CW


Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable

Power	Voltage
1*1w	24V/12V
1*3w	24V/12V



Model: 130GM

IP68

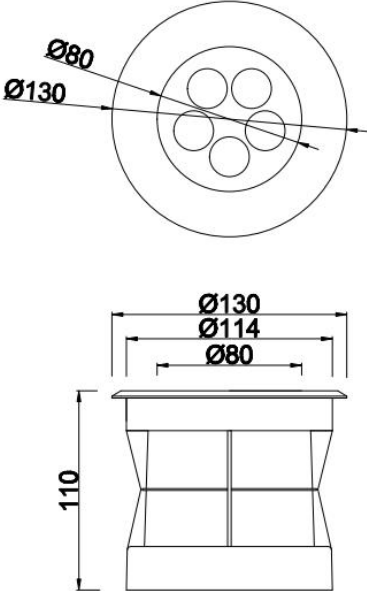

Housing: SUS 304# SS  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter

Light color choose:


**Color temperature:**  
 3000K-3500 WW  
 4000K-5000K PW  
 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
3*1w	24V/12V

Model: 150GM

IP68

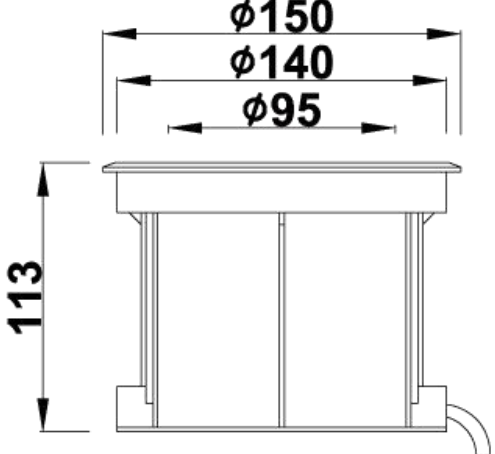

Housing: SUS 304# SS  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter


Light color choose:

**Color temperature:**  
 3000K-3500 WW  
 4000K-5000K PW  
 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
5*1w	24V/12V
6*1w	24V/12V

Model: 180GM

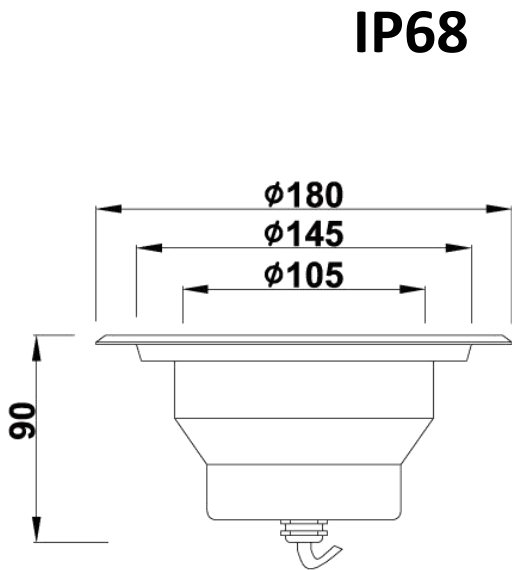

Housing: SUS 304# SS  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter


Light color choose:

Power	Voltage
6*1w	24V/12V
9*1w	24V/12V
12*1w	24V/12V

**Color temperature:**  
 3000K-3500 WW  
 4000K-5000K PW  
 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Model: 165GM

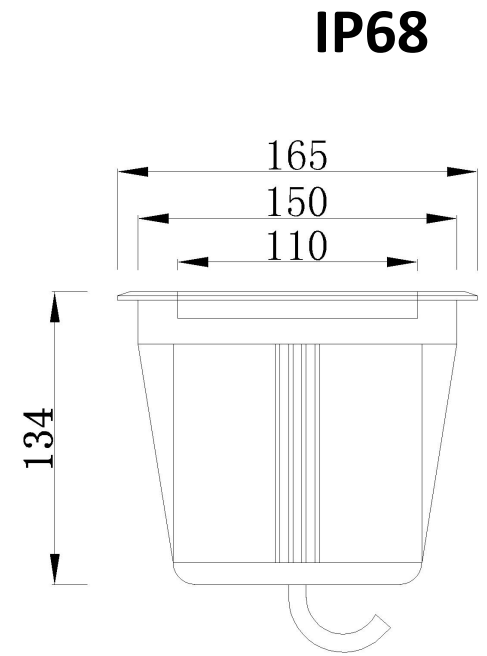

Housing: SUS 304# SS  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter

Light color choose:


Power	Voltage
6*1w	24V/12V
9*1w	24V/12V
12*1w	24V/12V

**Color temperature:**  
 3000K-3500 WW  
 4000K-5000K PW  
 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Model: 200GM

IP68

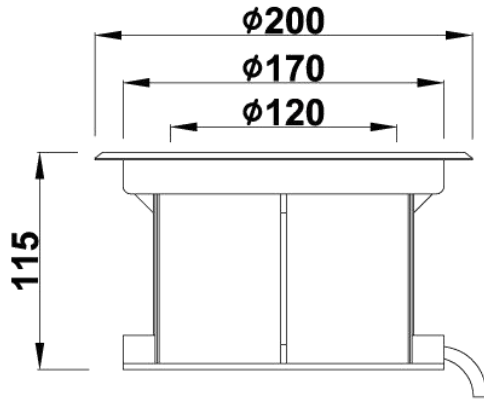

Housing: SUS 304# SS

Glass: Tempered glass T=8mm

Waterproof rubber cable with 1 meter

Light color choose:



Color temperature:

3000K-3500 WW

4000K-5000K PW

6000-6500K CW

Life-span: 50000hrs

Led chip: Epistar/Cree


Waterproof constant driver

Non-dimmable

Power	Voltage
12*1w	24V/12V
15*1w	24V/12V
18*1w	24V/12V

Model: 220GM

IP68

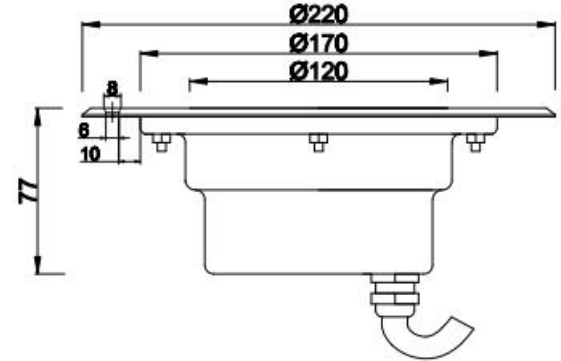

Housing: SUS 304# SS

Glass: Tempered glass T=8mm

Waterproof rubber cable with 1 meter

Light color choose:



Color temperature:

3000K-3500 WW

4000K-5000K PW

6000-6500K CW

Life-span: 50000hrs

Led chip: Epistar/Cree


Waterproof constant driver

Non-dimmable

Power	Voltage
12*1w	24V/12V
15*1w	24V/12V
18*1w	24V/12V

Model: 245GM

IP68

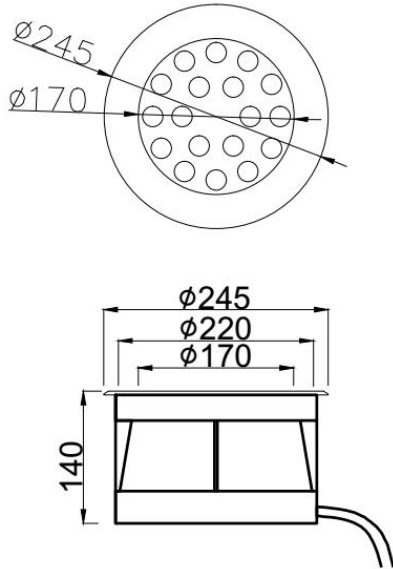

Housing: SUS 304# SS  
Glass: Tempered glass T=8mm  
Waterproof rubber cable with 1 meter

Light color choose:


Color temperature:  
3000K-3500 WW  
4000K-5000K PW  
6000-6500K CW

Life-span: 50000hrs  
Led chip: Epistar/Cree  
Waterproof constant driver  
Non-dimmable



Power	Voltage
12*1w	24V/12V
15*1w	24V/12V
18*1w	24V/12V



Installation:

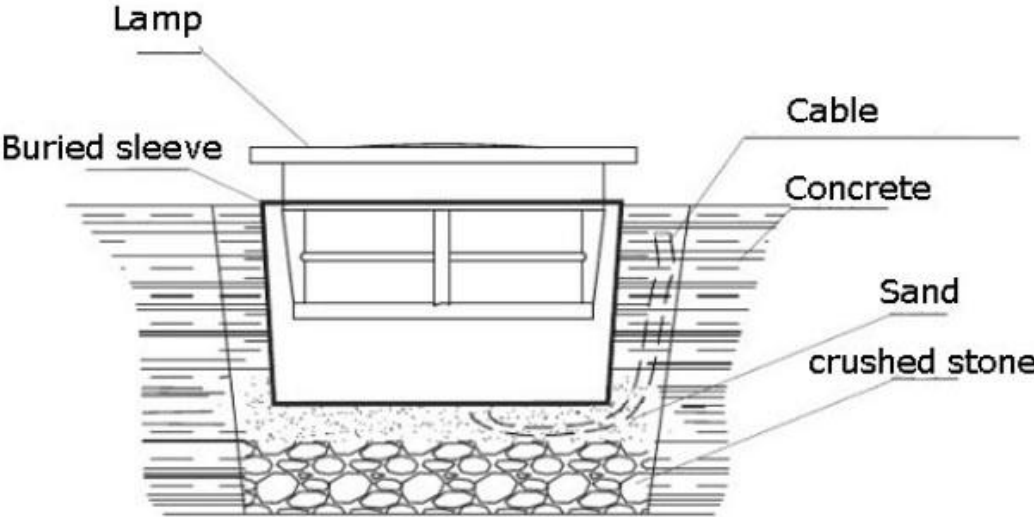


LED地埋灯安装方式  
The Installation of LED Underground Light

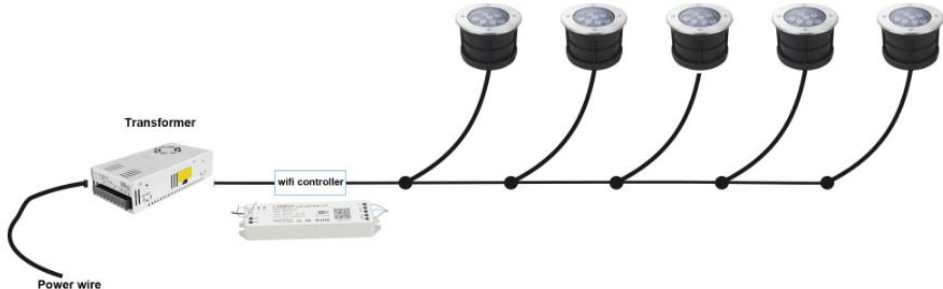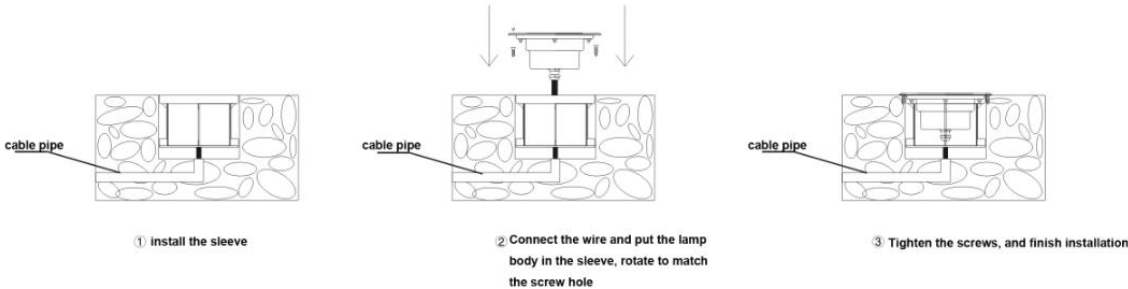



Model: 65ZM

IP65

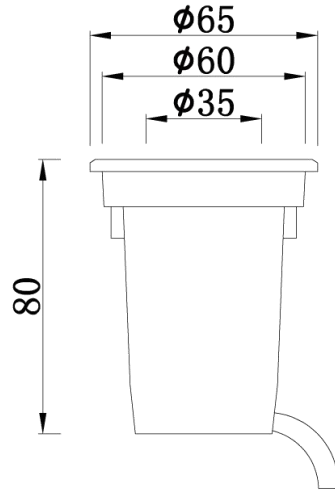

Housing: Aluminum body, SS panel.  
 Plastic embedded part  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter

Light color choose:



**Color temperature:**


- 3000K-3500 WW
- 4000K-5000K PW
- 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
1*1w	24V/12V

Model: 100ZM

IP65

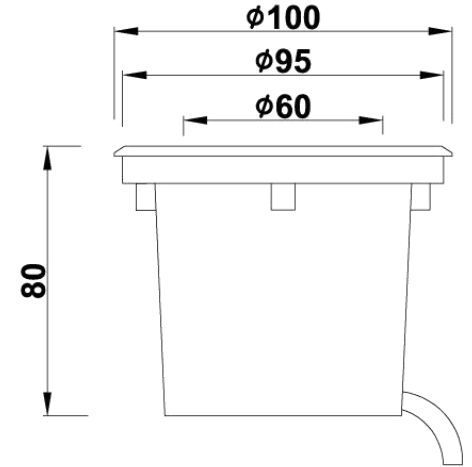

Housing: : Aluminum body, SS panel.  
 Plastic embedded part  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter

Light color choose:



**Color temperature:**


- 3000K-3500 WW
- 4000K-5000K PW
- 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
3*1w	24V/12V

Model: 150ZMS

IP65

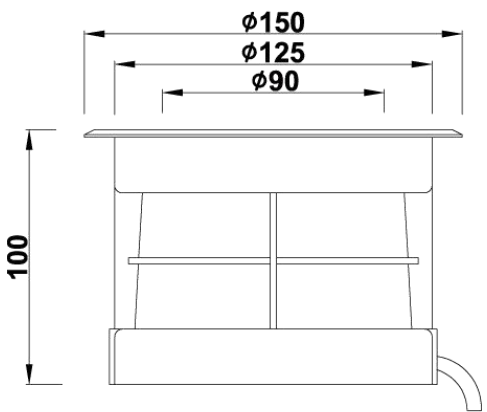

Housing: Aluminum body, SS panel.  
 Plastic embedded part  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter

Light color choose:



Color temperature:


- 3000K-3500 WW
- 4000K-5000K PW
- 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
5*1w	24V/12V
6*1W	24V/12V

Model: 180ZMS

IP65

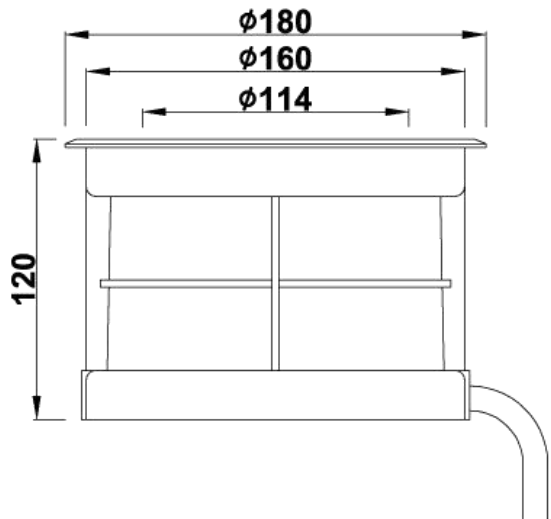

Housing: Aluminum body, SS panel.  
 Plastic embedded part  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter

Light color choose:



Color temperature:


- 3000K-3500 WW
- 4000K-5000K PW
- 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
9*1w	24V/12V
12*1W	24V/12V

Model: 200ZMS

IP65

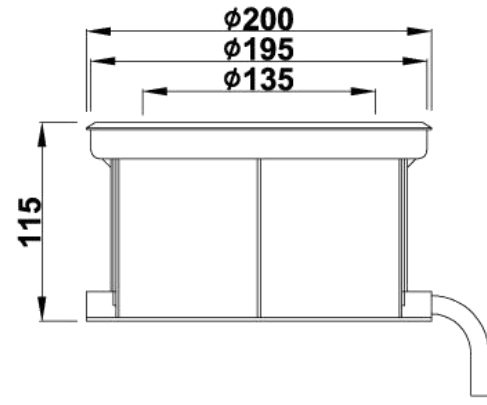

Housing: Aluminum body, SS panel.  
 Plastic embedded part  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter

Light color choose:  



**Color temperature:**  
 3000K-3500 WW  
 4000K-5000K PW  
 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
12*1w	24V/12V
15*1W	24V/12V
18*1W	24V/12V

Model: 250ZMS

IP65

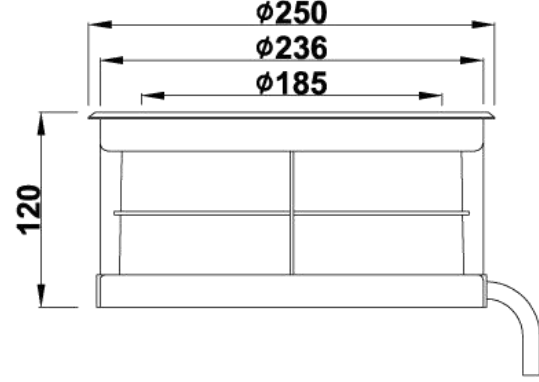

Housing: Aluminum body, SS panel.  
 Plastic embedded part  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter

Light color choose:  


Power	Voltage
18*1w	24V/12V
24*1W	24V/12V
30*1W	24V/12V
36*1W	24V/12V


**Color temperature:**  
 3000K-3500 WW  
 4000K-5000K PW  
 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Model: 300ZMS



IP65

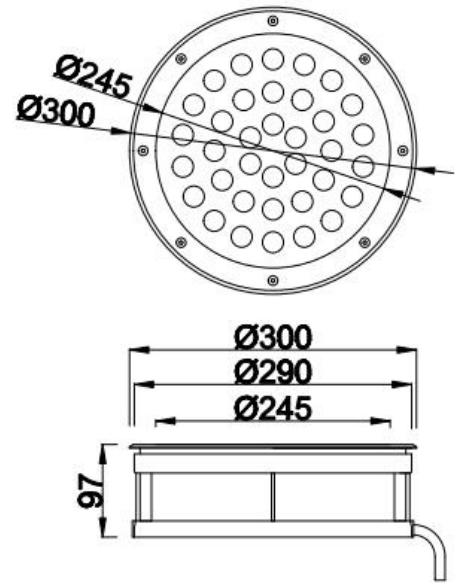

Housing: Aluminum body, SS panel.  
 Plastic embedded part  
 Glass: Tempered glass T=8mm  
 Waterproof rubber cable with 1 meter

Light color choose:  


**Color temperature:**  
 3000K-3500 WW  
 4000K-5000K PW  
 6000-6500K CW

Life-span: 50000hrs  
 Led chip: Epistar/Cree  
 Waterproof constant driver  
 Non-dimmable

Power	Voltage
12*1w	24V/12V
15*1W	24V/12V
18*1W	24V/12V

Model: D004



Power: 6w/9w

Light color choose:  


Model: D002



Power: 6W/9w/12w

Model: D001



Power: 3w/6w

Material: 304#SS Body  
 Tempered glass T=8mm  
 1 meter waterproof cable  
 2 years warranty

Model: D003



Power: 18W/24w/36w



Model: D008



Power: 9w/12w

Light color choose:



Model: D007



Power: 6W/9w

Model: D006



Power: 1w

Material: 304#SS Body  
Tempered glass T=8mm  
1 meter waterproof cable  
2 years warranty

Model: D005



Power: 3W/6w/9w

## LED FLOOD LIGHT

Model: T004



Power: 250W

Model: T005



Power: 300W

Model: T006



Power: 400W

Light color choose:



Model: T007



Power: 18w

Model: T008



Power: 36W

Model: T009



Power: 72W