

GFA190

GENFOR®
RoHS CE

单相三相二极有刷 & 无刷
Single/3 Phase 2-Pole
Brush & Brushless Self-Excited

发电机
Alternator





后罩输出
Back cover with Meter
Connector



单机 Alternator



带控制盒 With control box

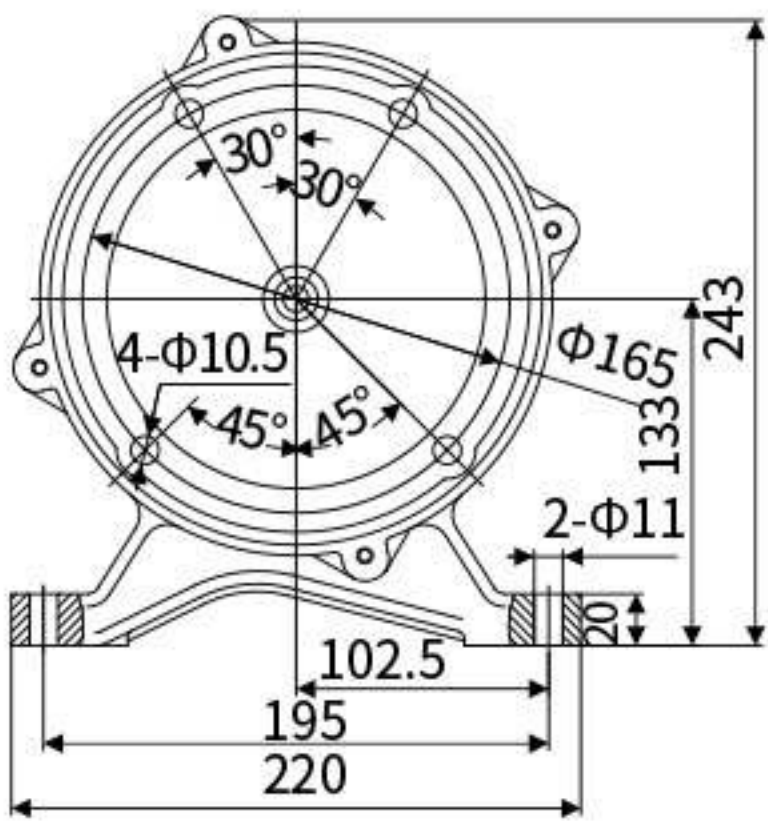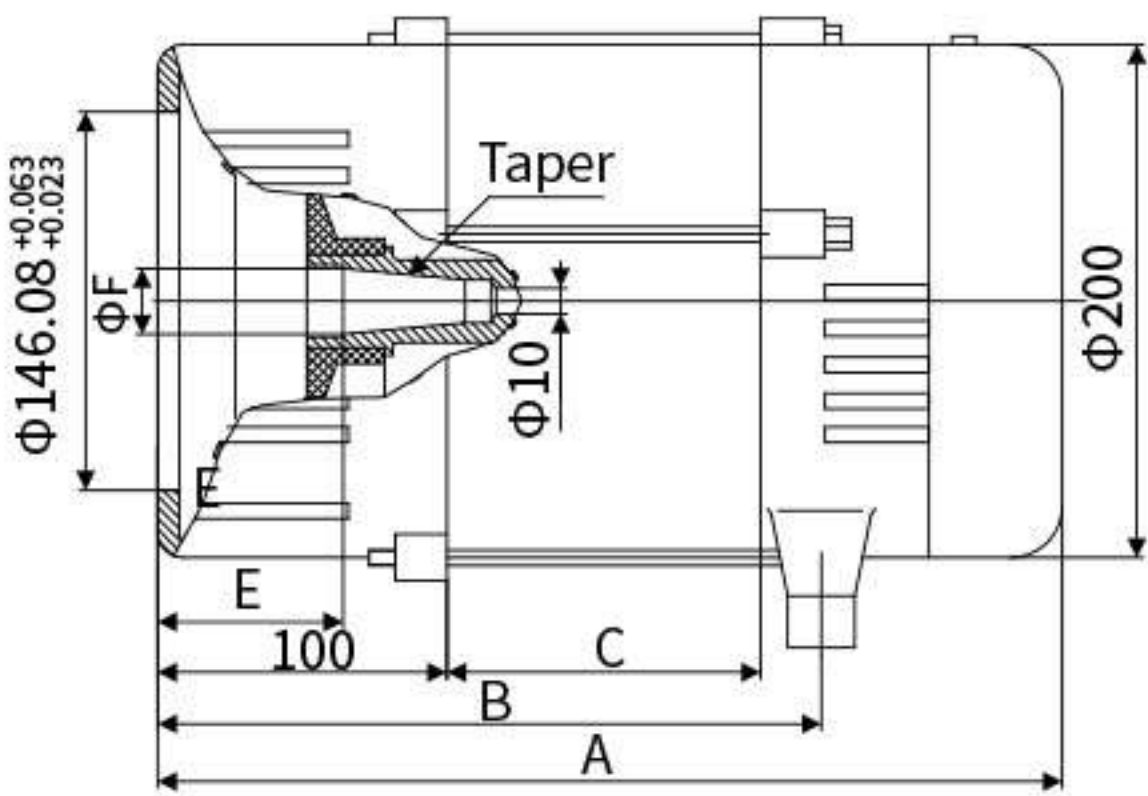

技术参数 TECHNICAL DATE

Note:The data for your information only ,and changes based on practicality.

型号 Type	额定功率 Rated Power (KVA)	最大功率 Max Power (KVA)	机器总尺寸及安装尺寸 Overall&Mounting Dimensions					
			A	B	C	E	ΦF	输出轴 Taper
GFA190-3.0 50Hz-3000r.p.m 60Hz-3600r.p.m	3.0 3.3	3.3 3.6	297	205	85	47	26	1:5
GFA190-3.5 50Hz-3000r.p.m 60Hz-3600r.p.m	3.5 4.0	3.8 4.4	312	220	100			
GFA190-4.0 50Hz-3000r.p.m 60Hz-3600r.p.m	4.0 4.5	4.5 5.0	337	245	125			
GFA190-5.0 50Hz-3000r.p.m 60Hz-3600r.p.m	5.0 5.8	5.5 6.4	352	260	140			
GFA190-6.0 50Hz-3000r.p.m 60Hz-3600r.p.m	6.0 7.0	5.5 7.5	362	270	150	63.2	25.4	1:5.333
GFA190-7.0 50Hz-3000r.p.m 60Hz-3600r.p.m	7.0 7.5	7.5 8.0	372	280	160			
GFA190-7.5 50Hz-3000r.p.m 60Hz-3600r.p.m	7.5 8.0	8.0 8.5	377	285	165			

- Insulation Class: CL.F ($\Delta T \leq 130K$)
- Power Factor: $\cos\phi=1$ (Single-phase); $\cos\phi=0.8$ (Three-phase)
- Rated Voltage: 110、115、120、220、230、240、110/220、115/230、120/240、220/380、230/400
- DC Output: 12V/8.3A(Optional)
- Excitation Type: Brush&Brushless
- Remarks: Dimensions marked above are according to Honda engine GX390

- 绝缘等级: CL.F($\Delta T \leq 130K$)
- 功率因数: $\cos\phi=1$ (单相); $\cos\phi=0.8$ (三相)
- 额定电压: 110、115、120、220、230、240、110/220、115/230、120/240、220/380、230/400
- 直流输出: 12V/8.3A (可选)
- 励磁方式: 有刷 & 无刷
- 注意事项: 外观尺寸依据本田动力 GX390 设定