



■ Features:


- 170-264 AC input
- Single Output
- 85% high efficiency
- 100% full load bur-in test
- Protection: OTP,OLP,OVP,SCP
- 0-10V/ Triac Dimmable
- CE ROHS Certified
- 2year warranty

Specifications


Product Code		CRS150-H1V12	CRS150-H1V24
Output	DC Voltage	12V	24V
	Rated Current	5A	6.25A
	Current Range	0~12.5A	0~6.25A
	Voltage tolerance	±5%	±5%
	Rated Power	150W	150W
	Ripple & Noise	<120mVp-p	<240mVp-p
	Set-up, Rise Time	1500ms, 30ms / 230VAC	
Input	Input voltage range	100-130V/ 170-264VAC	
	Frequency Range	50~60Hz	
	AC Current	2.7A / 115VAC; 1.35A / 230VAC	
	Efficiency	85%	88%
	PF	0.6	
Protection	Over Load	Above 110%-150% of rated power	
		Shut-down output voltage, auto recovery after fault condition is removed	
	Over Voltage	Above Max. Voltage (105% of rated voltage)	
		Shut-down output voltage, auto recovery after fault condition is removed	
	Over Temperature	Over 130°C detected on main IC control	
		Shut-down output voltage, auto recovery after fault condition is removed	
Ambiant	Working Temp. & humidity	"-20°C~+60°C, 20%~90%RH	
	Storage temp. & humidity	"-40°C~+85°C, 10%~95%RH	
Tesings	Withstand voltage	I/P-O/P: 3KVAC/1min;	
	Safety	GB4943 ;IEC60950-1; EN60950-1	
	EMC	EN55032:2015/AC:2016	
		EN61000-3-2:2014	
		EN61000-3-3:2013	
LVD	EN55024:2010+A1:2015		
Other	Lifespan	EN60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013	
	Demension(L*W*H)	20000hrs	
	Packing	287*49*29mm	
Note		0.4kg/pcs, 50pcs/21kg/CTN	
	1, The above mentioned data were measured at 230VAC input and 25°C.		
	2, Dis-connect the AC input before checking any mal-phenomenons.		
	3, Make sure the INPUT&OUPUT were in right situation before connected to power supply.		
	4, Datesheet for reference only. We suggest you take sampling before mass orders.		

■ Wire diagrams

Silica Controller

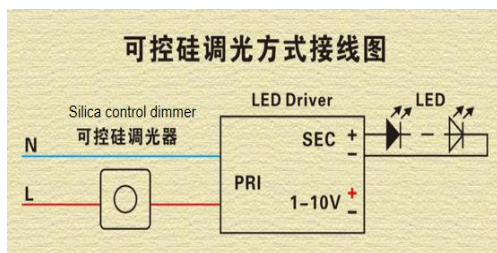

0/1-10V Signal

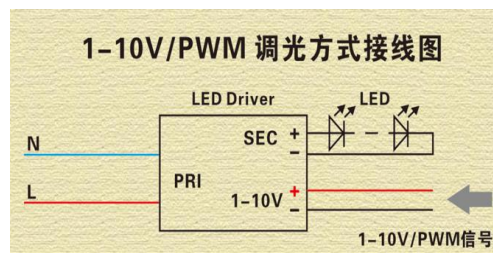

* Output voltage can be adjusted by connecting 1 pcs resistor or 1-10V DC voltage or 10V PWM signal

■ Voltage Adjusted by Silica controller

Adjust Voltage	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V
Rated Voltage ratio	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%

■ Voltage Adjusted by 10V PWM signal

Duty Cycle	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
Rated Voltage ratio	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%