

GFA160

GENFOR®
RoHS CE

单相二极有刷 & 无刷
Single Phase 2-Pole
Brush & Brushless Self-Excited

发电机
Alternator





后罩输出
Back cover with Meter
Connector



单机 Alternator



带控制盒 With control box

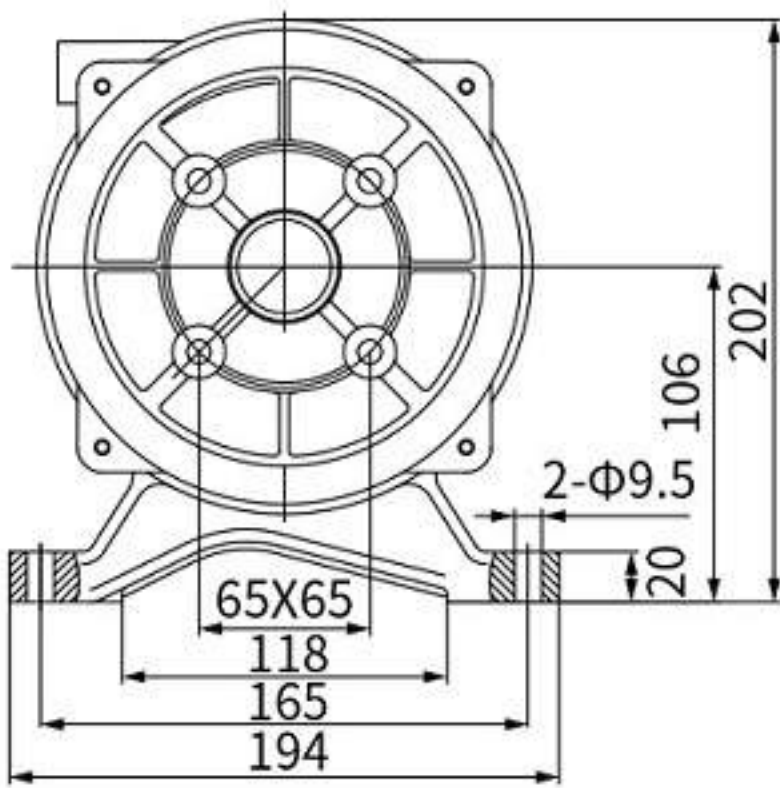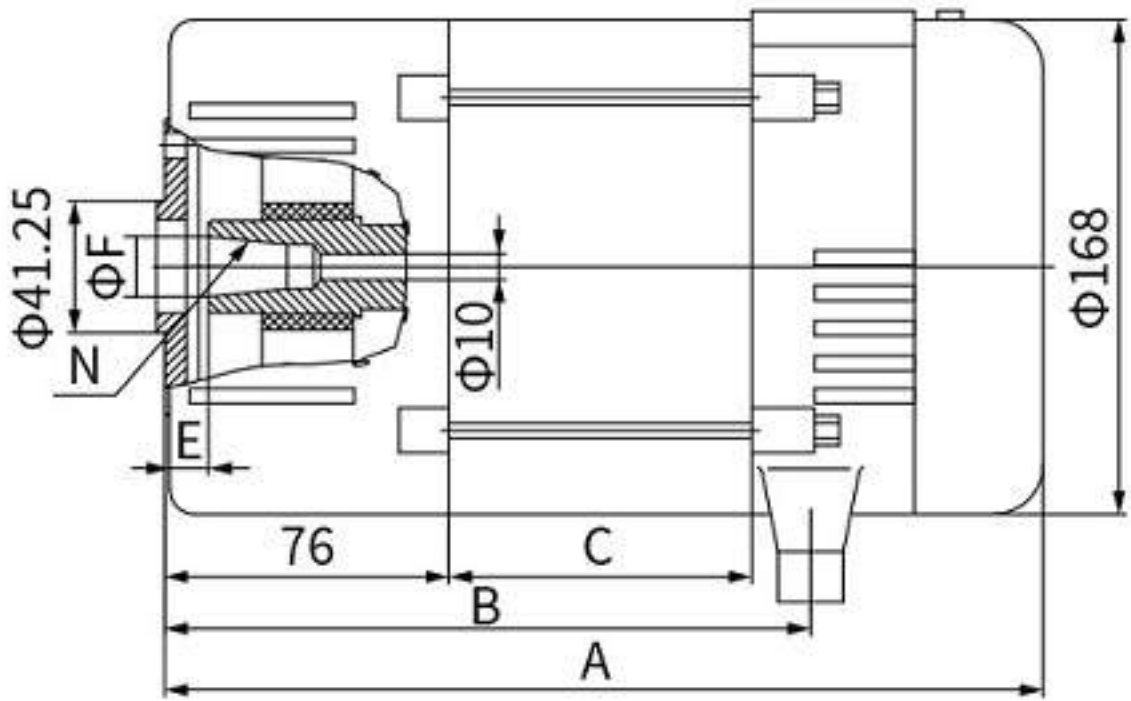

技术参数 TECHNICAL DATE

Note:The data for your information only ,and changes based on practicality.

型号 Type		额定功率 Rated Power (KVA)	最大功率 Max Power (KVA)	机器总尺寸及安装尺寸 Overall&Mounting Dimensions					
				A	B	C	E	ΦF	输出轴 Taper
GFA160-1.0	50Hz-3000r.p.m	1.0	1.1	221	157	54	23	17	1:5
	60Hz-3600r.p.m	1.2	1.3						
GFA160-1.3	50Hz-3000r.p.m	1.3	1.4	227	163	60			
	60Hz-3600r.p.m	1.5	1.7						
GFA160-1.5	50Hz-3000r.p.m	1.5	1.7	238	174	71			
	60Hz-3600r.p.m	1.8	2.0						
GFA160-2.0	50Hz-3000r.p.m	2.0	2.2	252	188	85			
	60Hz-3600r.p.m	2.2	2.5						
GFA160-2.5	50Hz-3000r.p.m	2.5	2.8	277	213	110			
	60Hz-3600r.p.m	2.8	3.0						
GFA160-3.0	50Hz-3000r.p.m	3.0	3.2	287	223	120	52.3	19.05	1:5.333
	60Hz-3600r.p.m	3.2	3.3						

- Insulation Class: CL.F($\Delta T \leq 130K$)
- Power Factor: $\cos\Phi=1$ (Single-phase)
- Rated Voltage: 110、115、120、220、230、240、110/220、115/230、120/240
- DC Output: 12V/8.3A(Optional)
- Excitation Type: Brush&Brushless
- Remarks: Dimensions marked above are according to Honda engine GX160/GX200

- 绝缘等级: CL.F($\Delta T \leq 130K$)
- 功率因数: $\cos\Phi=1$ (单相)
- 额定电压: 110、115、120、220、230、240、110/220、115/230、120/240
- 直流输出: 12V/8.3A (可选)
- 励磁方式: 有刷 & 无刷
- 注意事项: 外观尺寸依据本田动力 GX160 G200 设定