





DIMMABLE ELECTRONIC BALLASTS DMF-Series (*Programmed Start*)

Specification

Input voltage	220 Vac \pm 15% / 50 Hz
Control voltage	1 - 10 Vdc (0 V - off)
Control current	0.1 mA (source)
Standards	TIS 1955-2551, ISO 9001
Casing	Steel sheet coated with powder paint

Model	Lamp	Maximum input current	Minimum input power	Maximum input power	Power factor (@100% power)	THDi	Maximum case temperature	Maximum lamp cable length	Weight
EBZ-1801DMF	1 x 18 W (T8)	0.100 A	7 W	21 W	> 0.95	< 15%	90°C	1.5 m	0.29 kg
EBZ-3601DMF	1 x 36 W (T8)	0.185 A	10W	38 W	> 0.98	< 10%	90°C	1.5 m	0.29 kg

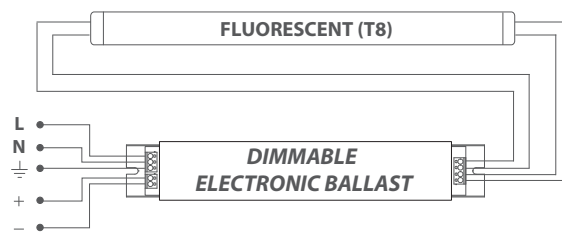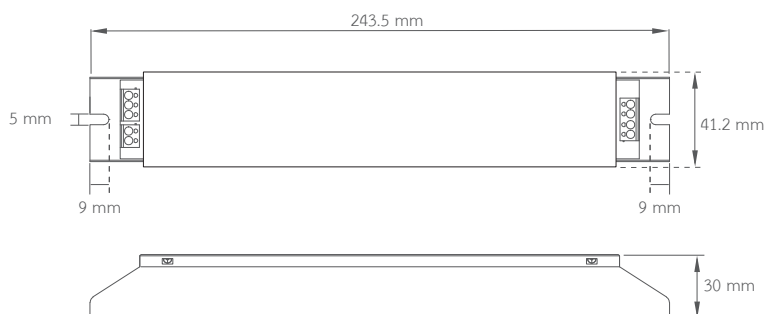

EBZ-1801DMF / EBZ-3601DMF

MEMO