


Viewline Pro

Glare-free linear lights with louvre




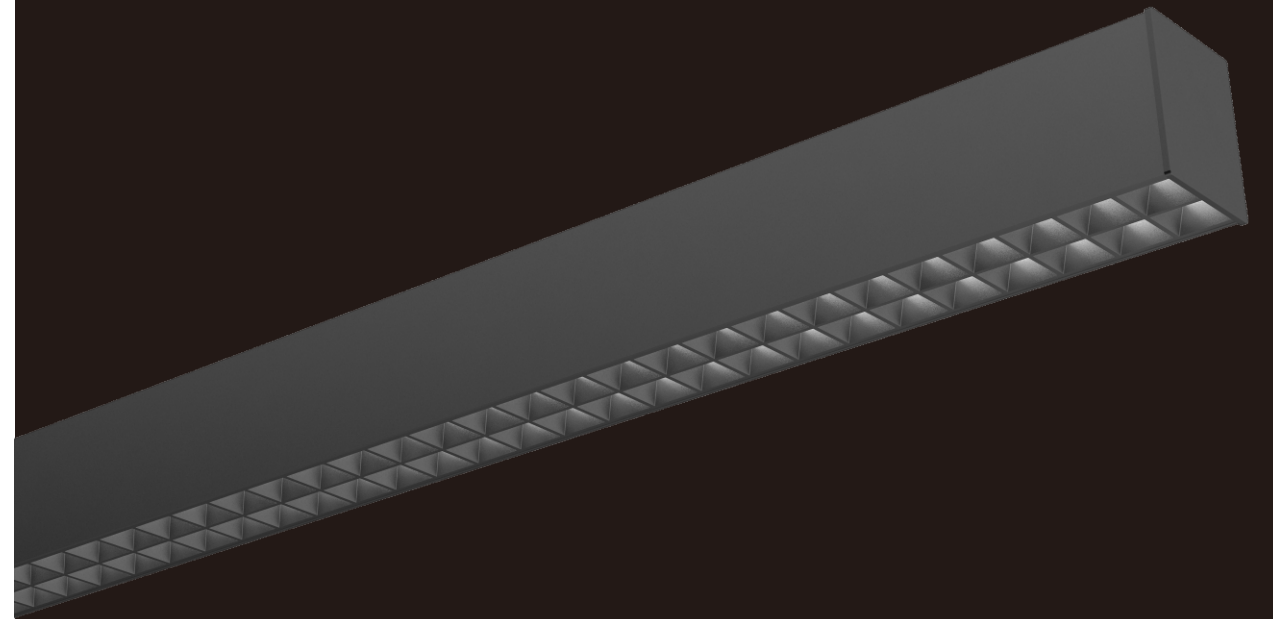

Human centric lighting

- ♥ Enhance people's well-being
- 🔄 Improve productivity
- ⌚ Comply with human biorhythm


Darklight optic




Indirect/direct light

Optimum glare control Uniform light

Thanks to its highly specular Darklight optic, Viewline provides superior lighting quality without reflected glare and ensure light source invisible to create comfortable sense. With special lens, Viewline offers optimum glare control, compatible with EN12464: $L65 < 1500 \text{cd/m}^2$ and $UGR < 13$ for workstations. The indirect lights enhance the uniformity and visual comfort due to the reflection of ceiling.



Indirect/direct light



Asymmetric

Slim type

Two beam patterns for different applications



Up to 115_{lm/W}

Perfectly blend into modern office

With straight-line element of design, Viewline could enhance spatial axes and express maximum linearity to blend perfectly into architectural space.

Viewline Free-standing Luminaires

Flexible , convenient and easy to operate






Versatile configuration for various workspace

The standalone type suits for individual workstation in the same length as the luminaire. Alternatively, the continuous-row type is ideal to be mounted in open plan office for teamwork with flexible arrangement of workstation.


Individual type




Continuous-row type









Viewline Pro Linear Lights Details

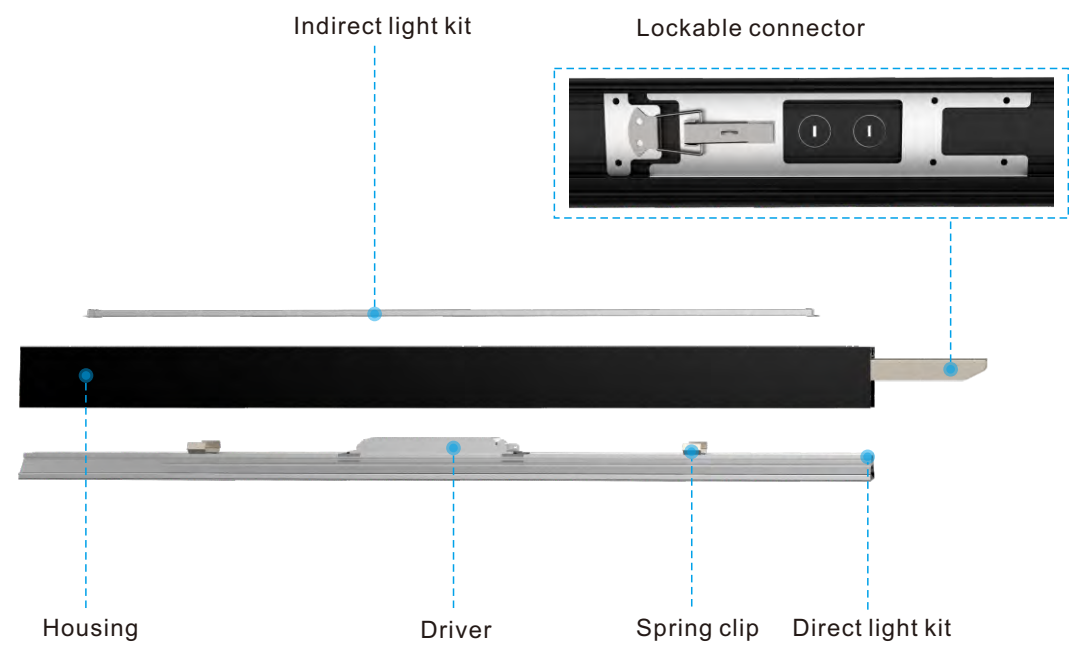

Modular design.Fast installation.Simple replacement.

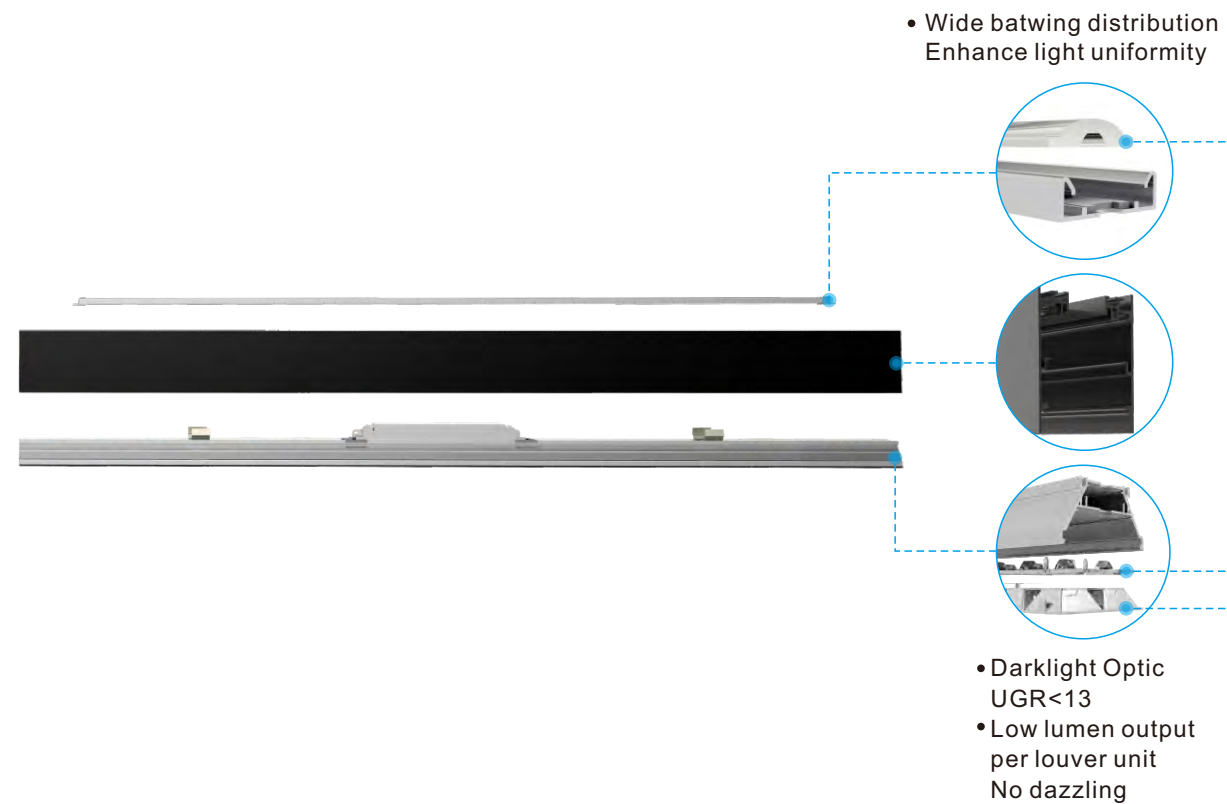


Viewline Pro Order Option

Mounting	Control	Dimensions	Configuration	Optics	CCT	Lumen	Color & Finish
 Recessed  Pendant  Surface-mounted  Free-standing	 ON/OFF  DALI  Push Dimming  Sensor  Emergency	 1200mm  1500mm  3000mm	 Individual  Continuous start  Continuous middle  Continuous end	 Direct light  Indirect/direct light  Asymmetric	 3000K  4000K  3000K-6500K	1200mm  2400lm(Direct light)  3200lm(Direct light)  1600lm ↑ +2400lm ↓ (Indirect/direct light) 1500mm  3000lm(Direct light)  4000lm(Direct light)  2000lm ↑ +3000lm ↓ (Indirect/direct light) 3000mm  6000lm(Direct light)  8000lm(Direct light)  4000lm ↑ +6000lm ↓ (Indirect/direct light)	 Black (RAL9005)

Viewline Pro linear lights direct




- Features
- Up to 115lm/W.
 - Optimal glare control, UGR<16, L65<1500cd/m².
 - Seamless connection and no light leakage.
 - Individual type and continuous row optional.
 - Can be flexibly connected to myriad of shape.
 - No flickering, visual comfort.
- Application
- Office, education, communication area.



Specifications

General		Optical	
• Size	1200mm,1500mm,3000mm	• Lumen	2400lm, 3200lm@1200mm, 3000lm, 4000lm@1500mm 6000lm, 8000lm@3000mm
• Color	Matt Black(RAL9005)	• CCT	3000K, 4000K
• Material	Housing: Aluminium	• CRI	>80Ra, >90Ra
	Lens: PMMA	• UGR	C0<16,C90<16 (X=4H,Y=8H)
	Louver: PC	• SDCM	≤3
	End cap: Aluminium	Durability	
		• Lifespan	50000H(L90, Tc=55°C)
Electrical		• Warranty	5 years
		• Operating	-35~45°C
• Efficacy	115lm/W	• IP Protection	IP20
• Wattage	23W,29W@1200mm,28W,36W@1500mm 55W,72W@3000mm	• IK Protection	IK02
• Voltage	200-240V		
• Frequency	50/60Hz		
• THD	<15%		


Dimensions



Viewline Pro linear lights indirect/direct



- Features
- Up to 115lm/W.
 - Optimal glare control, UGR<13, L65<1500cd/m².
 - Seamless connection and no light leakage.
 - Individual type and continuous row optional.
 - Can be flexibly connected to myriad of shape.
 - No flickering, visual comfort.
- Application
- Office, education, communication area.



Specifications

General		Optical	
• Size	1200mm,1500mm,3000mm	• Lumen	4000lm(1600lm↑+2400lm↓)@1200mm, 5000lm(2000lm↑+3000lm↓)@1500mm 10000lm(4000lm↑+6000lm↓)@3000mm
• Color	Matt Black(RAL9005)	• CCT	3000K,4000K
• Material	Housing: Aluminium	• CRI	>80Ra,>90Ra
	Lens: PMMA	• UGR	C0<13,C90<13 (X=4H,Y=8H)
	Louver: PC	• SDCM	≤3
	End cap: Aluminium	Durability	
		• Lifespan	50000H(L90, Tc=55°C)
Electrical		• Warranty	5 years
		• Operating	-35~45°C
• Efficacy	115lm/W	• IP Protection	IP20
• Wattage	36W@1200mm,45W@1500mm 90W@3000mm	• IK Protection	IK02
• Voltage	200-240V		
• Frequency	50/60Hz		
• THD	<15%		

Dimensions




Viewline slim linear lights direct



- Features**
- Up to 115lm/W.
 - Optimal glare control, UGR<16, L65<1500cd/m².
 - Seamless connection and no light leakage.
 - Can be flexibly connected to myriad of shape.
 - No flickering, visual comfort.

- Application**
- Office, education, communication area.

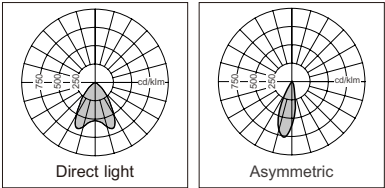

Specifications

General

- Size 1200mm,1500mm,3000mm
- Color Matt Black(RAL9005)
- Material Housing: Aluminium
Lens: PMMA
Louver: PC
End cap: Aluminium

Electrical

- Efficacy 115lm/W
- Wattage 23W,29W@1200mm,28W,36W@1500mm
55W,72W@3000mm
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

Dimensions




Viewline slim linear lights indirect/direct



- Features**
- Up to 115lm/W.
 - Optimal glare control, UGR<13, L65<1500cd/m².
 - Seamless connection and no light leakage.
 - Can be flexibly connected to myriad of shape.
 - No flickering, visual comfort.

- Application**
- Office, education, communication area.

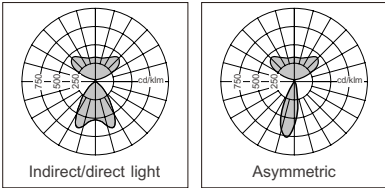

Specifications

General

- Size 1200mm,1500mm,3000mm
- Color Matt Black(RAL9005)
- Material Housing: Aluminium
Lens: PMMA
Louver: PC
End cap: Aluminium

Electrical

- Efficacy 115lm/W
- Wattage 36W@1200mm,45W@1500mm
90W@3000mm
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

Dimensions




Viewline free-standing luminaire



- Features**
- UGR<13, glare-free and uniform light.
 - Elegant and modular design.
 - Easy installation and operation.
 - Up to 115lm/W.
 - No flickering, visual comfort.

- Application**
- Office workspace.



Specifications


General

- Size 360x635x2258mm
- Color Matt White(RAL9016), matt black(RAL9005)
- Material Housing: Aluminium
Lens: PMMA
Louver reflector: PC

Electrical

- Efficacy 115lm/W
- Wattage 81W
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

Dimensions

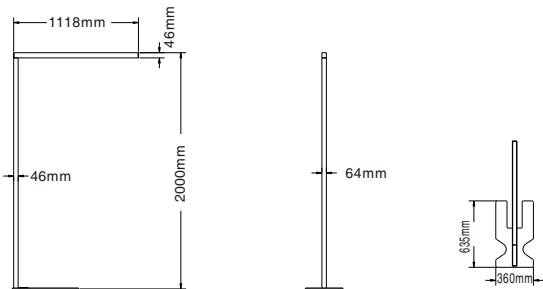

Optical

- Lumen 9000lm (6000lm ↑ +3000lm ↓)
- CCT 3000K, 4000K, 3000K-6500K tunable
- CRI >90Ra
- UGR <13
- SDCM ≤3

Durability

- Lifespan 50000H(L90, Tc=55°C)
- Warranty 5 years
- Operating -35~45°C
- IP Protection IP20
- IK Protection IK02



Viewline Pro

Glare-free linear lights with louvre

Sundopt LED Lighting Co.,Ltd.

sales@sundoptled.com
www.sundoptled.com