




Viewline Pro

Glare-free linear lights with louvre

OEM/ODM

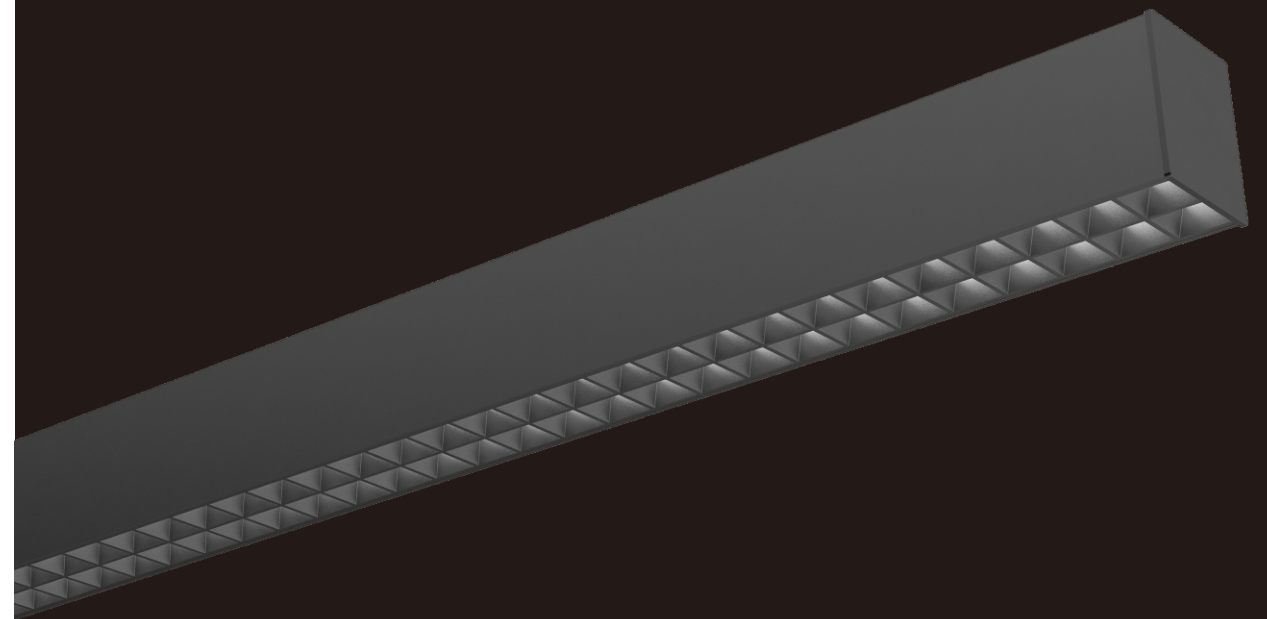




Human centric lighting

- ♥ Enhance people's well-being
- 🔄 Improve productivity
- ⌛ Comply with human biorhythm


Darklight optic




Indirect/direct light

Optimum glare control Uniform light

Thanks to its highly specular Darklight optic, Viewline provides superior lighting quality without reflected glare and ensure light source invisible to create comfortable sense. With special lens, Viewline offers optimum glare control, compatible with EN12464: $L65 < 1500 \text{cd/m}^2$ and $UGR < 13$ for workstations. The indirect lights enhance the uniformity and visual comfort due to the reflection of ceiling.



Indirect/direct light



Asymmetric

Slim type

Two beam patterns for different applications



Up to 115_{lm/W}

Perfectly blend into modern office

With straight-line element of design, Viewline could enhance spatial axes and express maximum linearity to blend perfectly into architectural space.

Viewline Free-standing Luminaires

Flexible , convenient and easy to operate






Versatile configuration for various workspace

The standalone type suits for individual workstation in the same length as the luminaire. Alternatively, the continuous-row type is ideal to be mounted in open plan office for teamwork with flexible arrangement of workstation.


Individual type




Continuous-row type











Viewline Pro Linear Lights Details

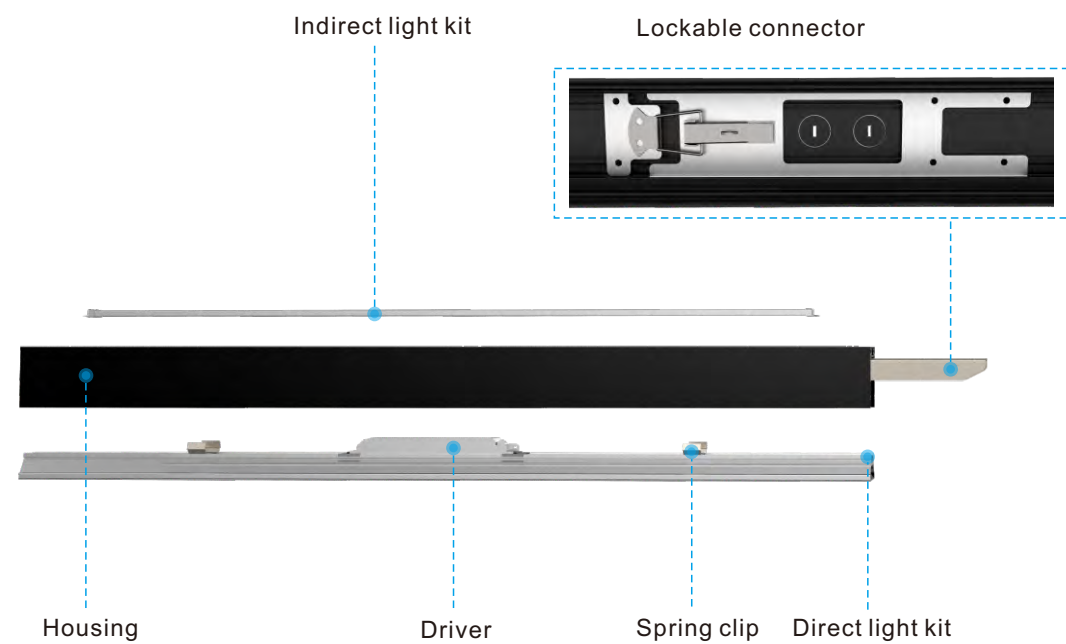

Modular design.Fast installation.Simple replacement.

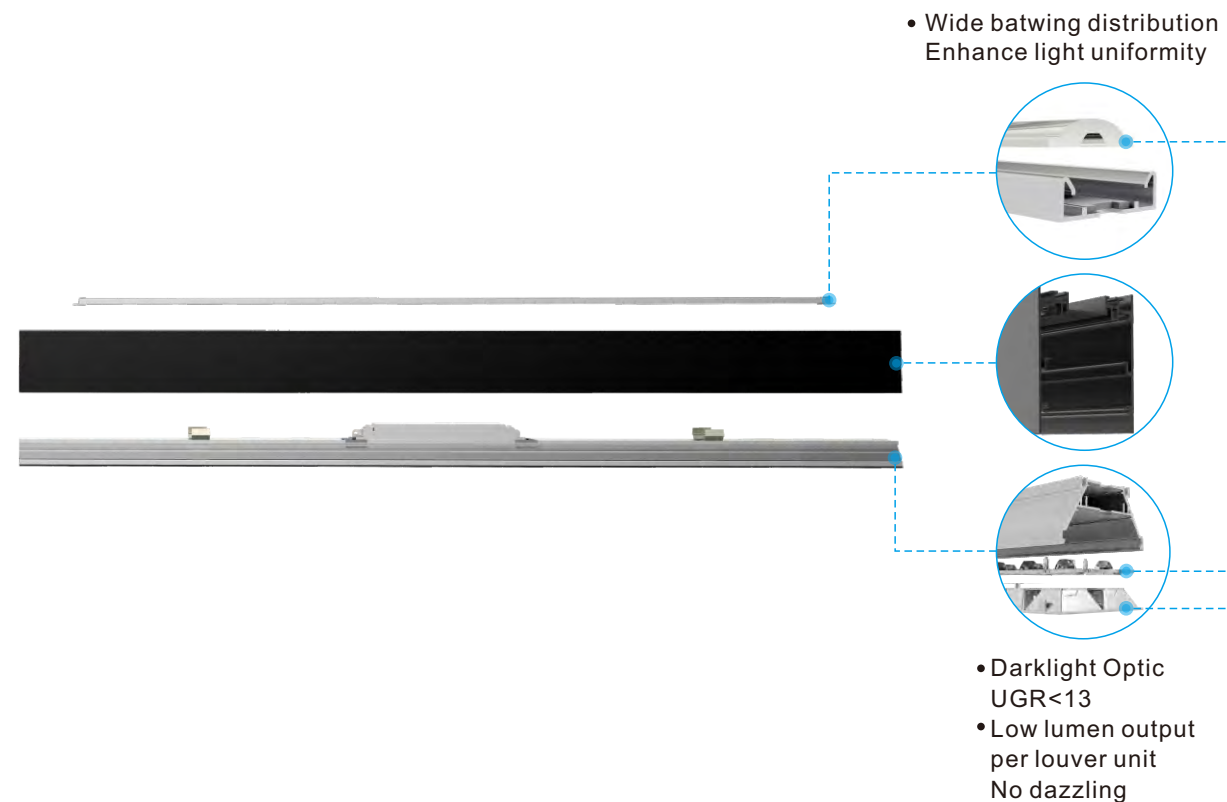


Viewline Pro Order Option

Mounting	Control	Dimensions	Configuration	Optics	CCT	Lumen	Color & Finish
 Recessed	 ON/OFF	 1200mm	 Individual	 Direct light	 3000K	1200mm  2400lm(Direct light)	 Black (RAL9005)
 Pendant	 DALI	 1500mm	 Continuous start		 4000K	 3200lm(Direct light)	
 Surface-mounted	 Push Dimming	 3000mm	 Continuous middle	 Indirect/direct light	 3000K-6500K	1600lm ↑ +2400lm ↓ (Indirect/direct light)	
			 Continuous end			1500mm  3000lm(Direct light)	
	 Sensor			 Asymmetric		 4000lm(Direct light)	
 Free-standing	 Emergency					 2000lm ↑ +3000lm ↓ (Indirect/direct light)	
						3000mm  6000lm(Direct light)	
						 8000lm(Direct light)	
						 4000lm ↑ +6000lm ↓ (Indirect/direct light)	

Viewline Pro linear lights direct



- Features**
- Up to 115lm/W.
 - Optimal glare control, UGR<16, L65<1500cd/m².
 - Seamless connection and no light leakage.
 - Individual type and continuous row optional.
 - Can be flexibly connected to myriad of shape.
 - No flickering, visual comfort.
- Application**
- Office, education, communication area.



Specifications


General

- Size 1200mm,1500mm,3000mm
- Color Matt Black(RAL9005)
- Material Housing: Aluminium
Lens: PMMA
Louver: PC
End cap: Aluminium

Electrical

- Efficacy 115lm/W
- Wattage 23W,29W@1200mm,28W,36W@1500mm
55W,72W@3000mm
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%


Dimensions



Viewline Pro linear lights indirect/direct



- Features**
- Up to 115lm/W.
 - Optimal glare control, UGR<13, L65<1500cd/m².
 - Seamless connection and no light leakage.
 - Individual type and continuous row optional.
 - Can be flexibly connected to myriad of shape.
 - No flickering, visual comfort.
- Application**
- Office, education, communication area.



Specifications

General

- Size 1200mm,1500mm,3000mm
- Color Matt Black(RAL9005)
- Material Housing: Aluminium
Lens: PMMA
Louver: PC
End cap: Aluminium

Electrical

- Efficacy 115lm/W
- Wattage 36W@1200mm,45W@1500mm
90W@3000mm
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

Dimensions




Viewline slim linear lights direct



- Features**
- Up to 115lm/W.
 - Optimal glare control, UGR<16, L65<1500cd/m².
 - Seamless connection and no light leakage.
 - Can be flexibly connected to myriad of shape.
 - No flickering, visual comfort.

- Application**
- Office, education, communication area.

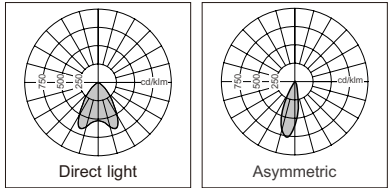

Specifications

General

- Size 1200mm, 1500mm, 3000mm
- Color Matt Black(RAL9005)
- Material Housing: Aluminium
Lens: PMMA
Louver: PC
End cap: Aluminium

Electrical

- Efficacy 115lm/W
- Wattage 23W, 29W@1200mm, 28W, 36W@1500mm
55W, 72W@3000mm
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

Dimensions




Viewline slim linear lights indirect/direct



- Features**
- Up to 115lm/W.
 - Optimal glare control, UGR<13, L65<1500cd/m².
 - Seamless connection and no light leakage.
 - Can be flexibly connected to myriad of shape.
 - No flickering, visual comfort.

- Application**
- Office, education, communication area.

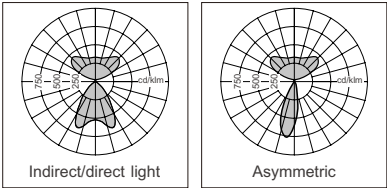

Specifications

General

- Size 1200mm, 1500mm, 3000mm
- Color Matt Black(RAL9005)
- Material Housing: Aluminium
Lens: PMMA
Louver: PC
End cap: Aluminium

Electrical

- Efficacy 115lm/W
- Wattage 36W@1200mm, 45W@1500mm
90W@3000mm
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

Dimensions




Viewline free-standing luminaire



- Features**
- UGR<13, glare-free and uniform light.
 - Elegant and modular design.
 - Easy installation and operation.
 - Up to 115lm/W.
 - No flickering, visual comfort.

- Application**
- Office workspace.



Specifications


General

- Size 360x635x2258mm
- Color Matt White(RAL9016), matt black(RAL9005)
- Material Housing: Aluminium
Lens: PMMA
Louver reflector: PC

Electrical

- Efficacy 115lm/W
- Wattage 81W
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

Dimensions

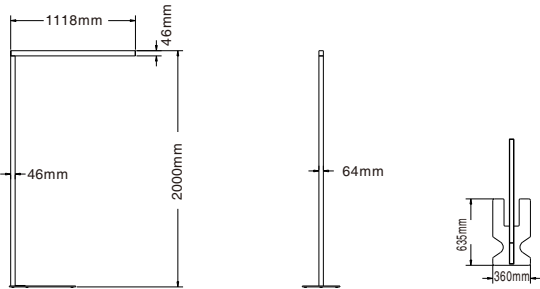

Optical

- Lumen 9000lm (6000lm ↑ +3000lm ↓)
- CCT 3000K, 4000K, 3000K-6500K tunable
- CRI >90Ra
- UGR <13
- SDCM ≤3

Durability

- Lifespan 50000H(L90, Tc=55°C)
- Warranty 5 years
- Operating -35~45°C
- IP Protection IP20
- IK Protection IK02

Viewline Pro

Glare-free linear lights with louvre



OEM/ODM

www.7-Mars.com