


## Out Line Drawing Of Oil Immersed Outdoor Current Transformers



| Symbol       | CT-24 |
|--------------|-------|
| H            | 600   |
| W            | 315   |
| L            | 375   |
| Total weight | 30 kg |

All dimension on outline drawing are in mm.

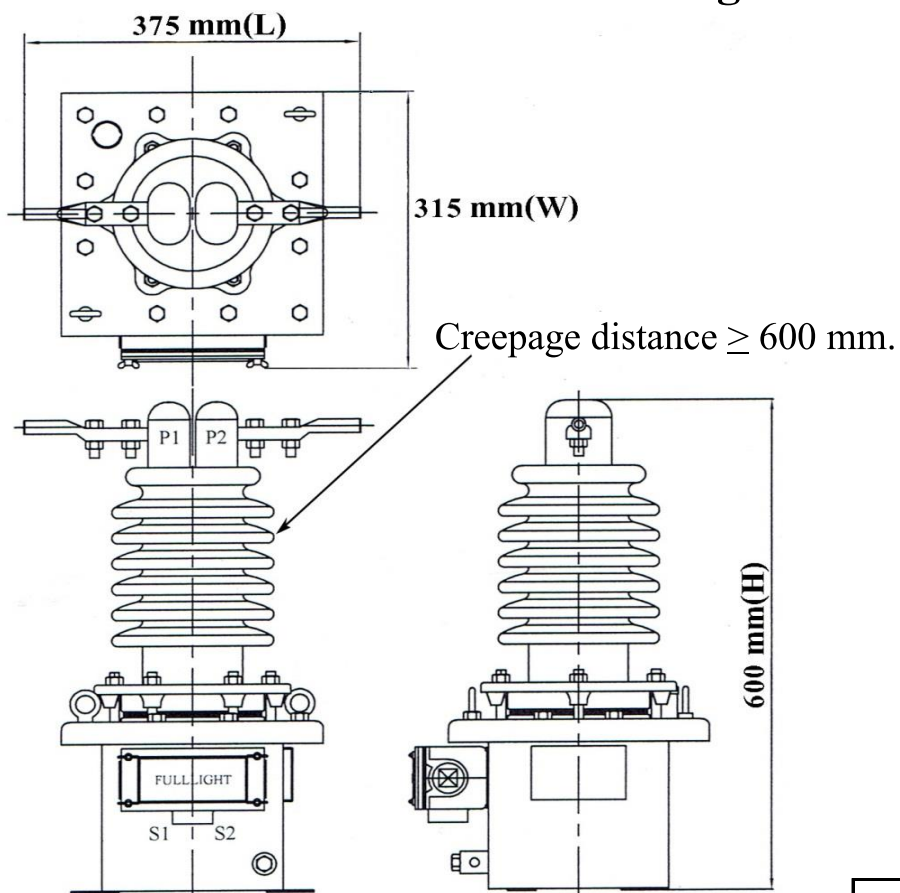

### Technical Data

- The Current transformer are in accordance with IEC 60044-1 and IEC 61869-2 standard
- Rate Voltage : 24 kV.
- Rate primary current and secondary current : 10/5A. , 20/5A. , 30/5A. , 50/5A. , 75/5A. , 100/5A. , on request.
- Rate frequency : 50Hz
- Polarity : subtractive
- Rated output : not less than 30 VA
- Accuracey class : 0.5
- Instrument security factor (FS) : Less than 5
- Impulse withstand voltage : 125 kV (peak)
- Dynamic current ( $I_{dyn}$ )  $2.5 I_{th}$

### Certification

ISO :   
 Cesi :  3982.2131049.0683  
 ทะเบียนผลิตภัณฑ์ : อก 0704/1927

### Energy Power Save CO.,LTD

Sales Agent : Puvanat Saikaew

Tel. : +66 089 006 0906  
 442/2 Chan Road, Thung Watdon

Tel. : +66 02 114 7145-9  
 E-Mail : [info@siamenergysaving.com](mailto:info@siamenergysaving.com)  
<http://www.siamenergysaving.com>