



www.szguanke.com



Alibaba



Facebook



LinkedIn



Youtube




# 2019 VERSION | PRODUCT CATALOG

ONE-STOP HID/HQI LED RETROFIT PURCHASE!



**Distributor :**

GLOBAL HID RETROFIT  
INNOVATION MANUFACTURER

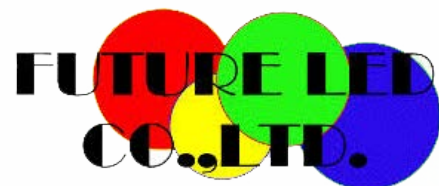

[www.7-mars.com](http://www.7-mars.com)



E-CATALOG DOWNLOAD



## ABOUT US



GK global service manufacturer established in 2006 and focused on LED corn bulb lamp over 9 years which located in Shenzhen, China with over 500 employees and 21,000s quare meters factory plant. GK is one of most professional manufacturers of LED corn light HID and MHL retrofit in China. we have a powerful R&D team and advanced detecting instruments which made 12-15 new products innovated per year. 85 patents were issued by domestic and overseas market is the great witness of our innovation. Our LED corn bulb lamp with certifications of UL, DLC, FCC, TUV, CE, ROHS, SAA, PSE which are mainly exported to North America, Europe, Australia, Japan and South Korea. Wide application of our LED corn bulb lamp is another attract factor for customers, here is the details: Post top, Acorn, Shoe box, Cobra head, Wall pack, Canopy, Flood light, Ball, High bay and Low bay .

We always insist "Quality first, Customer orient" and keep innovation for establishing a long-term cooperation with our clients. Trust us, make your wise decision today !

## PRODUCTS FAMILY



# CONTENTS

## 01 OMNI-DIRECTIONAL LIGHTING

P05-P18



## 02 HORIZONTAL LIGHTING

P21-P28



## 03 TEMPORARY WORK LIGHTS

P31-P36



## 04 HIGH BAY APPLICATION

P39-P44



## 05 ACCESSORIES

P47-P56



# 01 OMNI-DIRECTIONAL LIGHTING






# INTELLIGENT SENSORS LED CORN LAMP


GKS39-09  
36W 45W 54W 63W




 USD827878S  
 US2019162371A1  
 CN2017216135690  
 CN2018305157747



## ONE PRODUCT-MULTIPLE FUNCTIONAL USAGE

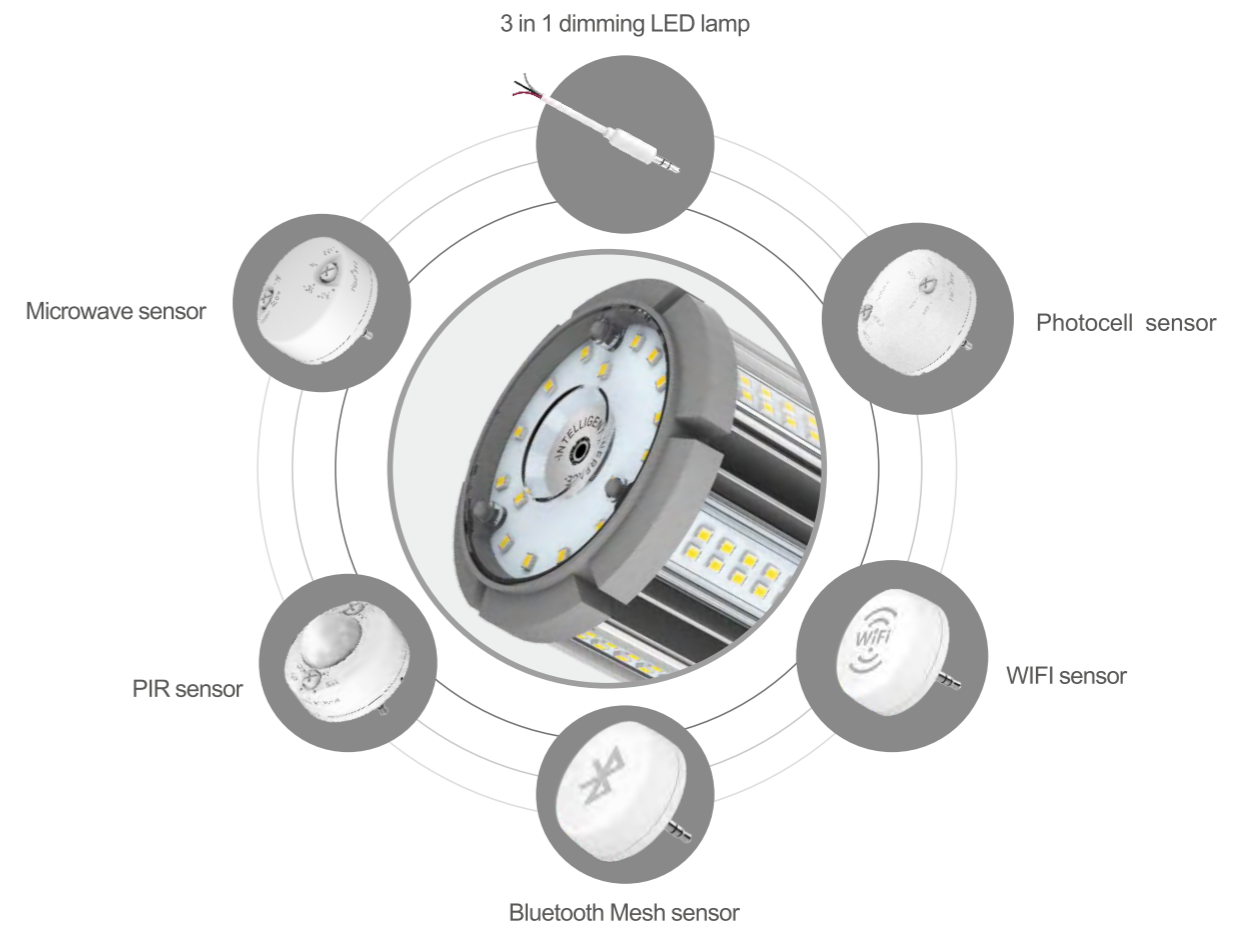

## APPLICATIONS



BASE	WATT	36W	45W	54W	63W
E26		Ø3.35*7.95	Ø3.35*9.13	Ø3.35*9.13	Ø3.35*9.72
E27		Ø3.35*8.07	Ø3.35*9.25	Ø3.35*9.25	Ø3.35*9.84
E39		Ø3.35*8.62	Ø3.35*9.80	Ø3.35*9.80	Ø3.35*10.39
E40		Ø3.35*8.78	Ø3.35*9.96	Ø3.35*9.96	Ø3.35*10.55

DxL(unit:inch inch x25.4=mm)


MODEL NO.	VOLTAGE	LUMEN	WEIGHT (1kg=2.2lbs)	EQUAL TO	CERTIFICATE
GKS39-36W-09	100-277VAC 50/60Hz	5400±200lm	NW 1.40lbs GW 1.65lbs	170W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS39-45W-09	100-277VAC 50/60Hz	6750±200lm	NW 1.61lbs GW 1.84lbs	200W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS39-54W-09	100-277VAC 50/60Hz	8100±200lm	NW 1.65lbs GW 1.91lbs	250W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS39-63W-09	100-277VAC 50/60Hz	9450±200lm	NW 1.81lbs GW 2.07lbs	320W HPS MHL HID	LM80 DLC cUL/UL LM79



# INTELLIGENT SENSORS LED CORN LAMP

GKS39-09  
80W 100W 120W

Frequency  
5.8G Hz

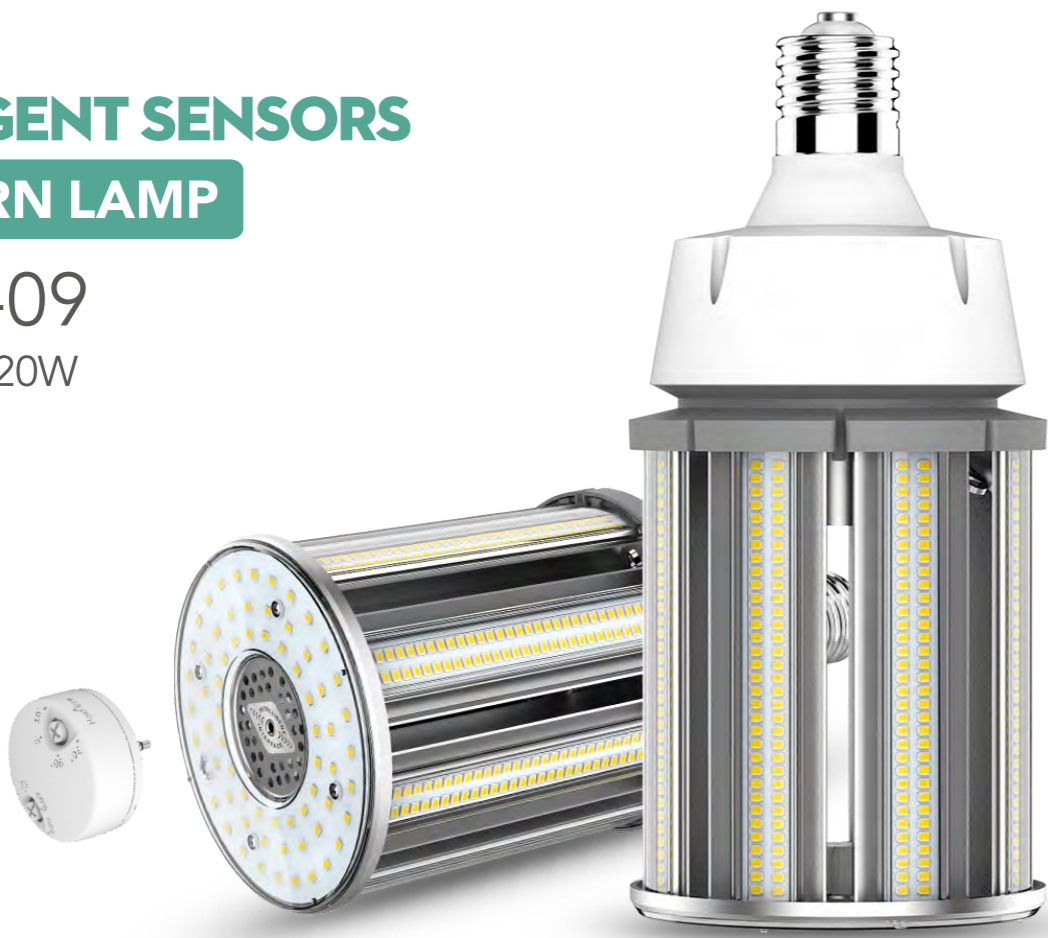


US PATENT  
USD827878S  
US2019162371A1  
CN2017216135690  
CN2018305157747




OMNI-DIRECTIONAL LIGHTING

GKS39-09

## ONE PRODUCT-MULTIPLE FUNCTIONAL USAGE

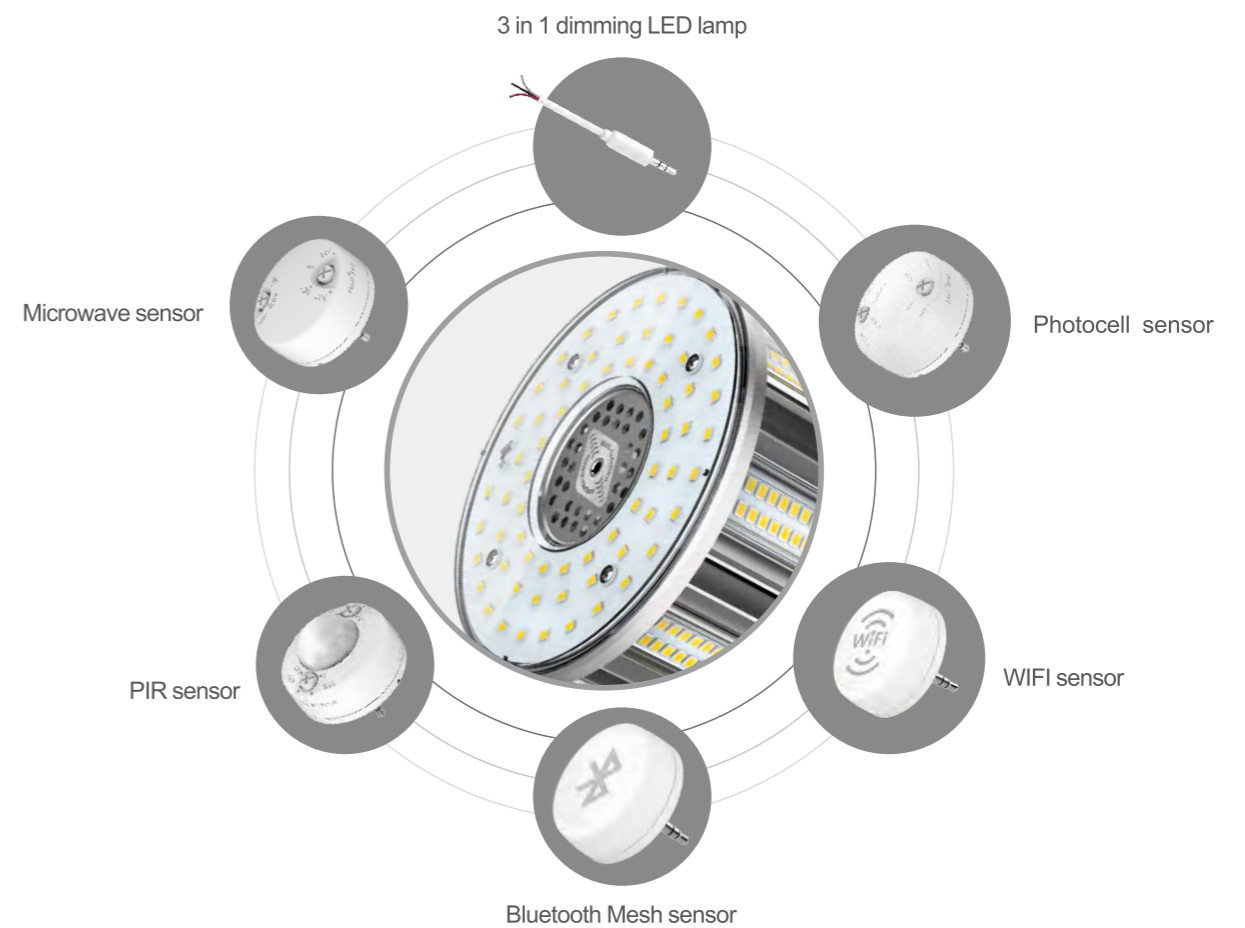

## APPLICATIONS



BASE	WATT	80W	100W	120W
E39		Ø5.12*9.72	Ø5.12*10.31	Ø5.12*11.14
E40		Ø5.12*9.84	Ø5.12*10.43	Ø5.12*11.26


DxL(unit:inch inch x25.4=mm)

MODEL NO.	VOLTAGE	LUMEN	WEIGHT (1kg=2.2lbs)	EQUAL TO	CERTIFICATE
GKS39-80W-09	100-277VAC 50/60Hz	12000±200lm	NW 2.93lbs GW 3.30lbs	250W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS39-100W-09	100-277VAC 50/60Hz	15000±200lm	NW 3.19lbs GW 3.56lbs	400W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS39-120W-09	100-277VAC 50/60Hz	18000±200lm	NW 3.48lbs GW 3.87lbs	500W HPS MHL HID	LM80 DLC cUL/UL LM79



ADVANTAGES


- Patent thermal management system; lighter weight E26/E39 base both available
- Suitable for enclosed fixture
- Working temperature: -40°F~140°F(-40°C~60°C) 50,000hours reliable lifespan
- High light efficiency SAMSUNG 2835 150Lm/W
- 12W-54W > 4kv; 63W >6kv high surge protection
- 5 years warranty
- Top quality driver components:
  - ① ST MOS (Italy &France)
  - ② INFINEON IC chip (Germany)
  - ③ Rubycon capacitor (Japan)
  - ④ PANJIT Diodes (Taiwan)

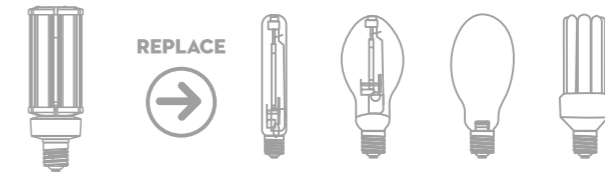


LED CORN LAMP

GKS39-02


12W 18W 27W  
36W 45W 54W 63W



US PATENT  
USD827878S  
US2019162371A1  
CN2017216135690  
CN2018305157747



APPLICATIONS

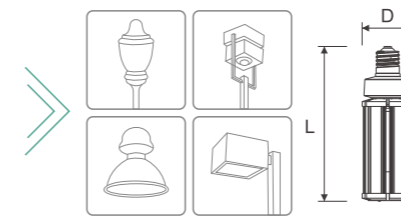







WATT	12W	18W	27W	36W	45W	54W	63W
E26	∅2.36*4.92	∅2.36*5.71	∅2.36*6.70	∅3.35*7.95	∅3.35*9.13	∅3.35*9.13	∅3.35*9.72
E27	∅2.36*5.00	∅2.36*5.79	∅2.36*6.77	∅3.35*8.07	∅3.35*9.25	∅3.35*9.25	∅3.35*9.84
E39	∅2.36*5.55	∅2.36*6.34	∅2.36*7.32	∅3.35*8.62	∅3.35*9.80	∅3.35*9.80	∅3.35*10.39
E40	∅2.36*5.71	∅2.36*6.50	∅2.36*7.48	∅3.35*8.78	∅3.35*9.96	∅3.35*9.96	∅3.35*10.55

DxL(unit:inch inch x25.4=mm)

MODEL NO.	VOLTAGE	LUMEN	WEIGHT (1kg=2.2lbs)	EQUAL TO	CERTIFICATE
GKS39-12W-02	100-277VAC 50/60Hz	1800±200lm	NW 0.46lbs GW 0.57lbs	50W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS39-18W-02	100-277VAC 50/60Hz	2700±200lm	NW 0.55lbs GW 0.66lbs	75W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS39-27W-02	100-277VAC 50/60Hz	4050±200lm	NW 0.66lbs GW 0.77lbs	150W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS39-36W-02	100-277VAC 50/60Hz	5400±200lm	NW 1.41lbs GW 1.65lbs	175W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS39-45W-02	100-277VAC 50/60Hz	6750±200lm	NW 1.61lbs GW 1.85lbs	200W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS39-54W-02	100-277VAC 50/60Hz	8100±200lm	NW 1.65lbs GW 1.91lbs	250W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS39-63W-02	100-277VAC 50/60Hz	9450±200lm	NW 1.80lbs GW 2.07lbs	320W HPS MHL HID	LM80 DLC cUL/UL LM79



ADVANTAGES

-  277-480V AC input voltage
-  Suitable for enclosed fixture
-  Working temperature: -40°F~140°F(-40°C~60°C)  
50,000hours reliable lifespan
-  High light efficiency SAMSUNG  
2835 150Lm/W
-  36W 54W > 4kv; 100W >6kv  
high surge protection
-  5 years warranty
-  Top quality driver components:
  - ① ST MOS (Italy & France)
  - ② INFINEON IC chip (Germany)
  - ③ Rubycon capacitor (Japan)
  - ④ PANJIT Diodes (Taiwan)


VOLTAGE  
277-480V AC


LED CORN LAMP

GKS39  
36W 54W 100W


150  
lm/w




 USD827878S  
 US2019162371A1  
 CN2017216135690  
 CN2018305157747

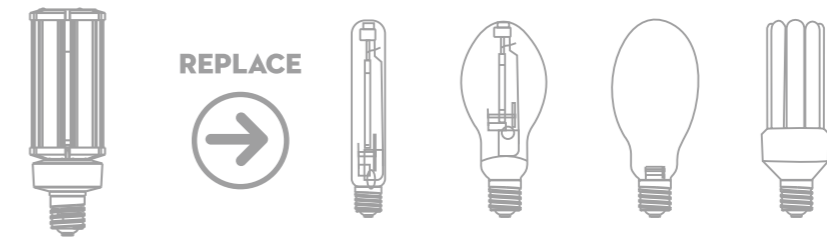

APPLICATIONS



BASE	WATT	36W	54W	100W
E26		Ø3.35*7.95	Ø3.35*9.13	Ø3.35*9.72
E27		Ø3.35*8.07	Ø3.35*9.25	Ø3.35*9.84
E39		Ø3.35*8.62	Ø3.35*9.80	Ø3.35*10.39
E40		Ø3.35*8.78	Ø3.35*9.96	Ø3.35*10.55

DxL(unit:inch inch x25.4=mm)

MODEL NO.	VOLTAGE	LUMEN	WEIGHT (1kg=2.2lbs)	EQUAL TO	CERTIFICATE
GKS39-36W	277-480VAC 50/60Hz	5400±200lm	NW 1.41lbs GW 1.65lbs	175W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS39-54W	277-480VAC 50/60Hz	8100±200lm	NW 1.61lbs GW 1.85lbs	250W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS39-100W	277-480VAC 50/60Hz	15000±200lm	NW 3.19lbs GW 3.56lbs	400W HPS MHL HID	LM80 DLC cUL/UL LM79



# DARK SKY LED CORN LAMP

No light pollution

## GKS28PLUS

19W 24W 27W 36W 45W 54W



US10281109B2  
CN2016211220917




### OMNI-DIRECTIONAL LIGHTING

### GKS28PLUS

#### ADVANTAGES

- Patent design, Isolated driver, perfect heat dissipation system
- Suitable for enclosed fixture
- Working temperature: -40°F~140°F(-40°C~60°C) 50,000hours reliable lifespan
- LG 5630 110LM/W
- 4KV Surge protection
- Dark sky friendly, avoid light pollution
- Top quality driver components:
  - ① FIRST MOS(USA)
  - ② MPS IC Chip (USA)
  - ③ Rubycon capacitor (Japan)
  - ④ Galaxy Diodes (biggest in China)

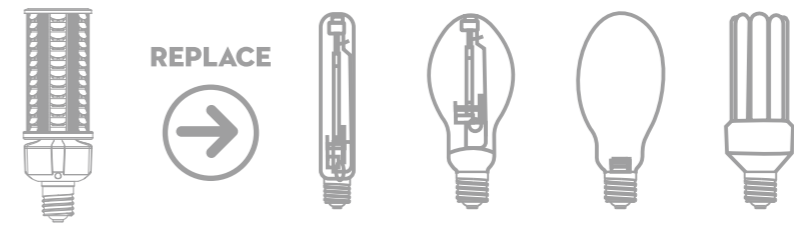

#### APPLICATIONS



WATT	BASE	E26	E27	E39	EX39	E40
19W		∅2.52*6.85	∅2.52*6.89	∅2.52*7.28	--	∅2.52*7.48
24W		∅2.52*7.32	∅2.52*7.36	∅2.52*7.76	--	∅2.52*7.95
27W		∅3.43*7.56	∅3.43*7.64	∅3.43*8.00	∅3.43*8.03	∅3.43*8.19
36W		∅3.43*8.03	∅3.43*8.11	∅3.43*8.50	∅3.43*8.82	∅3.43*8.98
45W		∅3.43*8.97	∅3.43*9.06	∅3.43*9.41	∅3.43*9.45	∅3.43*9.61
54W		∅3.43*9.92	∅3.43*10.00	∅3.43*10.35	∅3.43*10.39	∅3.43*10.55

DxL(unit:inch inch x25.4=mm)

MODEL NO.	VOLTAGE	LUMEN	WEIGHT (1kg=2.2lbs)	EQUAL TO	CERTIFICATE
GKS28-19W PLUS	100-277VAC 50/60Hz	1900±200lm	NW 0.75lbs GW 0.86lbs	75W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS28-24W PLUS	100-277VAC 50/60Hz	2400±200lm	NW 0.79lbs GW 0.90lbs	100W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS28-27W PLUS	100-277VAC 50/60Hz	2900±200lm	NW 1.54lbs GW 1.76lbs	125W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS28-36W PLUS	100-277VAC 50/60Hz	3900±200lm	NW 1.59lbs GW 1.81lbs	150W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS28-45W PLUS	100-277VAC 50/60Hz	4900±200lm	NW 1.76lbs GW 1.98lbs	175W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS28-54W PLUS	100-277VAC 50/60Hz	5900±200lm	NW 1.94lbs GW 2.20lbs	200W HPS MHL HID	LM80 DLC cUL/UL LM79





FOR A BETTER FUTURE OF WILD LIVES

WAVE LENGTH  
**580-620NM**

Spectrum  
1.0 = 4.872e+001mW/n

## SEA TURTLE LIGHTING

Amber color

# GKS39-04

12W 18W 27W  
36W 45W 54W 63W



### APPLICATIONS

BASE	WATT	12W	18W	27W	36W	45W	54W	63W
E26		Ø2.36*4.92	Ø2.36*5.71	Ø2.36*6.70	Ø3.35*7.95	Ø3.35*9.13	Ø3.35*9.13	Ø3.35*9.72
E27		Ø2.36*5.00	Ø2.36*5.79	Ø2.36*6.77	Ø3.35*8.07	Ø3.35*9.25	Ø3.35*9.25	Ø3.35*9.84
E39		Ø2.36*5.55	Ø2.36*6.34	Ø2.36*7.32	Ø3.35*8.62	Ø3.35*9.80	Ø3.35*9.80	Ø3.35*10.39
E40		Ø2.36*5.71	Ø2.36*6.50	Ø2.36*7.48	Ø3.35*8.78	Ø3.35*9.96	Ø3.35*9.96	Ø3.35*10.55

DxL(unit:inch inch x25.4=mm)

MODEL NO.	VOLTAGE	WAVE LENGTH	WEIGHT (1kg=2.2lbs)	EQUAL TO	CERTIFICATE
GKS39-12W-04	100-277VAC 50/60Hz	580-620NM	NW 0.46lbs GW 0.57lbs	50W HPS MHL HID	Lm80 cUL/UL LM79
GKS39-18W-04	100-277VAC 50/60Hz	580-620NM	NW 0.55lbs GW 0.66lbs	75W HPS MHL HID	Lm80 cUL/UL LM79
GKS39-27W-04	100-277VAC 50/60Hz	580-620NM	NW 0.66lbs GW 0.77lbs	150W HPS MHL HID	Lm80 cUL/UL LM79
GKS39-36W-04	100-277VAC 50/60Hz	580-620NM	NW 1.41lbs GW 1.65lbs	175W HPS MHL HID	Lm80 cUL/UL LM79
GKS39-45W-04	100-277VAC 50/60Hz	580-620NM	NW 1.61lbs GW 1.85lbs	200W HPS MHL HID	Lm80 cUL/UL LM79
GKS39-54W-04	100-277VAC 50/60Hz	580-620NM	NW 1.65lbs GW 1.91lbs	250W HPS MHL HID	Lm80 cUL/UL LM79
GKS39-63W-04	100-277VAC 50/60Hz	580-620NM	NW 1.80lbs GW 2.07lbs	320W HPS MHL HID	Lm80 cUL/UL LM79



# TULIP CORN BULBS

## GKS23

30W 40W 50W



CN2015201121802  
CN2015300463899



### OMNI-DIRECTIONAL LIGHTING

**GKS23**

### ADVANTAGES



Patent design, Isolated driver, perfect heat dissipation system



IP65 waterproof



5 years warranty



High light efficiency LG 5630 130Lm/W



4KV Surge protection



Working temperature : -40°F~140°F(-40°C~ 60°C)




Top quality driver components:



- ① FIRST MOS(USA)
- ③ Rubycon capacitor (Japan)

② MPS IC Chip (USA)

④ Galaxy Diodes (biggest in China)

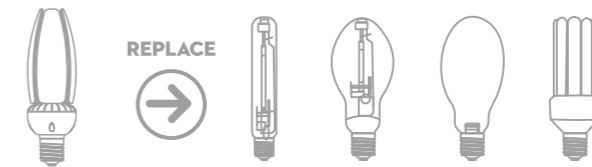

### APPLICATIONS




WATT	BASE	E26	E27	E39	E40
30W		Ø3.27*9.45	Ø3.27*9.84	Ø3.27*10.12	Ø3.27*10.51
40W		Ø3.27*9.45	Ø3.27*9.84	Ø3.27*10.12	Ø3.27*10.51
50W		Ø3.27*9.45	Ø3.27*9.84	Ø3.27*10.12	Ø3.27*10.51

DxL(unit:inch inch x25.4=mm)


MODEL NO.	VOLTAGE	LUMEN	WEIGHT (1kg=2.2lbs)	EQUAL TO	CERTIFICATE
GKS23-30W	100-277VAC 50/60Hz	3900±200lm	NW 1.62lbs GW 1.89lbs	125W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS23-40W	100-277VAC 50/60Hz	5200±200lm	NW 1.63lbs GW 1.90lbs	175W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS23-50W	100-277VAC 50/60Hz	6500±200lm	NW 1.64lbs GW 1.91lbs	200W HPS MHL HID	LM80 DLC cUL/UL LM79

# 02 HORIZONTAL LIGHTING

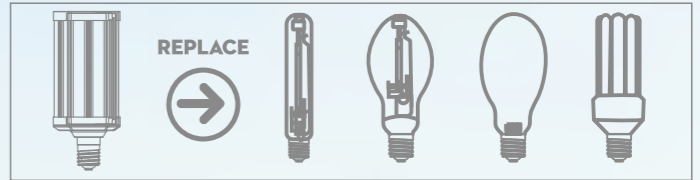




ONE PRODUCT- MULTIPLE FUNCTIONAL USAGE

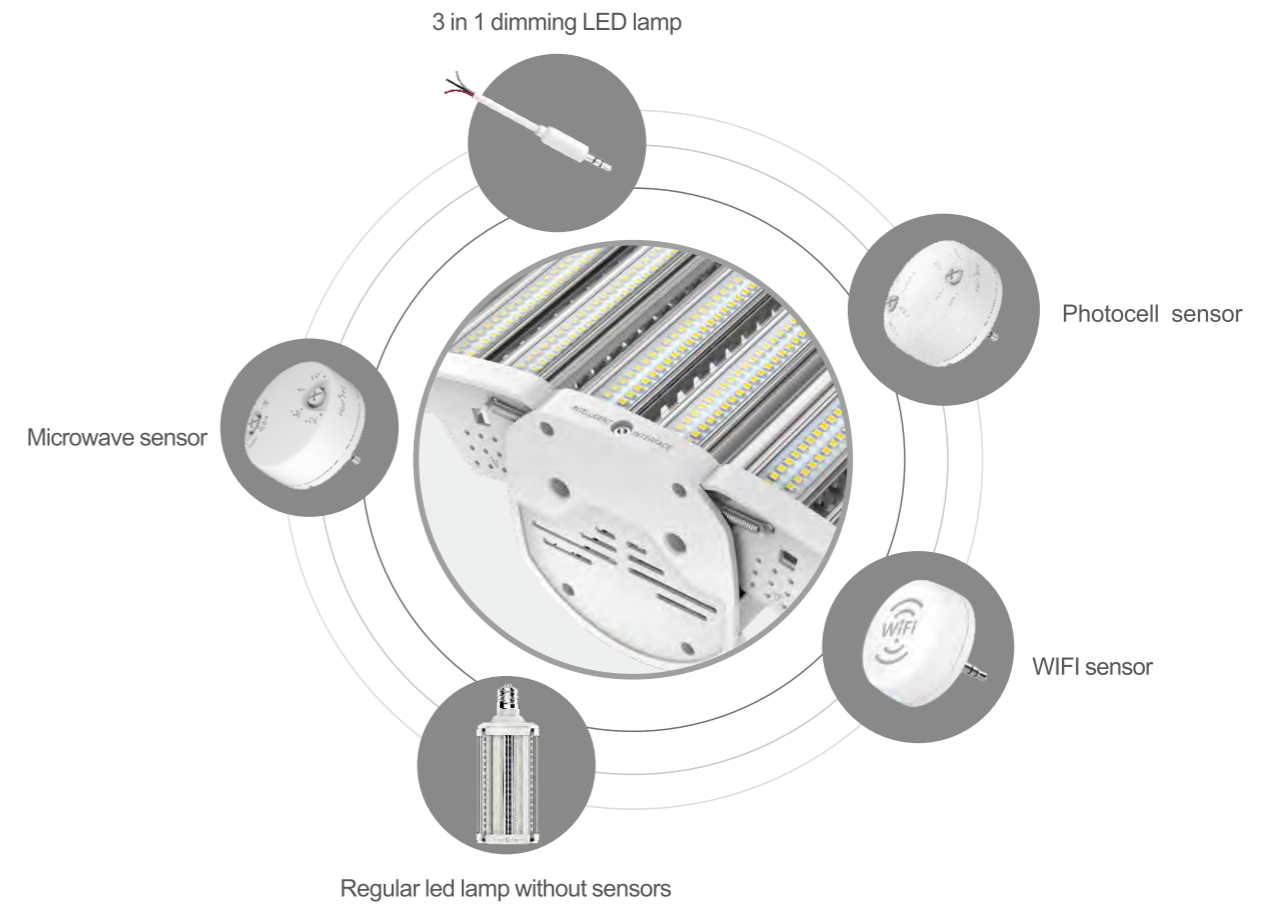

**INTELLIGENT SENSORS**  
**LED AREA LIGHT**

GKS35-10  
80W 110W

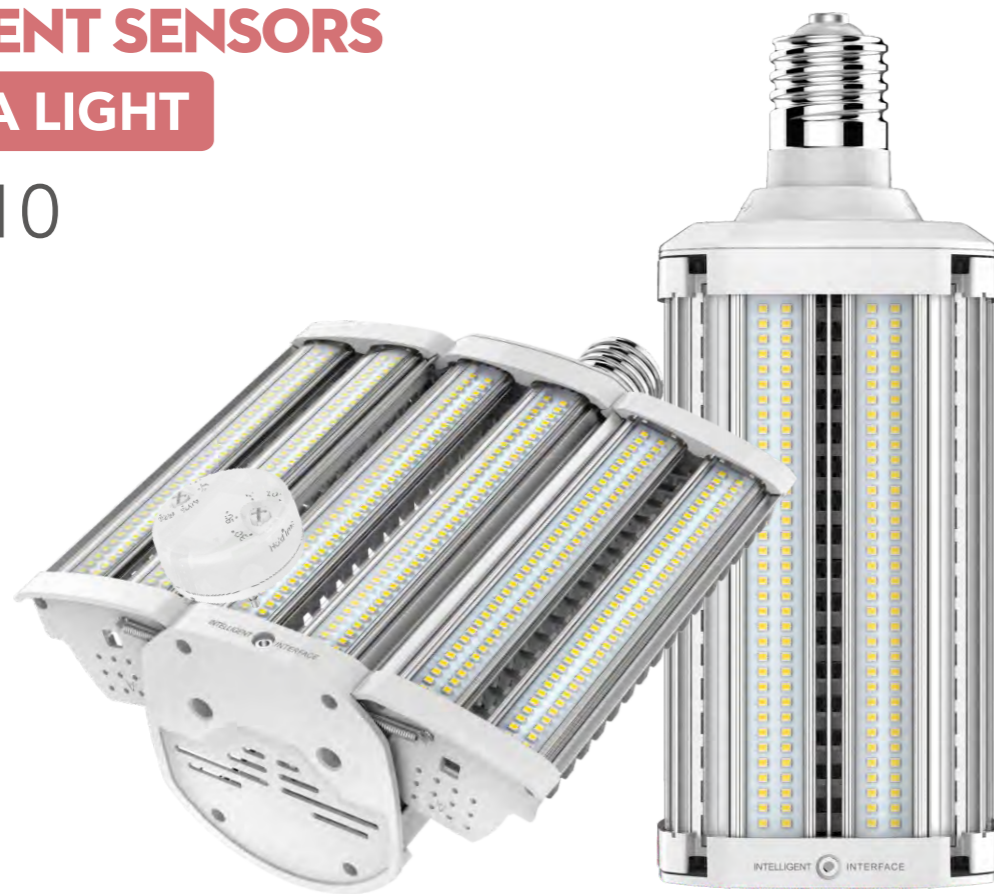

Frequency  
5.8G Hz



US9951931B1  
CN2016210663975  
CN2016304758009



**DIMENSIONS** D x L (unit: inch inch x 25.4 = mm)

WATT	BASE	E39	WATT	BASE	E39	GKS35-110W		HID400W	
80W(CLOSE)		Ø4.37*8.70	80(OPEN)		Ø9.02*8.70	11.10	4.39	VS	11.22
110W(CLOSE)		Ø4.37*11.10	110(OPEN)		Ø9.02*11.10				

MODEL NO.	VOLTAGE	LUMEN	WEIGHT (1kg=2.2lbs)	EQUAL TO	CERTIFICATE
GKS35-80W-10	100-277VAC 50/60Hz	9600±200lm	NW 2.69lbs GW 3.37lbs	250W HPS MHL HID	CE/ROHS/DLC4.4 cUL/UL/LM79/Tm21
GKS35-110W-10	100-277VAC 50/60Hz	13200±200lm	NW 3.57lbs GW 4.32lbs	400W HPS MHL HID	CE/ROHS/DLC4.4 cUL/UL/LM79/Tm21



# LED AREA LIGHT

## GKS35

80W 110W





US9951931B1  
CN2016210663975  
CN2016304758009



### HORIZONTAL LIGHTING

**GKS35**




### ADVANTAGES

-  Patent design, foldable fin type heat sink for a better heat dissipation
-  Suitable for enclosed fixture
-  Working temperature: -40°F~140°F(-40°C~60°C)  
50,000hours reliable lifespan
-  High light efficiency SAMSUNG 2835 150Lm/W
-  6KV Surge protection
-  5 years warranty
-  Top quality driver components:
  - ① ST MOS (Italy & France)
  - ② INFINEON IC chip (Germany)
  - ③ Rubycon capacitor (Japan)
  - ④ PANJIT Diodes (Taiwan)


### DIMENSIONS

DxL(unit:inch inch x25.4=mm)

WATT	BASE	E39	WATT	BASE	E39
80W(CLOSE)		Ø4.37*8.70	80(OPEN)		Ø9.02*8.70
110W(CLOSE)		Ø4.37*11.10	110(OPEN)		Ø9.02*11.10

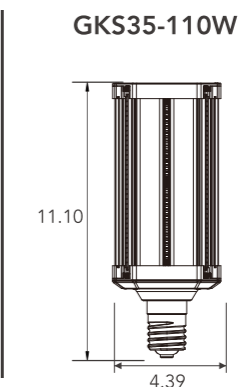

VS

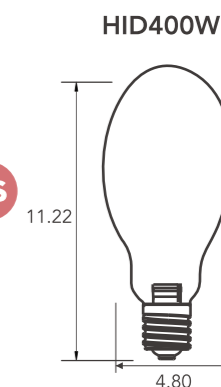

### APPLICATIONS


MODEL NO.	VOLTAGE	LUMEN	WEIGHT (1kg=2.2lbs)	EQUAL TO	CERTIFICATE
GKS35-80W	100-277VAC 50/60Hz	12000±200lm	NW 2.69lbs GW 3.37lbs	250W HPS MHL HID	CE/ROHS/DLC4.4 cUL/UL/LM79/Tm21
GKS35-110W	100-277VAC 50/60Hz	16500±200lm	NW 3.57lbs GW 4.32lbs	400W HPS MHL HID	CE/ROHS/DLC4.4 cUL/UL/LM79/Tm21



## LED AREA LIGHT

# GKS37

27W 45W 63W

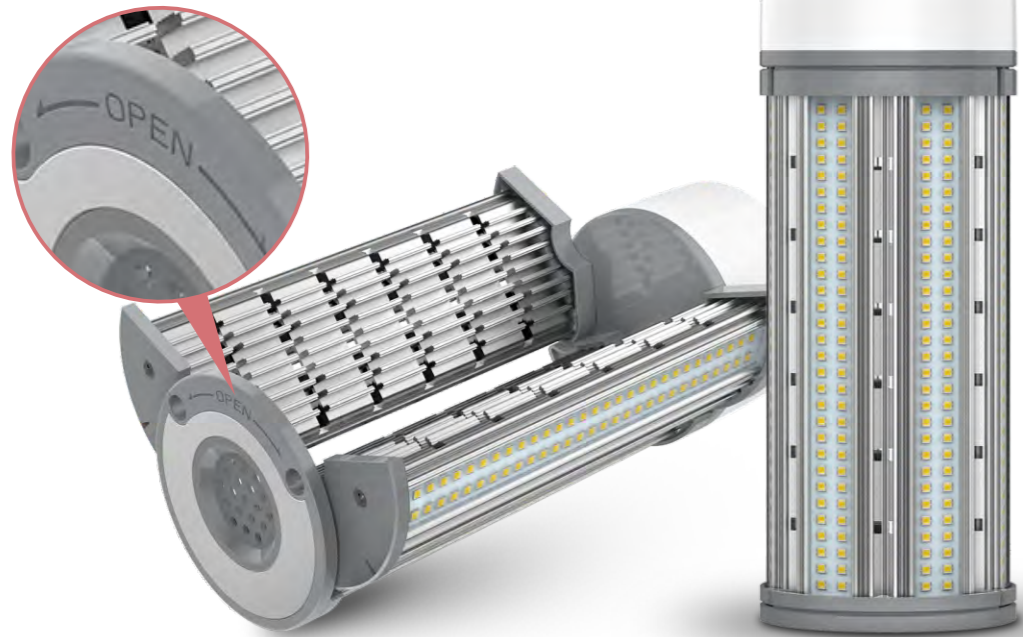








US9951939B1  
CN2017205043801




## HORIZONTAL LIGHTING


# GKS37

### ADVANTAGES

-  Patent design, foldable fin type heat sink for a better heat dissipation
-  Suitable for enclosed fixture
-  Working temperature: -40°F~140°F(-40°C~60°C) 50,000hours reliable lifespan
-  High light efficiency SAMSUNG 2835 150Lm/W
-  27W 45W > 4kv; 63W >6kv high surge protection
-  5 years warranty
-  Top quality driver components:
  - ① ST MOS (Italy & France)
  - ② INFINEON IC chip (Germany)
  - ③ Rubycon capacitor (Japan)
  - ④ PANJIT Diodes (Taiwan)

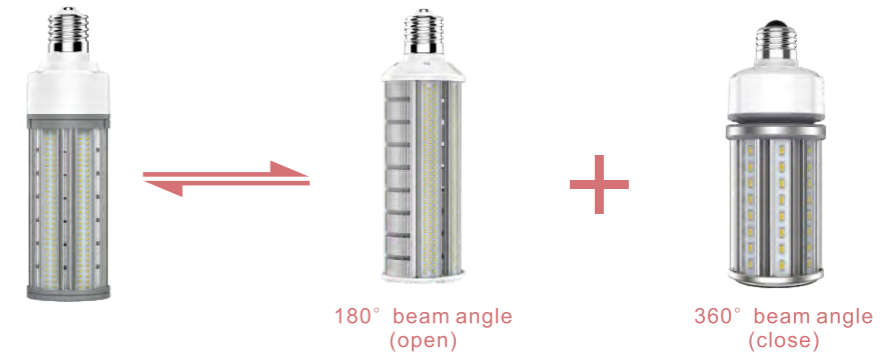

### APPLICATIONS



BASE	WATT	27W	45W	63W
E26		∅3.23*8.03	∅3.23*9.25	∅3.23*10.63
E27		∅3.23*8.15	∅3.23*9.37	∅3.23*10.35
E39		∅3.23*8.70	∅3.23*9.92	∅3.23*11.30
E40		∅3.23*8.86	∅3.23*10.08	∅3.23*11.46

DxL(unit:inch inch x25.4=mm)

MODEL NO.	VOLTAGE	LUMEN	WEIGHT (1kg=2.2lbs)	EQUAL TO	CERTIFICATE
GKS37-27W	100-277VAC 50/60Hz	4050±200lm	NW 1.50lbs GW 1.94lbs	125W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS37-45W	100-277VAC 50/60Hz	6750±200lm	NW 1.67lbs GW 2.11lbs	200W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS37-63W	100-277VAC 50/60Hz	9450±200lm	NW 2.16lbs GW 2.60lbs	285W HPS MHL HID	LM80 DLC cUL/UL LM79



## LED AREA LIGHT

# GKS38

20W 30W 40W 60W



US2019003697A1  
CN2017207776262




## HORIZONTAL LIGHTING

# GKS38


### ADVANTAGES

-  350° rotatable lamp base, lighting direction adjustable
-  Lighting without dark area
-  Working temperature: -40°F~140°F(-40°C~60°C)  
50,000hours reliable lifespan
-  High light efficiency SAMSUNG 2835 150Lm/W
-  S38 20W 40W > 4kv; 60W >6kv high surge protection
-  5 years warranty
-  Top quality driver components:  
① FIRST MOS(USA)      ② MPS IC Chip (USA)  
③ Rubycon capacitor (Japan)      ④ Galaxy Diodes (biggest in China)

### INTELLIGENT COOLING

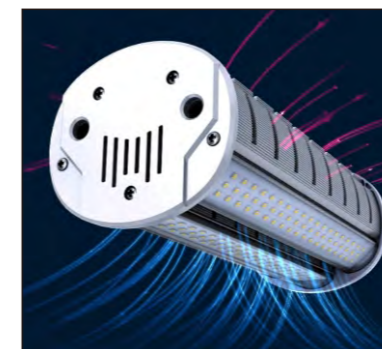

### APPLICATIONS

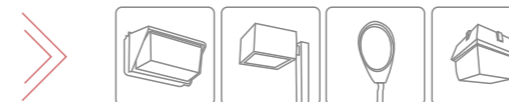

BASE	20W	30W	40W	60W
E26	Ø3.62*5.16	Ø3.62*7.01	Ø3.62*7.80	Ø3.62*9.96
E27	Ø3.62*5.28	Ø3.62*7.17	Ø3.62*7.95	Ø3.62*10.08
E39	Ø3.62*5.83	Ø3.62*7.60	Ø3.62*8.46	Ø3.62*10.71
Ex39	Ø3.62*5.83	Ø3.62*7.64	Ø3.62*8.47	Ø3.62*10.71
E40	Ø3.62*5.94	Ø3.62*7.80	Ø3.62*8.58	Ø3.62*10.83

DxL(unit:inch inch x25.4=mm)

MODEL NO.	VOLTAGE	LUMEN	WEIGHT (1kg=2.2lbs)	EQUAL TO	CERTIFICATE
GKS38-20W	100-277VAC 50/60Hz	3000±200lm	NW 1.02lbs GW 1.28lbs	100W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS38-30W	100-277VAC 50/60Hz	4500±200lm	NW 1.47lbs GW 1.78lbs	125W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS38-40W	100-277VAC 50/60Hz	6000±200lm	NW 1.68lbs GW 1.98lbs	200W HPS MHL HID	LM80 DLC cUL/UL LM79
GKS38-60W	100-277VAC 50/60Hz	9000±200lm	NW 2.25lbs GW 2.60lbs	250W HPS MHL HID	LM80 DLC cUL/UL LM79