

Future LED Co., Ltd.



Professional Water Fountain Supplier

Company Introduction **Product Description** **Future Prospects**

Sales Dept.
2021

Contact : 089 - 006 0906 Email: info@7-mars.com Website: 7-mars.com

Company Introduction

Our company is established in 2010, during the hard effort of these years, we've established long-term cooperation with many clients in domestic and overseas market and get the good reputation.

We mainly supply fountain equipment, such as:

1. **Programmable Fountain Head:** Air Explosion Fountain, One(Two Or Three) Axis Dancing Fountain, Flame with Water Fountain, Lotus Fountain, Fire Fountain, Water Movie, Firework Fountain, Laminar or Jumping Fountain, and so on.
2. **Classic and Ordinary Fountain Nozzle:** Bubbling Fountain, Jade Morning Glory Fountain, Flower Fountain, Mushroom Fountain, Jade Column Fountain, and so on.
3. **Fountain Pump:** There are many AC/DC type submersible water pumps for your choice.
4. **Fountain Valve:** Solenoid Valve and Ball Valve.
5. **Fountain/Ground/Pool Lamp:** there are many types for your choice too.
6. **Reduction Gear** for Swing Fountain, **Waterproof Cable** and other fountain equipment.

Besides the fountain equipment above, we can also offer fountain project design, construction and installation service.

We always persist in professional, responsible and reliable working style, and we're looking forward to establish the long term and mutually beneficial cooperation with you.





1. Programmable Fountain Head --- Foreword

1. For Fountain Equipment

If you just need the equipment, we need the following details:

1. Tell us which model number, the quantity, the lamp type you need for the product.
2. For some equipment, like driver board or underwater lamp, the input voltage is AC/DC24V, if you don't have the voltage transformer adapter, please do tell us.
3. If you don't know how to connect them all, we can offer wire diagram to help you.
4. If you don't know how to build the electricity control cabinet, we can also help.

2. For Fountain Design

If you need our design service, we need the following details:

1. Tell us the dimension of the fountain area. Better offer us the CAD drawing for the fountain.
2. Tell us the water depth of the water reservoir, because some equipment need to be welded on the holder.
3. Tell us the water cable length from the power supply to the nearest part of the fountain, better marked on CAD.
4. Tell us the voltage you can get, for example AC380V, 50Hz.

3. For Installation Service

If you need our installation, we need the following details:

1. We need your help to pay the labor cost, about 150 USD each day, for each people.
2. You need to arrange the eating, home and boarding for our employee.
3. We need your help to pay the insurance and the round-trip air ticket.

Product Description



1. Programmable Fountain Head --- Laminar Fountain Head

Laminar Fountain Head

Laminar fountain nozzles work by straightening turbulent water molecules, thus improving transparency of the water jet. It's achieved by reducing the water's velocity while straightening the flow at the same time to give it the smooth laminar appearance.



| Product Photo | Size | Small | Medium | Large | Extra large |
|-------------------------------|-------------------------|-------------|-------------|-------------|-------------|
| (Stainless Steel 304/316) | Model Number | EFBGQ-20-10 | EFBGQ-40-16 | EFBGQ-40-18 | EFBGQ-40-18 |
| | Product Size(mm) | 250*168*168 | 400*219*219 | 400*273*273 | 470*323*323 |
| | Outlet(mm) | 10 | 16 | 18 | 18 |
| | Connection Size | DN20 (3/4") | DN40 (1.5") | DN40 (1.5") | DN40 (1.5") |
| | Flow(M ³ /H) | 2 | 4 | 5 | 6 |
| | Lift(M) | 4 | 10 | 12 | 13 |
| | Net Weight(Kg) | 5 | 12 | 18 | 28 |
| | Volume(M ³) | 0.014 | 0.04 | 0.05 | 0.08 |
| | Water Coverage(M) | 1.5 | 3 | 4 | 5 |
| Spray Height(M) | 1.5 | 2 | 2.8 | 3 | |

Underwater Lamp for Your Choice

| Product Photo | Type of Lamp | Color | Cable | Voltage | Power |
|-------------------------------|--------------|---|------------------|-----------|-------|
| (Stainless Steel 304/316) | Single Color | Red, Blue, Blue, Yellow, Purple, Warm White, Pure White or Others | 2-Core, 2*0.75 | AC/DC 24V | 1 W |
| | Single Color | Red, Blue, Blue, Yellow, Purple, Warm White, Pure White or Others | 2-Core, 2*0.75 | AC/DC 24V | 3 W |
| | RGB | RGB, Internal Control Color Change | 2-Core, 3*0.75 | AC 12/24V | 3 W |
| | RGB | RGB, External Control Color Change | 2-Core, 4*0.75 | AC 12/24V | 3 W |
| | RGB | RGB, Internal Control Color Change | 2-Core, 2*0.75 | AC 12V | 9 W |
| | RGB | RGB, External Control Color Change | 4-Core, 4*0.75 | AC 12/24V | 9 W |
| | DMX512 | DMX512 RGB | 3-Core*2, 3*0.75 | DC 12/24V | 3 W |
| | DMX512 | DMX512 RGB | 3-Core*2, 3*0.75 | DC 12/24V | 9 W |

Product Description

1. Programmable Fountain Head --- Underwater Laminar Fountain Head

Underwater Laminar Fountain Head

Laminar fountain nozzles work by straightening turbulent water molecules, thus improving transparency of the water jet.

It's achieved by reducing the water's velocity while straightening the flow at the same time to give it the smooth laminar appearance.



Product Photo
(Stainless Steel 304/316)



| Size | Small | Medium | Large | Extra large |
|-------------------------|--------------|--------------|--------------|--------------|
| Model Number | EFBGQ1-20-10 | EFBGQ1-40-16 | EFBGQ1-40-18 | EFBGQ1-40-18 |
| Product Size(mm) | 272*168*168 | 422*219*219 | 422*273*273 | 492*323*323 |
| Outlet(mm) | 10 | 16 | 18 | 18 |
| Connection Size | DN20 (3/4") | DN40 (1.5") | DN40 (1.5") | DN40 (1.5") |
| Flow(M ³ /H) | 2 | 4 | 5 | 6 |
| Lift(M) | 4 | 10 | 12 | 13 |
| Net Weight(Kg) | 6 | 13 | 19 | 29 |
| Volume(M ³) | 0.014 | 0.04 | 0.05 | 0.08 |
| Water Coverage(M) | 1.5 | 3 | 4 | 5 |
| Spray Height(M) | 1.5 | 2 | 2.8 | 3 |

Underwater Lamp for Your Choice

| Product Photo | Type of Lamp | Color | Cable | Voltage | Power |
|---------------|--------------|---|------------------|-----------|-------|
| | Single Color | Red, Blue, Blue, Yellow, Purple, Warm White, Pure White or Others | 2-Core, 2*0.75 | AC/DC 24V | 1 W |
| | Single Color | Red, Blue, Blue, Yellow, Purple, Warm White, Pure White or Others | 2-Core, 2*0.75 | AC/DC 24V | 3 W |
| | RGB | RGB, Internal Control Color Change | 2-Core, 3*0.75 | AC 12/24V | 3 W |
| | RGB | RGB, External Control Color Change | 2-Core, 4*0.75 | AC 12/24V | 3 W |
| | RGB | RGB, Internal Control Color Change | 2-Core, 2*0.75 | AC 12V | 9 W |
| | RGB | RGB, External Control Color Change | 4-Core, 4*0.75 | AC 12/24V | 9 W |
| | DMX512 | DMX512 RGB | 3-Core*2, 3*0.75 | DC 12/24V | 3 W |
| | DMX512 | DMX512 RGB | 3-Core*2, 3*0.75 | DC 12/24V | 9 W |


Product Description

1. Programmable Fountain Head --- Jumping Jet Fountain Head

Jumping/Leaping Fountain Head

Jumping fountain nozzles work by straightening turbulent water molecules, thus improving transparency of the water jet.

When the water cutter works, the water column is divided into several pieces, and because of the transparent water, the light color can be well reflected.



Product Photo
(Stainless Steel 304/316)



(Driver Board for water cutter is offered free)



| Size | Small | Medium | Large | Extra large |
|-------------------------|-------------|-------------|-------------|-------------|
| Model Number | EFTQ-20-10 | EFTQ-40-16 | EFTQ-40-18 | EFTQ-40-18 |
| Product Size(mm) | 200*200*420 | 260*260*600 | 300*300*600 | 350*350*670 |
| Outlet(mm) | 10 | 16 | 18 | 18 |
| Connection Size | DN20 (3/4") | DN40 (1.5") | DN40 (1.5") | DN40 (1.5") |
| Flow(M ³ /H) | 2 | 4 | 5 | 6 |
| Lift(M) | 4 | 10 | 12 | 13 |
| Net Weight(Kg) | 10 | 15 | 25 | 34 |
| Volume(M ³) | 0.022 | 0.054 | 0.08 | 0.1 |
| Water Coverage(M) | 1.5 | 3 | 4 | 5 |
| Spray Height(M) | 1.5 | 2 | 2.8 | 3 |

Underwater Lamp for Your Choice

| Product Photo | Type of Lamp | Color | Cable | Voltage | Power |
|---------------|--------------|---|------------------|-----------|-------|
| | Single Color | Red, Blue, Blue, Yellow, Purple, Warm White, Pure White or Others | 2-Core, 2*0.75 | AC/DC 24V | 1 W |
| | Single Color | Red, Blue, Blue, Yellow, Purple, Warm White, Pure White or Others | 2-Core, 2*0.75 | AC/DC 24V | 3 W |
| | RGB | RGB, Internal Control Color Change | 2-Core, 3*0.75 | AC 12/24V | 3 W |
| | RGB | RGB, External Control Color Change | 2-Core, 4*0.75 | AC 12/24V | 3 W |
| | RGB | RGB, Internal Control Color Change | 2-Core, 2*0.75 | AC 12V | 9 W |
| | RGB | RGB, External Control Color Change | 4-Core, 4*0.75 | AC 12/24V | 9 W |
| | DMX512 | DMX512 RGB | 3-Core*2, 3*0.75 | DC 12/24V | 3 W |
| | DMX512 | DMX512 RGB | 3-Core*2, 3*0.75 | DC 12/24V | 9 W |

Product Description

1. Programmable Fountain Head --- One Axis Dancing Fountain Head

One Axis Dancing Fountain Head

It's a basic fountain for a big project. The stepper motor can make the nozzle achieve 360° rotation.

You can program the driver board to achieve dancing, swing or up-straight effect.



Product Photo

Model Number

EF1D-40

EF1D-50

(Stainless Steel 304/316)

Product Size(mm)

300*210*150

330*240*160

Net Weight(Kg)

10

13

Reduction Gear Ratio
(Worm and Gear)

1:10

1:10

Stepper Motor Phase

Two Phase

Two Phase

Stepper Motor Voltage

AC 60-80V

AC 60-80V

Driver Board Parameter Setting

Current: 4.8A
Subdivision: 800

Current: 4.8A
Subdivision: 800

Stepper Motor Power(W)

300

300

Stepper Motor Maximum Torque(N.M)

6

8.5

Sensor Input Voltage(V)

24

24

Maximum Spray Height(m)

12

18

Maximum Rotate Speed
(Round Per Minute)

60

60

Stepper Motor Underwater Cable

JHS4*2.5

JHS4*2.5

Sensor Shielding Underwater Cable

JHSP3*1

JHSP3*1



(Driver Board Offered Free)



Product Description

1. Programmable Fountain Head --- One Axis Dancing Fountain Head-Type A and Type B

One Axis Dancing Fountain Head-Type A and Type B

It's a basic fountain for a big project. The stepper motor can make the nozzle achieve 360° rotation. There is a dual-structure component, so you can program the driver board to achieve 2 water types just working on one nozzle.



Product Photo

(Stainless Steel 304/316)



Type A

Type B

(Driver Board Offered Free)



| | |
|--|-----------------------------------|
| Model Number | EF1D-40-2 |
| Product Size(mm) | 370*330*220 |
| Net Weight(Kg) | 15 |
| Reduction Gear Ratio (Worm and Gear) | 1:10 |
| Stepper Motor Phase | Two Phase |
| Stepper Motor Voltage | AC 60-80V |
| Driver Board Parameter Setting | Current: 4.8A Subdivision: 800 |
| Stepper Motor Power(W) | 300 |
| Stepper Motor Maximum Torque(N.M) | 8.5 |
| Sensor Input Voltage(V) | 24 |
| Maximum Spray Height(m) | 18 |
| Maximum Rotate Speed (Round Per Minute) | 60 |
| Stepper Motor Underwater Cable | JHS4*2.5 |
| Sensor Shielding Underwater Cable | JHSP3*1 |

Product Description

1. Programmable Fountain Head --- One Axis Dancing Fountain Head-Type C

One Axis Dancing Fountain Head-Type C

It's a basic fountain for a big project. The stepper motor can make the nozzle achieve 360° rotation. There is a triple-structure component, so you can program the driver board to achieve 3 types just working on one nozzle.



Product Photo

(Stainless Steel 304/316)



(Driver Board Offered Free)



| | |
|--|-----------------------------------|
| Model Number | EF1D-40-2 |
| Product Size(mm) | 370*330*220 |
| Net Weight(Kg) | 15 |
| Reduction Gear Ratio (Worm and Gear) | 1:10 |
| Stepper Motor Phase | Two Phase |
| Stepper Motor Voltage | AC 60-80V |
| Driver Board Parameter Setting | Current: 4.8A Subdivision: 800 |
| Stepper Motor Power(W) | 300 |
| Stepper Motor Maximum Torque(N.M) | 8.5 |
| Sensor Input Voltage(V) | 24 |
| Maximum Spray Height(m) | 18 |
| Maximum Rotate Speed (Round Per Minute) | 60 |
| Stepper Motor Underwater Cable | JHS4*2.5 |
| Sensor Shielding Underwater Cable | JHSP3*1 |

Product Description

1. Programmable Fountain Head --- Two Axis Dancing Fountain Head

Two Axis Dancing Fountain Head

It's a basic fountain for a big project. Both of two stepper motors can make the nozzle achieve 360° rotation. You can program the driver board to achieve dancing, swing or vertical effect.



EF2D-50

Product Photo

Model Number

Upper Motor

Lower Motor

(Stainless Steel 304/316)

Product Size(mm)

370*340*800

Net Weight(Kg)

45

Reduction Gear Ratio
(Worm and Gear)

1:10

1:10

Stepper Motor Phase

Two Phase

Two Phase

Stepper Motor Voltage

AC 60-80V

AC 60-80V

Driver Board Parameter Setting

Current: 4.8A
Subdivision: 800

Current: 6.0A
Subdivision: 800

Stepper Motor Power(W)

300

350

Stepper Motor Maximum Torque(N.M)

8.5

12

Sensor Input Voltage(V)

24

24

Maximum Spray Height(m)

15

Maximum Rotate Speed
(Round Per Minute)

60

40

Stepper Motor Underwater Cable

JHS4*2.5*2

Sensor Shielding Underwater Cable

JHSP3*1*2



(Driver Board Offered Free)




Product Description

1. Programmable Fountain Head --- Two Axis Dancing Fountain Head-Type A (Short Type)

Two Axis Dancing Fountain Head-Type A (Short Type)

It's a basic fountain for a big project. Both of two stepper motors can make the nozzle achieve 360° rotation. You can program the driver board to achieve dancing, swing or vertical effect.



| Product Photo | Model Number | EF2D-50 | |
|--|---|-----------------------------------|-----------------------------------|
| | | Upper Motor | Lower Motor |
| <p>(Stainless Steel 304/316)</p>  <p>(Driver Board Offered Free)</p>  | Product Size(mm) | 370*340*770 | |
| | Net Weight(Kg) | 40 | |
| | Reduction Gear Ratio (Worm and Gear) | 1:10 | 1:10 |
| | Stepper Motor Phase | Two Phase | Two Phase |
| | Stepper Motor Voltage | AC 60-80V | AC 60-80V |
| | Driver Board Parameter Setting | Current: 4.8A Subdivision: 800 | Current: 6.0A Subdivision: 800 |
| | Stepper Motor Power(W) | 300 | 350 |
| | Stepper Motor Maximum Torque(N.M) | 8.5 | 12 |
| | Sensor Input Voltage(V) | 24 | 24 |
| | Maximum Spray Height(m) | 15 | |
| | Maximum Rotate Speed (Round Per Minute) | 60 | 40 |
| | Stepper Motor Underwater Cable | JHS4*2.5*2 | |
| | Sensor Shielding Underwater Cable | JHSP3*1*2 | |

Product Description



1. Programmable Fountain Head --- Two Axis Dancing Fountain Head-Type B (Horizontal Type)

Two Axis Dancing Fountain Head-Type B (Horizontal Type)

It's a basic fountain for a big project. Both of two stepper motors can achieve 360° rotation. It's horizontally designed to look better underwater, and you can program the driver Board to achieve dancing, swing or vertical effect.



Product Photo

Model Number

EF2D-50SY

Upper Motor

Lower Motor


(Stainless Steel 304/316)

Product Size(mm)

800*400*660

Net Weight(Kg)

45



Reduction Gear Ratio
(Worm and Gear)

1:10

1:10

Stepper Motor Phase

Two Phase

Two Phase

Stepper Motor Voltage

AC 60-80V

AC 60-80V

Driver Board Parameter Setting

Current: 4.8A
Subdivision: 800

Current: 6.0A
Subdivision: 800

Stepper Motor Power(W)

300

350

(Driver Board Offered Free)

Stepper Motor Maximum Torque(N.M)

8.5

12

Sensor Input Voltage(V)

24

24

Maximum Spray Height(m)

15

Maximum Rotate Speed
(Round Per Minute)

60

40



Stepper Motor Underwater Cable

JHS4*2.5*2

Sensor Shielding Underwater Cable

JHSP3*1*2

Product Description

1. Programmable Fountain Head --- Two Axis Dancing Fountain Head-Type C (Three Mode)

Two Axis Dancing Fountain Head-Type C (Three Mode)

It's a basic fountain for a big project. Both of two stepper motors can achieve 360° rotation. There is a triple-structure on the nozzle, and you can program the driver board to achieve dancing, swing or vertical effect.



Product Photo

Model Number

EF2D-50SY

Upper Motor

Lower Motor

(Stainless Steel 304/316)

Product Size(mm)

400*370*870

Net Weight(Kg)

48



Reduction Gear Ratio
(Worm and Gear)

1:10

1:10

Stepper Motor Phase

Two Phase

Two Phase

Stepper Motor Voltage

AC 60-80V

AC 60-80V

Driver Board Parameter Setting

Current: 4.8A
Subdivision: 800

Current: 6.0A
Subdivision: 800

Stepper Motor Power(W)

300

350

Stepper Motor Maximum Torque(N.M)

8.5

12

Sensor Input Voltage(V)

24

24

(Driver Board Offered Free)

Maximum Spray Height(m)

15

Maximum Rotate Speed
(Round Per Minute)

60

40

Stepper Motor Underwater Cable

JHS4*2.5*2

Sensor Shielding Underwater Cable

JHSP3*1*2



Product Description

1. Programmable Fountain Head --- Changeable Lotus Flower Fountain Head

Changeable Lotus Flower Fountain Head

There are two nozzles on the top, one sprays a trumpet flower shape, another one displays a up-straight water column. All process is smooth and they both make gradual and natural change.



Product Photo

Model Number

EF2610

EF2611

EF2612

EF2613

(Stainless Steel 304/316)

Connection Size

DN40

DN50

DN60

DN150

Product Size(mm)

Working Pressure(Kpa)

20-200

50-300

Water Flow(M³/H)

30

35

Spray Height(m)

3.2

3.5

Spray Diameter(m)

2.5

3

Net Weight(Kg)

5.1

5.4



Product Description

1. Programmable Fountain Head --- Water Screen/Movie Fountain Head

Water Screen/Movie Fountain Head

It's used to generate a screen for water movie fountain. The radius of water screen is from 10-20 meter, you can design the video, and project it to the water screen.



Product Photo

Model Number

EFSM-01

EFSM-02

EFSM-03

EFSM-04

(Stainless Steel 304/316)

Connection Size(mm)

DN80

DN100

DN125

DN150

Product Size (mm)

Φ255*180

Φ305*200

Net Weight (Kg)

18

30

Scattering Angle

165°

165°

165°

165°

Scattering Radius (m)

15

20



Product Description



1. Programmable Fountain Head --- Fire Fountain Head(Oil as Fuel)

Fire Fountain Head(Oil as Fuel)

It's a basic fountain for a big project, when it works at night, it can create a magic and charming atmosphere.

You can program the fountain to display the effect, such as jumping or running.



Product Photo

Model Number

EFHP-01

(Stainless Steel 304/316)

Product Size(mm)

600*300*750 mm

Net Weight(Kg)

28 Kg

Voltage(V)

220 V

Current(A)

2.5 A

Power (W)

550 W

Maximun Spray Height (m)

10 m

Fire Nozzle Outlet (mm)

2.5 mm

Pipeline Material

Stainless Steel 304, 316

Pipeline Size

Depending on circumstances

Fuel

Biological Alcohol Oil (Isoparaffin)

Classification of wind resistance

3



Product Description

1. Programmable Fountain Head --- Fire Fountain Head(LPG,LNG as Fuel)

Fire Fountain Head(LPG,LNG as Fuel)

It's a basic fountain for a big project, when it works at night, it can create a magic and charming atmosphere.

You can program the fountain to display the effect, such as jumping or running.



Product Photo

Model Number

EFHP-02

(Stainless Steel 304/316)

Product Size(mm)

500*200*800 mm

Net Weight(Kg)

16.6 Kg

Voltage(V)

220 V

Current(A)

2.5 A

Power (W)

550 W

Maximun Spray Height (m)

3 m

Fire Nozzle Outlet (mm)

8 mm

Pipeline Material

Stainless Steel 304, 316

Pipeline Size

Depending on circumstances

Fuel

LPG, LNG

Classification of wind resistance

3



Product Description

1. Programmable Fountain Head --- Fire with Water Fountain Head(LPG,LNG as Fuel)

Fire with Water Fountain Head(LPG,LNG as Fuel)

It's a basic fountain for a big project, fire is pushed by water and spray together, thus create a magic and charming atmosphere. You can program the fountain to adjust the duration of fire and water.



Product Photo

Model Number

EFHP-03

Product Size(mm)

920*325*900 mm

Net Weight(Kg)

32 Kg

Ignition Coil Voltage(V)

220 V

Ignition Coil Current(A)

1.4 A

Ignition Coil Power (W)

300 W

Gas Supply Solenoid Valve Voltage(V)

220 V

Gas Supply Solenoid Valve Current(A)

0.2 A

Gas Supply Solenoid Valve Power (W)

50 W

Maximun Spray Height (m)

6 m

Pipeline Material

Stainless Steel 304, 316

Pipeline Size

Depending on circumstances

Fuel

LPG, LNG

Classification of wind resistance

2



(Stainless Steel 304/316)

Product Description



1. Programmable Fountain Head --- Air Film Fountain Head

Air Film Fountain Head

This fountain is adopted in water pond, floating fountain and some large project. You can watch the video to see the fountain effect.



Product Photo

Size

Small

Large

Product Dimension(mm)

450*680*1150

500*720*1450

Net Weight(Kg)

39

50

Outlet (mm)

DN133

DN159

Air Inlet (mm)

DN25

DN25

Gasholder Pressure (Mpa)

0.8

0.8

Discharge Pressure (Mpa)

0.1-0.3

0.1-0.3

(Stainless Steel 304/316)

Area of Effect

$\Phi 4 \pm 1m$

$\Phi 7 \pm 1m$



Product Description




1. Programmable Fountain Head --- Air Explosion Fountain Head

Air Explosion Fountain Head

It's a basic fountain for a big floating fountain or any other large music fountain.

When the solenoid valve is opened, the water is pushed by the air and spray up, the sound is like a firework.

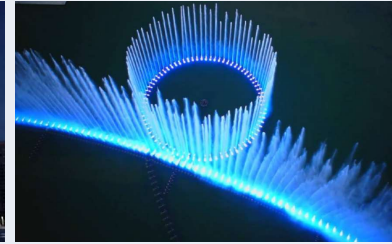

Product Photo

Model Number

EFPG-15

EFPG-25

EFPG-35

EFPG-45

EFPG-55

EFPG-70

Product Dimension(mm)

680*325*630

680*330*830

750*370*1280

760*385*1280

980*385*1480

1410*720*1480

Solenoid Valve Voltage(V)

AC 220V

Solenoid Valve(W)

14W

Working Pressure(Mpa)

0.6

0.8

0.8

0.8

1

1.2

Net Weight(Kg)

38

40

56

60

92

243

Water Outlet(mm)

31

47

Inlet(mm)

DN15

DN25

Cable for Solenoid Valve

JHS 2*1.5

Maximum Spray Height(m)

15

25

35

45

55

70



(Stainless Steel 304/316)



2. Classic and Ordinary Fountain Nozzle --- Foreword

1. For Fountain Equipment

If you just need the equipment, we need the following details:

1. Tell us which model number, the quantity, the material(brass or stainless steel) you need for the product.
2. If you don't know how to connect them all, we can offer wire diagram to help you.
3. If you don't know how to build the electricity control cabinet, we can also help.

2. For Fountain Design

If you need our design service, we need the following details:

1. Tell us the dimension of the fountain area. Better offer us the CAD drawing for the fountain.
2. Tell us the water depth of the water reservoir, because some equipment need to be welded on the holder.
3. Tell us the water cable length from the power supply to the nearest part of the fountain, better marked on CAD.
4. Tell us the voltage you can get, for example AC380V, 50Hz.

3. For Installation Service

If you need our Installation, we need the following details:


1. We need your help to pay the labor cost, about 150 USD each day, for each people.
2. You need to arrange the eating, home and boarding for our employee.
3. We need your help to pay the insurance and the round-trip air ticket.


Product Description




2. Classic and Ordinary Fountain Nozzle --- Brass Chrome-plated Material – Direct Spray Fountain Nozzle


Universal Direct Spray Fountain Nozzle
You can adjust the direction/angle before the water spray out, and this fountain nozzle is very multi-functional.




| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
|  (Chromium-plated Brass) | EFZW-A-1 | 0.5" / DN15 | 15-65 | 0.3-1.5 | 1.0-4.0 | Radial | 50 |
| | EFZW-A-2 | 0.75" / DN20 | 15-80 | 1.0-3.0 | 1.0-5.0 | Radial | 87 |
| | EFZW-A-3 | 1.0" / DN25 | 50-100 | 2.0-4.0 | 3.0-6.0 | Radial | 148 |
| | EFZW-A-4 | 1.26" / DN32 | 50-150 | 3.0-6.0 | 3.0-7.0 | Radial | 402 |
| | EFZW-A-5 | 1.5" / DN40 | 50-150 | 3.0-6.0 | 3.0-7.0 | Radial | 404 |
| | EFZW-A-6 | 2.0" / DN50 | 50-200 | 5.0-8.0 | 3.0-8.0 | Radial | 735 |
| | EFZW-A-7 | 2.5" / DN65 | 70-250 | 10.0-25.0 | 3.5-15.0 | Radial | 2200 |
| | EFZW-A-8 | 3.0" / DN80 | 70-330 | 10.0-40.0 | 3.5-20.0 | Radial | 3100 |
| | EFZW-A-9 | 4.0" / DN100 | 80-400 | 10.0-60.0 | 3.5-25.0 | Radial | 3800 |


Adjustable Fountain Nozzle with Valve(Internal/Female Thread)
You can adjust the direction and the valve to control the waterflow.

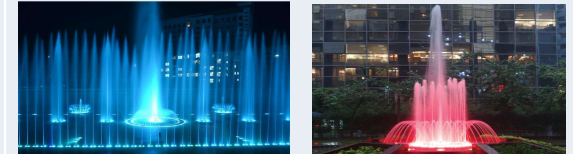


| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
|  (Chromium-plated Brass) | EFZW-B-1 | 0.5" / DN15 | 15-65 | 0.3-1.5 | 1.0-4.0 | Radial | 107 |
| | EFZW-B-2 | 0.75" / DN20 | 15-80 | 1.0-3.0 | 1.0-5.0 | Radial | 192 |
| | EFZW-B-3 | 1.0" / DN25 | 50-100 | 2.0-4.0 | 3.0-6.0 | Radial | 293 |
| | EFZW-B-4 | 1.5" / DN40 | 50-150 | 3.0-6.0 | 3.0-7.0 | Radial | 851 |
| | EFZW-B-5 | 2.0" / DN50 | 50-200 | 5.0-8.0 | 3.0-8.0 | Radial | 1441 |


Adjustable Hexagon Fountain Nozzle
You can adjust the direction/angle before the water spray out.



| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
|  (Chromium-plated Brass) | EFZW-C-1 | 1/8" / DN3 | | | | Radial | 21 |
| | EFZW-C-2 | 1/4" / DN6 | | | | Radial | 25 |
| | EFZW-C-3 | 3/8" / DN9.5 | | | | Radial | 67 |
| | EFZW-C-4 | 1/2" / DN15 | 15-65 | 0.3-1.5 | 1.0-4.0 | Radial | 94 |
| | EFZW-C-5 | 3/4" / DN20 | 15-80 | 1.0-3.0 | 1.0-5.0 | Radial | 140 |
| | EFZW-C-6 | 1.0" / DN25 | 50-100 | 2.0-4.0 | 3.0-6.0 | Radial | 310 |
| | EFZW-C-7 | 1.5" / DN40 | 50-150 | 3.0-6.0 | 3.0-7.0 | Radial | 750 |
| | EFZW-C-8 | 2.0" / DN50 | 50-200 | 5.0-8.0 | 3.0-8.0 | Radial | 1070 |

Dry Fountain Verticle Jet
This kind of fountain nozzle is mainly used in dry land fountain, can be installed in square or hallway.

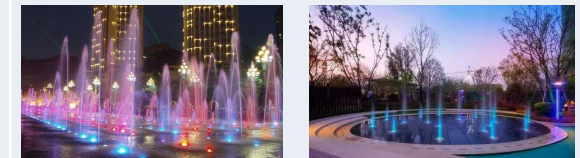

| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
|  (Chromium-plated Brass) | EFZW-E1-1 | 1.0" / DN25 | 50-100 | 2.0-4.0 | 3.0-6.0 | Radial | 630 |

Product Description




2. Classic and Ordinary Fountain Nozzle --- Brass Chrome-plated Material – Direct Spray Fountain Nozzle


Dry Fountain Peacock Tail Nozzle
This kind of fountain nozzle is mainly used in dry land fountain, can be installed in square or hallway.




Product Parameter

| | | | | | | | |
|---|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
| | EFZW-E2-1 | 1.0" / DN25 | 50-100 | 2.0-4.0 | 3.0-6.0 | Radial | 440 |

Dry Fountain Nozzle(Three Water Column)
This kind of fountain nozzle is mainly used in dry land fountain, can be installed in square or hallway.




Product Parameter

| | | | | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
| | EFZW-E3-1 | 1.0" / DN25 | 50-100 | 2.0-4.0 | 3.0-6.0 | Radial | 530 |


Pressing PlatedVerticle Fountain Nozzle
You can adjust the direction/angle before the water spray out.




Product Parameter

| | | | | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
| | EFZW-F-1 | 3/4" / DN20 | 15-80 | 1.0-3.0 | 1.0-5.0 | Radial | 400 |
| | EFZW-F-2 | 1.0" / DN25 | 50-100 | 2.0-4.0 | 3.0-6.0 | Radial | 583 |
| | EFZW-F-3 | 1.5" / DN40 | 50-150 | 3.0-6.0 | 3.0-7.0 | Radial | 1250 |

Adjustable Fountain Nozzle with Valve(External/Male Thread)
You can adjust the direction and the valve to control the waterflow.

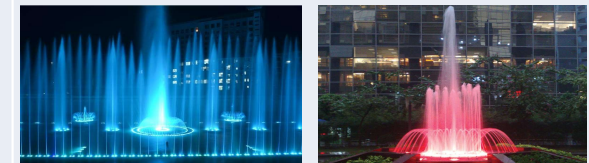

Product Parameter


| | | | | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
| | EFZW-G-1 | 0.5" / DN15 | 15-65 | 0.3-1.5 | 1.0-4.0 | Radial | 110 |
| | EFZW-G-2 | 0.75" / DN20 | 15-80 | 1.0-3.0 | 1.0-5.0 | Radial | 197 |
| | EFZW-G-3 | 1.0" / DN25 | 50-100 | 2.0-4.0 | 3.0-6.0 | Radial | 292 |

Product Description




2. Classic and Ordinary Fountain Nozzle --- Brass Chrome-plated Material – Direct Spray Fountain Nozzle


Little Direct Spray Nozzle
This kind of nozzle is mainly used in water curtain fountain.




Product Parameter

|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Outlet(mm) | Est.Net Weight(g) |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|------------------|-------------------|
| | EFZW-H-1 | M6 | 20-40 | 0.1-0.12 | | 1 | 10 |
| | EFZW-H-2 | M8 | 20-40 | 0.1-0.15 | | 3 | 14 |
| | EFZW-H-3 | M10 | 20-41 | 0.1-0.16 | | 3 | 15 |
| | EFZW-H-4 | M12 | 20-42 | 0.1-0.17 | | 4 | 18 |
| | EFZW-H-5 | 1/4" / DN6.5 | 20-45 | 0.1-0.18 | | 4 | 20 |
| | EFZW-H-6 | 3/8" / DN9.5 | 20-50 | 0.1-0.2 | | / | / |


Little Direct Spray Nozzle, with Valve
This kind of nozzle is mainly used in water curtain fountain.




Product Parameter

|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Outlet(mm) | Est.Net Weight(g) |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|------------------|-------------------|
| | EFZW-J-1 | M10 | 20-40 | 0.1-0.12 | | 4 | 35 |
| | EFZW-J-2 | M12 | 20-40 | 0.1-0.15 | | 4 | 38 |
| | EFZW-J-3 | M14 | 20-41 | 0.1-0.16 | | 5 | 55 |
| | EFZW-J-4 | M16 | 20-42 | 0.1-0.17 | | 4 | / |
| | EFZW-J-5 | 1/4" / DN6.5 | 20-45 | 0.1-0.18 | | 4.5 | 40 |
| | EFZW-J-6 | 3/8" / DN9.5 | 20-50 | 0.1-0.2 | | 5 | 46 |


Hexagon/Sexangle Nozzle
The direction is fixed to display a particular water show, so it's mainly assembled with other fountain equipment.




Product Parameter

|  Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Working Pressure (Kpa) | Flow(m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
|---|--------------|---------------------------|------------------------|-------------------------|-----------------------|-------------------------|---------------|
| | EF-K100 | 0.5" / DN15 | 15-65 | 0.3-1.5 | 1.0-4.0 | Direct Spray | 80 |
| | EF-K101 | 3/4" / DN20 | 15-80 | 1.0-3.0 | 1.0-5.0 | Direct Spray | 135 |
| | EF-K102 | 1.0" / DN25 | 50-100 | 2.0-4.0 | 3.0-6.0 | Direct Spray | 170 |
| | EF-K103 | 1.6" / DN40 | 50-150 | 3.0-6.0 | 3.0-7.0 | Direct Spray | 253 |

Universal Direct Spray Fountain Nozzle(Lenghened Type)
You can adjust the direction/angle before the water spray out, and this fountain nozzle is very multi-functional.



Product Parameter

|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | EFZW-L-1 | 0.5" / DN15 | 15-65 | 0.3-1.5 | 1.0-4.0 | Radial | 67 |
| | EFZW-L-2 | 0.75" / DN20 | 15-80 | 1.0-3.0 | 1.0-5.0 | Radial | 104 |
| | EFZW-L-3 | 1.0" / DN25 | 50-100 | 2.0-4.0 | 3.0-6.0 | Radial | 165 |
| | EFZW-L-4 | 1.26" / DN32 | 50-150 | 3.0-6.0 | 3.0-7.0 | Radial | 419 |
| | EFZW-L-5 | 1.5" / DN40 | 50-150 | 3.0-6.0 | 3.0-7.0 | Radial | 421 |
| | EFZW-L-6 | 2.0" / DN50 | 50-200 | 5.0-8.0 | 3.0-8.0 | Radial | 752 |
| | EFZW-L-7 | 2.5" / DN65 | 70-250 | 10.0-25.0 | 3.5-15.0 | Radial | 2217 |
| | EFZW-L-8 | 3.0" / DN80 | 70-330 | 10.0-40.0 | 3.5-20.0 | Radial | 3117 |
| EFZW-L-9 | 4.0" / DN100 | 80-400 | 10.0-60.0 | 3.5-25.0 | Radial | 3817 | |

Product Description




2. Classic and Ordinary Fountain Nozzle --- Brass Chrome-plated Material – Direct Spray Fountain Nozzle

Middle High Spray Fountain Nozzle
The water spray height can be from 20-120 meters after adjusting, it's a basic fountain for a middle or large size fountain.




Product Parameter


|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Outlet(mm) | Est.Net Weight(g) |
| | EFGB1100 | 2A-100 | 0.33-0.83 | 73-118 | 20-50 | 30 | / |
| | EFGB1101 | 2B-100 | 0.33-1.3 | 105-208 | 20-80 | 38 | / |
| | EFGB1102 | 3A-150 | 0.33-1.35 | 144-290 | 20-80 | 45 | / |
| | EFGB1103 | 3B-150 | 0.33-1.65 | 186-401 | 20-100 | 50 | / |
| | EFGB1104 | 4A-200 | 0.33-2.0 | 291-673 | 20-120 | 63 | / |

Product Description


2. Classic and Ordinary Fountain Nozzle --- Brass Chrome-plated Material -- Scattering Fountain Nozzle


Direct Nozzle
Usually these direct nozzles sprays together and can match well with big fountain project. When it works, the water column is direct and well arranged.



|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| | EF1200 | 1.0" / DN25 | 70 | 21 | 3.5 | 1.3 | 415 |
| | EF1201 | 1.5" / DN40 | 100 | 29 | 6.9 | 2.8 | 1120 |
| | EF1202 | 2.0" / DN50 | 180 | 38 | 7.5 | 3.1 | 1260 |
| | EF1203 | 2.5" / DN65 | 240 | 47 | 10 | 3.3 | 2400 |
| | EF1204 | 3.0" / DN80 | 330 | 58 | 13 | 4 | 2900 |


All Direction Upstraight Spray Fountain Nozzle
The air is sucked when the water sprays out, and there are many bubbles and looks white. It's more elegant at night when there's varied underwater RGB lights.




|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| | EF1210 | 1.0" / DN25 | 30-120 | 8-17 | 1.0-5.0 | 1.2 | 410 |
| | EF1211 | 1.5" / DN40 | 40-140 | 12-24 | 1.5-6.0 | 2.5 | 1315 |
| | EF1212 | 2.0" / DN50 | 60-180 | 15-40 | 2-8 | 3 | 1410 |
| | EF1213 | 2.5" / DN65 | 60-200 | 16-45 | 2-9 | 3.3 | 2300 |


Adjustable 3 Tier /3 Layers Water Fountain Nozzle
Water sprays out from three circle of nozzles, and each nozzle has an adjustable valve to control the water flow. The inner and middle water column and the outer one display a flower type, so we call it three layer flower.



|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| | EF1220 | 1.0" / DN25 | 25-60 | 2.1-4.3 | 1.0-4.0 | 0.8-1.5 | 1515 |
| | EF1221 | 1.5" / DN40 | 25-85 | 5.1-12.7 | 1.0-6.0 | 0.9-2.0 | 1816 |
| | EF1222 | 2.0" / DN50 | 25-115 | 6.9-22 | 1.0-8.0 | 1.2-4.0 | 2250 |

Adjustable 3 Tier /3 Layers Water Fountain Nozzle(Single Layer)
Water sprays out from three circle of nozzles, and each nozzle has an adjustable valve to control the water flow. The inner and middle water column and the outer one display a flower type, so we call it three layer flower.

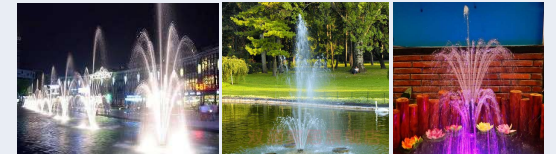


|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| | EF1230 | 1.5" / DN40 | 25-100 | 5-13 | 1-5.5 | 0.8-1.9 | 1800 |
| | EF1231 | 2.0" / DN50 | 25-115 | 6.9-22 | 1.0-7.0 | 1.0-3.0 | 2300 |

Product Description


2. Classic and Ordinary Fountain Nozzle --- Brass Chrome-plated Material – Scattering Fountain Nozzle

Non-adjustable 3 Tier /3 Layers Fountain Nozzle (Single Layer)

Water sprays out from three circle of nozzles, and each nozzle has an adjustable valve to control the water flow. The inner and middle water column and the outer one display a flower type, so we call it three layer flower.




Product Parameter


|  | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|--------------------------|----------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter (m) | Net Weight (g) |
| (Chromium-plated Brass) | EF1220-1 | 1.0" / DN25 | 25-60 | 2.1-4.3 | 1.0-4.0 | 0.8-1.5 | 1505 |
| | EF1221-1 | 1.5" / DN40 | 25-85 | 5.1-12.7 | 1.0-6.0 | 0.9-2.0 | 1806 |
| | EF1222-1 | 2.0" / DN50 | 25-115 | 6.9-22 | 1.0-8.0 | 1.2-4.0 | 2240 |

Flower Water Column Fountain Nozzle

When the water sprays out from the top nozzle and the lower layer nozzles, it looks like a blossoming flower.



Product Parameter


|  | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|---|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| (Chromium-plated Brass) | EF1240 | 1/4" / DN6.7 | 15 | 2 | 0.7 | 1.3 | 64 |
| | EF1241 | 1/2" / DN15 | 35 | 3 | 1.8 | 1.3 | 105 |
| | EF1242 | 3/4" / DN20 | 40 | 5 | 2 | 1.5 | 146 |
| | EF1243 | 1.0" / DN25 | 50 | 7 | 1.5 | 1.6 | 325 |
| | EF1244 | 1.5" / DN40 | 60 | 10 | 1.8 | 1.8 | 415 |
| | EF1245 | 2.0" / DN50 | 80 | 12 | 2 | 2 | 500 |

Firework Fountain Nozzle

It looks like a burning firework when it works. It's easy to install and suitable to be installed on many different kinds of water area.



Product Parameter


|  | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| (Chromium-plated Brass) | EF1250 | 1/4" DN6.66 | 15 | 3 | 0.8 | 1 | 61 |
| | EF1251 | 1/2" / DN15 | 25 | 4 | 1 | 1 | 100 |
| | EF1252 | 3/4" / DN20 | 35 | 5 | 1.2 | 1.2 | 120 |
| | EF1253 | 1.0" / DN25 | 40 | 7 | 1.5 | 1.5 | 270 |
| | EF1254 | 1.5" / DN40 | 60 | 10 | 1.8 | 1.6 | 380 |
| | EF1255 | 2.0" / DN50 | 80 | 12 | 2 | 1.8 | 400 |

Phoenix Tail Fountain Nozzle

There are several small adjustable straight nozzle(with valve) on it. When the water sprays out, it looks like several fingers.



Product Parameter

|  | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|---|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
| (Stainless Steel 304/316) | EF1260 | 1.0" / DN25 | 50-150 | 6.5-13.5 | 2.0-4.0 | 1.5-5.0 | 1300 |
| | EF1261 | 1.5" / DN40 | 50-200 | 7.5-19.5 | 2.0-5.0 | 2.0-6.0 | 1540 |
| | EF1262 | 2.0" / DN50 | 50-250 | 7.5-12.5 | 2.0-6.0 | 2.0-7.0 | 2000 |

Product Description




2. Classic and Ordinary Fountain Nozzle --- Brass Chrome-plated Material – Scattering Fountain Nozzle

Triple Phoenix Tail Fountain Nozzle
There are several small straight nozzle on it. When the water sprays out, these water columns look like several fingers.




Product Parameter

|  | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
| (Chromium-plated Brass) | EF1270 | 1.0" / DN25 | 20-150 | 1.5-2.5 | 1.5-4 | 2.4-3.6 | 1110 |
| | EF1271 | 1.5" / DN40 | 20-180 | 2-3.5 | 1.5-5 | 2.5-3.8 | 1420 |
| | EF1272 | 2.0" / DN50 | 20-220 | 2.5-4.5 | 1.5-6 | 2.6-5.0 | 1650 |

Double Phoenix Tail Fountain Nozzle
There are several small straight nozzle on it. When the water sprays out, these water columns look like several fingers.




Product Parameter

|  | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|---|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
| (Chromium-plated Brass) | EF1280 | 1.0" / DN25 | 20-150 | 1.0-1.5 | 1.5-4 | 2.5-3.5 | 1033 |
| | EF1281 | 1.5" / DN40 | 20-180 | 1.2-2.2 | 1.5-5 | 2.5-3.8 | 1200 |
| | EF1282 | 2.0" / DN50 | 20-220 | 1.5-3.5 | 1.5-6 | 2.6-5.0 | 1370 |

Double Layer Flower Water Column Fountain Nozzle
When the water sprays out from the top nozzle and the lower layer nozzles, it looks like a blossoming flower.



Product Parameter

|  | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|---|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| (Chromium-plated Brass) | EF1290 | 1.0" / DN25 | 35 | 8 | 1.5 | 1.3 | 380 |
| | EF1291 | 1.5" / DN40 | 65 | 10 | 1.8 | 1.5 | 500 |
| | EF1292 | 2.0" / DN50 | 80 | 13 | 2 | 1.8 | 700 |

Product Description

2. Classic and Ordinary Fountain Nozzle --- Brass Chrome-plated Material – Water Film Fountain Nozzle

Mushroom Hemisphere Fountain Nozzle
The characteristic of this nozzle is small sound, well-distributed water film, and little water consumption, so you need to adjust the cap on the top of the nozzle to control the water flow.



Product Parameter

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | | Est.Net Weight(g) |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-----|-------------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | | |
| EF1300 | 0.5" / DN15 | 15-30 | 1.1 | 0.2 | 0.3 | 160 | |
| EF1301 | 3/4" / DN20 | 15-30 | 1.5 | 0.25 | 0.5 | 180 | |
| EF1302 | 1.0" / DN25 | 20-35 | 2 | 0.25 | 0.6 | 310 | |
| EF1303 | 1.5" / DN40 | 20-55 | 3 | 0.4 | 1 | 475 | |
| EF1304 | 2.0" / DN50 | 35-70 | 5 | 0.5 | 1.2 | 785 | |
| EF1305 | 2.5" / DN65 | 40-100 | 10 | 0.5 | 1.6 | 983 | |

(Chromium-plated Brass)

Trumpet Flower/Morning Glory/Bell Shaped Nozzle
When the water column is reflected, the thin film display a shape like a trumpet flower. You can adjust the cap on the top to control the water flow.




Product Parameter

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | | Net Weight(g) |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-----|---------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | | |
| EF1310 | 1/2" / DN15 | 20-20 | 1.5 | 0.25 | 0.6 | 160 | |
| EF1311 | 3/4" / DN20 | 20-25 | 2 | 0.25 | 0.6 | 160 | |
| EF1312 | 1.0" / DN25 | 20-35 | 2 | 0.4 | 1 | 310 | |
| EF1313 | 1.5" / DN40 | 35-55 | 3 | 0.5 | 1.5 | 452 | |
| EF1314 | 2.0" / DN50 | 35-70 | 5 | 0.7 | 1.8 | 678 | |

(Stainless Steel 304/316)

Umbrella Nozzle
The characteristic of this nozzle is small sound, well-distributed water film, and little water consumption, so you need to adjust the valve to control the water flow and the cap on the top of the nozzle.



Product Parameter

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | | Net Weight(g) |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-----|---------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | | |
| EF1320 | 1/2" / DN15 | 15-30 | 1.1 | 0.2 | 0.3 | 210 | |
| EF1321 | 3/4" / DN20 | 15-30 | 1.5 | 0.25 | 0.5 | 328 | |
| EF1322 | 1.0" / DN25 | 20-35 | 2 | 0.3 | 0.6 | 350 | |
| EF1323 | 1.5" / DN40 | 20-55 | 3 | 0.4 | 1.0 | 500 | |

(Chromium-plated Brass)

Double Layer Hemisphere Trumpet Nozzle(Lift Type)
The characteristic of this nozzle is small sound, well-distributed water film, and little water consumption, so you need to adjust the valve to control the water flow and the cap on the top of the nozzle.
(Lift Type means: when the water column stops spray, the nozzle can be sunk/buried underwater.)



Product Parameter

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | | Est.Net Weight(g) |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|------|-------------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | | |
| EF1330 | 1.0" / DN25 | 20-35 | 3 | 0.25 | 0.5 | 460 | |
| EF1331 | 1.5" / DN40 | 20-55 | 4 | 0.4 | 0.6 | 708 | |
| EF1332 | 2.0" / DN50 | 35-70 | 7 | 0.5 | 1 | 1250 | |

(Chromium-plated Brass)

Product Description



2. Classic and Ordinary Fountain Nozzle --- Brass Chrome-plated Material – Water Film Fountain Nozzle

Double Layer Hemisphere Trumpet Nozzle(Lift Type)
The characteristic of this nozzle is small sound, well-distributed water film, and little water consumption, so you need to adjust the valve to control the water flow and the cap on the top of the nozzle.
(Lift Type means: when the water column stops spray, the nozzle can be sunk/buried underwater.)




Product Parameter

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
| EF1340 | 1.0" / DN15 | 20-35 | 2 | 0.3 | 0.6 | 568 |
| EF1341 | 1.5" / DN20 | 20-55 | 3-4 | 0.4 | 0.9 | 990 |
| EF1342 | 2.0" / DN40 | 35-70 | 3-5 | 0.4 | 1.2 | 1230 |

(Stainless Steel 304/316)

Adjustable Fan Shape Fountain Nozzle
Because of the design, when the water film sprays out, it's like a fan. When at night combined with RGB lights, the water column seems like a peacock spreads its tail.




Product Parameter

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
| EF1350 | 1/2" / DN15 | 30-50 | 2.5 | 0.2-0.6 | 0.4-0.8 | 195 |
| EF1351 | 3/4" / DN20 | 30-50 | 2.5 | 0.2-0.6 | 0.6-1.2 | 195 |
| EF1352 | 1.0" / DN25 | 30-80 | 6-22 | 0.3-0.8 | 0.6-1.2 | 545 |
| EF1353 | 1.5" / DN40 | 30-80 | 12-28 | 0.3-1.0 | 0.8-1.5 | 588 |
| EF1354 | 2.0" / DN50 | 30-80 | 15-41 | 0.3-1.3 | 1.0-2.2 | 692 |

(Chromium-plated Brass)

Fixed Fan Shape Fountain Nozzle
Because of the design, when the water film sprays out, it's like a fan. When at night combined with RGB lights, the water column seems like a peacock spreads its tail.




Product Parameter

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
| EF1350B | 1.0" / DN25 | 30-80 | 6-22 | 0.3-0.8 | 0.6-1.2 | 845 |
| EF1351B | 1.5" / DN40 | 30-80 | 12-28 | 0.3-1.0 | 0.8-1.5 | 1143 |
| EF1352B | 2.0" / DN50 | 30-80 | 15-41 | 0.3-1.3 | 1.0-2.2 | 1336 |

(Chromium-plated Brass)

Fixed Fan Shape Fountain Nozzle
Because of the design, when the water film sprays out, it's like a fan. When at night combined with RGB lights, the water column seems like a peacock spreads its tail.



Product Parameter

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
| EF1355 | 3/4" / DN20 | 30-50 | 2.8 | 0.2-0.7 | 0.4-1.0 | 320 |
| EF1356 | 1.0" / DN25 | 30-80 | 7.2-25 | 0.3-0.9 | 0.5-1.5 | 570 |
| EF1357 | 1.5" / DN40 | 30-80 | 14-30 | 0.3-1.2 | 0.8-1.8 | 1300 |

(Chromium-plated Brass)

Product Description

2. Classic and Ordinary Fountain Nozzle --- Brass Chrome-plated Material – Water Film Fountain Nozzle

Trumpet Flower Morning Glory Bell Shaped Nozzle
 When the water column is reflected, the thin film display a shape like a trumpet flower. There's also a water column sprays from the central area.



(Chromium-plated Brass)

Product Parameter

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| EF1360 | 3/4" / DN20 | 25-80 | 2-3 | 1-2 | 0.5 | 167 |
| EF1361 | 1.0" / DN25 | 25-80 | 3-6 | 1.5-3 | 0.6 | 315 |
| EF1362 | 1.5" / DN40 | 25-100 | 5-8 | 1.8-4 | 1.0 | 475 |
| EF1363 | 2.0" / DN50 | 25-150 | 5-10 | 1.8-5 | 1.5 | 800 |

Product Description




2. Classic and Ordinary Fountain Nozzle --- Brass Chrome-plated Material – Aerated Fountain Nozzle

Ice Tower Cedar Jet Nozzle
The water column is filled with bubble and looks like a high tower. when it works with the light, it looks more magic.




Product Parameter

|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| | EF1400 | 1/2" / DN15 | 40-200 | 2-3 | 1-1.8 | 1.0 | 105 |
| | EF1401 | 3/4" / DN20 | 40-200 | 2-4 | 1-2.5 | 1.0 | 105 |
| | EF1402 | 1.0" / DN25 | 40-200 | 6-10 | 1-4 | 1.3 | 280 |
| | EF1403 | 1.5" / DN40 | 50-300 | 8-13 | 1-5 | 1.6 | 640 |
| | EF1404 | 2.0" / DN50 | 50-400 | 12-25 | 1-6 | 2.0 | 875 |
| | EF1405 | 2.5" / DN65 | 50-450 | 21-50 | 1-8 | 3.5 | 4400 |
| | EF1406 | 3.0" / DN80 | 50-450 | 21-50 | 1-10 | 3.5 | 4500 |


Bubbling Fountain Nozzle Kit
When the air involved in the nozzle, the water column is filled with many white bubbles.
When combined with RGB fountain light, it looks very magic.




Product Parameter

|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| | EF1410 | 1/2" / DN15 | 50-100 | 1.5-3.0 | 0.15-0.3 | 0.1-0.2 | 126 |
| | EF1411 | 3/4" / DN20 | 50-100 | 2-5 | 0.2-0.35 | 0.15-0.3 | 126 |
| | EF1412 | 1.0" / DN25 | 50-100 | 3.5-8 | 0.3-0.5 | 0.2-0.4 | 270 |
| | EF1413 | 1.5" / DN40 | 50-100 | 10-18 | 0.4-0.8 | 0.3-0.5 | 430 |
| | EF1414 | 2.0" / DN50 | 60-150 | 17-25 | 0.4-0.8 | 0.3-0.6 | 650 |
| | EF1415 | 2.5" / DN65 | 100-200 | 20-35 | 0.5-1.0 | 0.4-0.7 | 790 |
| | EF1416 | 3.0" / DN80 | 100-200 | 25-47 | 0.5-1.2 | 0.5-0.8 | 1000 |


Spring Shower Fountain Bubbling Nozzle(With Tube)
The air is sucked when the water sprays out, and there are many bubbles and looks white. It's more elegant at night when there's varied underwater RGB lights.




Product Parameter

|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| | EF1417 | 1/2" / DN15 | 50-100 | 2.0-4.0 | 0.1-0.25 | 0.15-0.25 | 140 |
| | EF1418 | 3/4" / DN20 | 50-150 | 2.0-5.0 | 0.2-0.35 | 0.15-0.3 | 205 |
| | EF1419 | 1.0" / DN25 | 50-150 | 3.5-8.0 | 0.3-0.5 | 0.2-0.4 | 310 |
| | EF1420 | 1.5" / DN40 | 50-150 | 10-18 | 0.4-0.8 | 0.3-0.5 | 560 |
| | EF1421 | 2.0" / DN50 | 60-150 | 17-25 | 0.4-0.8 | 0.3-0.6 | 950 |

Bubbling Spring Fountain Nozzle(Without Pipe)
There is no air suction pipe in the bubbling nozzle, so the water height is almost the same and looks quiet and magic, especially work with the lights.



Product Parameter

|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| | EF1422 | 0.5" / DN15 | 50-100 | 1.5-3 | 0.15-0.3 | 0.1-0.2 | 126 |
| | EF1423 | 0.75" / DN20 | 50-100 | 2-5 | 0.2-0.35 | 0.15-0.3 | 126 |
| | EF1424 | 1.0" / DN25 | 50-100 | 3.5-8 | 0.3-0.5 | 0.2-0.4 | 222 |
| | EF1425 | 1.5" / DN40 | 50-100 | 10-18 | 0.4-0.8 | 0.3-0.5 | 343 |
| | EF1426 | 2.0" / DN50 | 60-150 | 17-25 | 0.4-0.8 | 0.3-0.6 | 520 |
| | EF1427 | 2.5" / DN65 | 70-200 | 20-30 | 0.6-0.8 | 0.4-0.6 | 1500 |
| | EF1428 | 3.0" / DN80 | 80-250 | 25-45 | 0.8-1.0 | 0.5-0.8 | 1830 |
| | EF1429 | 4.0" / DN100 | 80-300 | 35-50 | 0.8-1.0 | 0.5-0.8 | 3000 |

Product Description




2. Classic and Ordinary Fountain Nozzle --- Brass Chrome-plated Material – Aerated Fountain Nozzle

Aerified/Aerated Flow Fountain Nozzle

The air is sucked when the water sprays out, which makes small water flow rapid and quick, and the water column is looks white and transparent. You can adjust height of the cap of control the air, more air, the water looks more thin and white.



Product Parameter


|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| | EF1430 | 1.0" / DN25 | 50-150 | 3.0-5.0 | 0.5-3.0 | 0.3-0.8 | 320 |
| | EF1431 | 1.5" / DN40 | 50-150 | 5.0-10.0 | 1.5-5.0 | 0.5-1.0 | 700 |
| | EF1432 | 2.0" / DN50 | 60-160 | 6.0-15 | 1.5-6.5 | 0.5-1.0 | 900 |
| | EF1433 | 2.5" / DN65 | 60-200 | 8.0-26 | 1.5-8.0 | 0.5-1.2 | 1200 |

Adjustable Jade Column Fountain Nozzle

The air is sucked when the water sprays out, when the sunshine or GRB lights is reflected, the water column is like many columns of jade.



Product Parameter


|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| | EF1440 | 3/4" / DN20 | 50-150 | 2.7-3.8 | 1.5-5.0 | 0.3-0.7 | 315 |
| | EF1441 | 1.0" / DN25 | 60-180 | 3.6-6.0 | 2.0-7.0 | 0.3-0.8 | 435 |
| | EF1442 | 1.5" / DN40 | 60-200 | 6.0-18 | 2.0-8.0 | 0.5-1.0 | 635 |
| | EF1443 | 2.0" / DN50 | 60-280 | 7.0-28 | 2.0-10 | 0.5-1.2 | 780 |

Fixed Jade Column Nozzle

When the water column sprays out, and flected by the sunshine, it's glittering and looks like a jade column. It can be used as a dry land fountain and a water fountain.



Product Parameter


|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| | EF1444 | 3/4" / DN20 | 50-150 | 2.7-3.8 | 1.5-5.0 | 0.3-0.7 | 290 |
| | EF1445 | 1.0" / DN25 | 60-180 | 3.6-6.0 | 2.0-7.0 | 0.3-0.8 | 550 |
| | EF1446 | 1.5" / DN40 | 60-200 | 6.0-18 | 2.0-8.0 | 0.5-1.0 | 1167 |
| | EF1447 | 2.0" / DN50 | 60-280 | 7.0-28 | 2.0-10.0 | 0.5-1.2 | 1300 |

Frothy Foam/Multibranch Nozzle

The air is sucked when the water sprays out, and there are many bubbles. It looks better if the water column is ups and downs like computer control water fountain.



Product Parameter

|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| | EF1450 | 1/2" / DN15 | 60-100 | 2.0-4.0 | 0.5-2.0 | 0.15-0.3 | 281 |
| | EF1451 | 3/4" / DN20 | 60-100 | 4.0-7.0 | 1.0-3.0 | 0.2-0.4 | 422 |
| | EF1452 | 1.0" / DN25 | 80-150 | 6.0-10.0 | 1.5-4.0 | 0.3-0.5 | 700 |
| | EF1453 | 1.5" / DN40 | 80-200 | 10-15 | 2.0-5.0 | 0.3-0.6 | 900 |


Product Description



2. Classic and Ordinary Fountain Nozzle --- Brass Chrome-plated Material – Aerated Fountain Nozzle


Aerated Frothy Cascade Jet Nozzle
Bubbles go along with the water column when the air is involved, it looks elegant when work with water screen, water bridge and other types of fountain.
There's a sparepart at the bottom to make the nozzle adjustable.



|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| | | | EF1460 | 1.0" / DN25 | 80-100 | 4-7 | 1-6 |
| EF1461 | 1.5" / DN40 | 80-150 | 4-8 | 1-8 | 1.5-3.0 | 2100 | |


Jade Column Nozzle
When the water column sprays out, and reflected by the sunshine, it's glittering and looks like a jade column.
It can be used as a dry land fountain and a water fountain.




|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|---------|------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) | | |
| | | | EF1470 | 1.0" / DN25 | 50-200 | 6-12 | 1.5-5.5 | 0.5-0.8 | 680 |
| | | | EF1471 | 1.5" / DN40 | 50-200 | 10-15 | 2.0-7.0 | 0.6-1.0 | 1717 |
| EF1472 | 2.0" / DN50 | 50-250 | 15-20 | 2.0-12.0 | 0.6-1.2 | 2826 | | | |


Rotating Fountain Nozzle
The pushing force of the water flow make the fountain nozzle rotate. When the fountain works, it looks like a helix.



|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | | | |
|---|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|---------|------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) | | |
| | | | EF1500 | 1/2" / DN15 | 40-80 | 2.2-4.0 | 1.5-3 | 0.5-1.5 | 450 |
| | | | EF1501 | 3/4" / DN20 | 40-80 | 2.2-4.5 | 1.5-3 | 0.5-1.5 | 450 |
| | | | EF1502 | 1.0" / DN25 | 40-100 | 3.4-8.5 | 2.0-4.0 | 1.0-1.5 | 859 |
| | | | EF1503 | 1.5" / DN40 | 40-120 | 5.7-11 | 2.3-5.5 | 1.5-2.0 | 1050 |
| EF1504 | 2.0" / DN50 | 40-150 | 14.5-25.5 | 2.7-7.0 | 2.0-3.0 | 2200 | | | |

Rotating Fountain Nozzle(Flat Head)
The pushing force of the water flow make the fountain nozzle rotate. When the fountain works, it looks like a helix.



|  (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| | | | EF1506 | 1.0" / DN25 | 40-100 | 3.4-8.5 | 2.0-4.0 |


Product Description




2. Classic and Ordinary Fountain Nozzle --- Brass Chrome-plated Material – Aerated Fountain Nozzle


Crab Claw/Windmill Rotating Fountain Nozzle
The pushing force of the water flow make the fountain nozzle rotate by the angle of 45 degree. It looks like a windmill and charming at night when combined with RGB lights.



| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
|  (Chromium-plated Brass) | EF1510 | 1.0" / DN25 | 30-80 | 3.5-5 | 1.0-1.8 | 1.0-2.0 | 963 |
| | EF1511 | 1.5" / DN40 | 30-100 | 4.8-7 | 1.0-3.3 | 1.0-3.3 | 1370 |
| | EF1512 | 2.0" / DN50 | 50-150 | 5.5-16 | 2.0-4.5 | 2.0-4.5 | 2480 |


Dandelion Crystal Ball Nozzle
There are many tube nozzles on the ball, when the water sprays out, combined with the RGB light, you can see a beautiful and magic dandelion fountain.



| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|-------------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
|  (Chromium-plated Brass) | EF1600 (30 Tube) | 1.0" / DN25 | 80-100 | 5.0-10 | 1.0 | 0.6 | 3720 |
| | EF1601 (41 Tube) | 1.5" / DN40 | 80-100 | 8.0-15 | 1.5 | 1 | 6411 |
| | EF1602 (65 Tube) | 2.0" / DN50 | 80-150 | 20-25 | 1.8 | 1.2 | 13795 |
| | EF1603 (105 Tube) | 3.0" / DN80 | 80-200 | 40-50 | 2.3 | 1.8 | 30000 |


Dandelion Crystal Ball Nozzle(Hemisphere)
There are many tube nozzles on the ball, when the water sprays out, combined with the RGB light, you can see a beautiful and magic dandelion fountain. You can also try our round ball dandelion fountain nozzle on the right side.



| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|------------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
|  (Chromium-plated Brass) | EF1610 (16 Tube) | 1.0" / DN25 | 80-100 | 3.0-5.0 | 1.0 | 0.6 | 2800 |
| | EF1611 (26 Tube) | 1.5" / DN40 | 80-100 | 5.0-8.0 | 1.5 | 1 | 4370 |
| | EF1612 (46 Tube) | 2.0" / DN50 | 80-150 | 10-15 | 1.8 | 1.2 | 9550 |
| | EF1613 (52 Tube) | 3.0" / DN80 | 80-200 | 30-40 | 2.3 | 1.8 | 19700 |

Dandelion Crystal Ball Fountain Head
There are many tube holes on the ball, when the tubes are connected, and the water sprays out, combined with the RGB light, you can see a beautiful and magic dandelion fountain.



| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|---|--------------|---------------------------|------------------------|--------------------------|-----------------------|------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Outlet(mm) | Est.Net Weight(g) |
|  (Brass, Chrome Plated) | | 1.0" / DN25 | 80-100 | 3.0-5.0 | | 110 | 1050 |
| | | 1.5" / DN40 | 80-100 | 5.0-8.0 | | 125 | 1450 |
| | | 2.0" / DN50 | 80-150 | 10-15 | | 160 | 3850 |
| | | 3.0" / DN80 | 80-200 | 30-40 | | 220 | 6800 |

Product Description




2. Classic and Ordinary Fountain Nozzle --- Brass Chrome-plated Material – Aerated Fountain Nozzle

Dandelion Crystal Ball Fountain Head
The ball is brass material, but the tubes are stainless steel, when the water sprays out, combined with the RGB light, you can see a beautiful and magic dandelion fountain.




Product Parameter

|  (Brass, Chrome Plated) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-------------------|------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Quantity of Tubes | Water Outlet(mm) |
| | | 1.0" / DN25 | 80-100 | 3.0-5.0 | 30 | 3350 |
| | | 1.5" / DN40 | 80-100 | 5.0-8.0 | 41 | 5841 |
| | | 2.0" / DN50 | 80-150 | 10-15 | 65 | 12500 |
| | | 3.0" / DN80 | 80-200 | 30-40 | 105 | 27500 |

Tubes and caps for Dandelion Fountain
The tubes and caps are brass material, when the water sprays out from the dandelion fountain, combined with the RGB light, you can see a beautiful and magic dandelion fountain.




Product Parameter

|  (Brass, Chrome Plated) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|---|--------------|---------------------------|------------------------|--------------------------|------------------|------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Tube Length (mm) | Water Outlet(mm) | Est.Net Weight(g) |
| | | 1.0" / DN25 | | | 20 | 0.2 | 65 |
| | | 1.5" / DN40 | | | 30 | 0.2 | 97 |
| | | 2.0" / DN50 | | | 40 | 0.2 | 130 |
| | | 3.0" / DN80 | | | 60 | 0.2 | 195 |

Tubes and caps for Dandelion Fountain
The tubes and caps are stainless steel material, when the water sprays out from the dandelion fountain, combined with the RGB light, you can see a beautiful and magic dandelion fountain.



Product Parameter

|  (Stainless Steel304, 316) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|---|--------------|---------------------------|------------------------|--------------------------|------------------|------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Tube Length (mm) | Water Outlet(mm) | Est.Net Weight(g) |
| | | 1.0" / DN25 | | | 20 | 0.1/0.15 | 56 |
| | | 1.5" / DN40 | | | 30 | 0.1/0.15 | 83 |
| | | 2.0" / DN50 | | | 40 | 0.1/0.15 | 110 |
| | | 3.0" / DN80 | | | 60 | 0.1/0.15 | 167 |

Product Description



2. Classic and Ordinary Fountain Nozzle --- Brass Chrome-plated Material – Misting or Water Curtain Fountain Nozzle

Misting Nozzle

When the misting water sprays out, reflected by the sunshine, you can see a rainbow. When work at night combined with the light, you can get a magic scene.

This nozzle is mainly used in sculpture, heat insulation, dust prevention and big fountain project.



Product Parameter

| (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|-------------------------|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
| | EF1700 | 1/2" / DN15 | 70-250 | 0.8-1.8 | 1.0-2.3 | 1-2 | 45 |
| | EF1701 | 3/4" / DN20 | 100-300 | 1.0-2.3 | 1.0-2.8 | 1.5-3 | 83 |
| | EF1702 | 1.0" / DN25 | 100-400 | 1.2-3.0 | 1.0-3.2 | 1.8-3.5 | 143 |
| | EF1703 | 1.5" / DN40 | 200-400 | 1.2-3.8 | 1.0-3.5 | 1.8-4.0 | 400 |

Adjustable Little Direct Spray Nozzle


This kind of nozzle is mainly used in water curtain fountain.



Product Parameter

| (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|-------------------------|--------------|---------------------------|------------------------|--------------------------|-----------------------|------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Outlet(mm) | Est.Net Weight(g) |
| | EF1710 | M8 | 20-40 | 0.1-0.12 | | 3 | 60 |
| | EF1711 | M10 | 20-40 | 0.1-0.15 | | 3.5 | 88 |
| | EF1712 | 1/4" / DN6.5 | 20-45 | 0.1-0.18 | | 4 | 93 |
| | EF1713 | 3/8" / DN9.5 | 20-50 | 0.1-0.2 | | 5 | 120 |

Adjustable Little Direct Spray Nozzle with Valve
This kind of nozzle is mainly used in water curtain fountain.



Product Parameter

| (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|-------------------------|--------------|---------------------------|------------------------|--------------------------|-----------------------|------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Outlet(mm) | Est.Net Weight(g) |
| | EF1710-1 | M8 | 20-40 | 0.1-0.12 | | 3 | 60 |
| | EF1710-2 | M10 | 20-40 | 0.1-0.15 | | 3.5 | 88 |
| | EF1710-3 | 1/4" / DN6.5 | 20-45 | 0.1-0.18 | | 4 | 93 |
| | EF1710-4 | 3/8" / DN9.5 | 20-50 | 0.1-0.2 | | 5 | 120 |

Little Direct Spray Nozzle(Fixed Direction)
This kind of nozzle is mainly used in water curtain fountain.



Product Parameter


| (Chromium-plated Brass) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|-------------------------|--------------|---------------------------|------------------------|--------------------------|-----------------------|------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Outlet(mm) | Est.Net Weight(g) |
| | EF1720 | M8 | 20-40 | 0.1-0.12 | | 3 | 60 |
| | EF1721 | M10 | 20-40 | 0.1-0.15 | | 3.5 | 88 |
| | EF1722 | 1/4" / DN6.5 | 20-45 | 0.1-0.18 | | 4 | 93 |
| | EF1723 | 3/8" / DN9.5 | 20-50 | 0.1-0.2 | | 5 | 120 |


Product Description




2. Classic and Ordinary Fountain Nozzle --- Brass/Stainless Steel Material – Combined Fountain Nozzle


Silver Tassel Fountain Nozzle
When the water sprays out, there are several parabola or arced water column around the nozzle, it looks like a silver tassel when the sunshine or light is reflected.




| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) |
|  (Stainless Steel+Brass) | EF1800 | 1" / DN25 | 50-100 | 2.2-3.8 | 0.4-1.2 | 1-2 |
| | EF1801 | 1.5" / DN40 | 50-120 | 3.8-6.8 | 0.5-1.5 | 1-3 |


Trumpet Flower/Morning Glory/Bell Shaped Nozzle (Lengthened and Conjoined Type)
When the water column is reflected, the thin film display a shape like a trumpet flower. You can adjust the valve and the cap on the top to control the water flow.




| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
|  (Stainless Steel 304/316) | EF1810 | 1/2" / DN15 | 15-30 | 1 | 0.2 | 0.3 | 184 |
| | EF1811 | 3/4" / DN20 | 15-30 | 2 | 0.25 | 0.5 | 308 |
| | EF1812 | 1.0" / DN25 | 20-35 | 3 | 0.25 | 0.6 | 406 |
| | EF1813 | 1.5" / DN40 | 20-55 | 4 | 0.4 | 1.0 | 500 |


Mushroom Fountain Nozzle(Lengthened)
When the water column is reflected, the thin film display a shape like a mushroom. The sound of the water flow is very smooth and quiet.

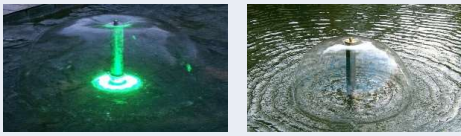

| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|---|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
|  (Stainless Steel 304/316) | EF1820 | 1/2" / DN15 | 15-30 | 1.1 | 0.2 | 0.3 | 30 |
| | EF1821 | 3/4" / DN20 | 15-30 | 1.5 | 0.25 | 0.5 | 40 |
| | EF1822 | 1.0" / DN25 | 20-35 | 2 | 0.3 | 0.6 | 80 |
| | EF1823 | 1.5" / DN40 | 20-55 | 3 | 0.4 | 1.0 | 120 |

Silver Mushroom and Jade Tassel Nozzle
When the water sprays out, there is a mushroom and some silver tassel nozzles, looks magic when the sunshine or light is reflected. The top and bottom nozzle can be changed to other nozzles.




| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) |
|  (Stainless Steel+Brass) | EF1870 | 1.5" / DN40 | 50-150 | 3.0-10 | 0.8-1.5 | 1-2 |


Product Description



2. Classic and Ordinary Fountain Nozzle --- Brass/Stainless Steel Material – Combined Fountain Nozzle

Hemisphere Trumpet Nozzle(Lift Type)
 The characteristic of this nozzle is small sound, well-distributed water film, and little water consumption, so you need to adjust the valve to control the water flow and the cap on the top of the nozzle.
 (Lift Type means: when the water column stops spray, the nozzle can be sunk/buried underwater.)




|  (Stainless Steel 304/316) | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
| | EF1880 | 1.0" / DN15 | 20-35 | 2 | 0.3 | 0.6 | 224 |
| | EF1881 | 1.5" / DN20 | 20-55 | 3-4 | 0.4 | 0.9 | 328 |
| | EF1882 | 2.0" / DN40 | 35-70 | 3-5 | 0.4 | 1.2 | 525 |


Product Description




2. Classic and Ordinary Fountain Nozzle --- Stainless Steel 304/316 Material Fountain Nozzle


Silver Tassel Fountain Nozzle
When the water sprays out, there are several parabola or arced water column around the nozzle, it looks like a silver tassel when the sunshine or light is reflected.




| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) |
|  (Stainless Steel+Brass) | EF1800 | 1" / DN25 | 50-100 | 2.2-3.8 | 0.4-1.2 | 1-2 |
| | EF1801 | 1.5" / DN40 | 50-120 | 3.8-6.8 | 0.5-1.5 | 1-3 |


Trumpet Flower/Morning Glory/Bell Shaped Nozzle (Lengthened and Conjoined Type)
When the water column is reflected, the thin film display a shape like a trumpet flower. You can adjust the valve and the cap on the top to control the water flow.




| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
|  (Stainless Steel 304/316) | EF1810 | 1/2" / DN15 | 15-30 | 1 | 0.2 | 0.3 | 184 |
| | EF1811 | 3/4" / DN20 | 15-30 | 2 | 0.25 | 0.5 | 308 |
| | EF1812 | 1.0" / DN25 | 20-35 | 3 | 0.25 | 0.6 | 406 |
| | EF1813 | 1.5" / DN40 | 20-55 | 4 | 0.4 | 1.0 | 500 |


Mushroom Fountain Nozzle(Lengthened)
When the water column is reflected, the thin film display a shape like a mushroom. The sound of the water flow is very smooth and quiet.

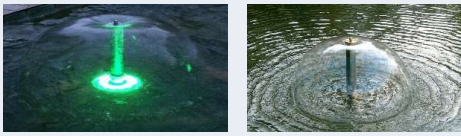

| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|---|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
|  (Stainless Steel 304/316) | EF1820 | 1/2" / DN15 | 15-30 | 1.1 | 0.2 | 0.3 | 30 |
| | EF1821 | 3/4" / DN20 | 15-30 | 1.5 | 0.25 | 0.5 | 40 |
| | EF1822 | 1.0" / DN25 | 20-35 | 2 | 0.3 | 0.6 | 80 |
| | EF1823 | 1.5" / DN40 | 20-55 | 3 | 0.4 | 1.0 | 120 |

Silver Mushroom and Jade Tassel Nozzle
When the water sprays out, there is a mushroom and some silver tassel nozzles, looks magic when the sunshine or light is reflected. The top and bottom nozzle can be changed to other nozzles.



| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) |
|  (Stainless Steel+Brass) | EF1870 | 1.5" / DN40 | 50-150 | 3.0-10 | 0.8-1.5 | 1-2 |



Product Description



2. Classic and Ordinary Fountain Nozzle --- Stainless Steel 304/316 Material Fountain Nozzle


Hemisphere Trumpet Nozzle(Lift Type)
The characteristic of this nozzle is small sound, well-distributed water film, and little water consumption, so you need to adjust the valve to control the water flow and the cap on the top of the nozzle.
(Lift Type means: when the water column stops spray, the nozzle can be sunk/buried underwater.)




| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | Est.Net Weight(g) | | | | | | | |
|---|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|--------|-------------|-------|-----|-----|-----|-----|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | | | | | | | | |
|  | EF1880 | 1.0" / DN15 | 20-35 | 2 | 0.3 | 0.6 | 224 | | | | | | | |
|  | | | | | | | | EF1881 | 1.5" / DN20 | 20-55 | 3-4 | 0.4 | 0.9 | 328 |
| | | | | | | | | | | | | | | |

(Stainless Steel 304/316)

Universal Direct Spray Fountain Nozzle
You can adjust the direction/angle before the water spray out, and this fountain nozzle is very multi-functional.





| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | Est.Net Weight(g) |
|---|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | |
|  | EF2111 | 0.5" / DN15 | 15-65 | 0.3-1.5 | 1.0-4.0 | Radial | 80 |
| | EF2112 | 0.75" / DN20 | 15-80 | 1.0-3.0 | 1.0-5.0 | Radial | 130 |
| | EF2113 | 1.0" / DN25 | 50-100 | 2.0-4.0 | 3.0-6.0 | Radial | 180 |
| | EF2114 | 1.5" / DN40 | 50-150 | 3.0-6.0 | 3.0-7.0 | Radial | 482 |
| | EF2115 | 2.0" / DN50 | 50-200 | 5.0-8.0 | 3.0-8.0 | Radial | 770 |
| | EF2116 | 2.5" / DN65 | 70-250 | 10.0-25.0 | 3.5-15.0 | Radial | 2200 |
| | EF2117 | 3.0" / DN80 | 70-330 | 10.0-40.0 | 3.5-20.0 | Radial | 3200 |
| | EF2118 | 4.0" / DN100 | 80-400 | 10.0-60.0 | 3.5-25.0 | Radial | 7300 |

(Stainless Steel 304/316)

Direct Nozzle

Usually these direct nozzles spray together and can match well with big fountain project. When it works, the water column is direct and well arranged.




| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | Net Weight (g) |
|---|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|----------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | |
|  | EF2120 | 1" / DN25 | 70 | 21 | 3.5 | 1.3 | 520 |
| | EF2121 | 1.5" / DN40 | 100 | 29 | 6.9 | 2.8 | 1593 |
| | EF2122 | 2" / DN50 | 180 | 38 | 7.5 | 3.1 | 1670 |
| | EF2123 | 2.5" / DN65 | 240 | 47 | 10 | 3.3 | 3350 |
| | EF2124 | 3" / DN80 | 330 | 58 | 13 | 4 | 6500 |

(Stainless Steel 304/316)

All Direction Upstraight Spray Fountain Nozzle
The air is sucked when the water sprays out, and there are many bubbles and looks white. It's more elegant at night when there's varied underwater RGB lights.



| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | Net Weight(g) |
|---|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | |
|  | EF2130 | 1.0" / DN25 | 30-120 | 8-17 | 1.0-5.0 | 1.2 | 900 |
| | EF2131 | 1.5" / DN40 | 40-140 | 12-24 | 1.5-6.0 | 2.5 | 920 |

(Stainless Steel 304/316)


Product Description




2. Classic and Ordinary Fountain Nozzle --- Stainless Steel 304/316 Material Fountain Nozzle


Adjustable 3 Tier /3 Layers Water Fountain Nozzle
Water sprays out from three circle of nozzles, and each nozzle has an adjustable valve to control the water flow.
The inner and middle water column and the outer one display a flower type, so we call it three layer flower.



| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
|  (Stainless Steel 304/316) | EF2140 | 1.0" / DN25 | 25-60 | 2.1-4.3 | 1.0-4.0 | 0.8-1.5 | 1810 |
| | EF2141 | 1.5" / DN40 | 25-85 | 5.1-12.7 | 1.0-6.0 | 0.9-2.0 | 1900 |
| | EF2142 | 2.0" / DN50 | 25-115 | 6.9-22 | 1.0-8.0 | 1.2-4.0 | 2700 |


Flower Water Column Fountain Nozzle
When the water sprays out from the top nozzle and the lower layer nozzles, it looks like a blossoming flower.



| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|---|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
|  (Stainless Steel304/316) | EF2150 | 1" / DN25 | 40 | 7 | 1.5 | 1.3 | 395 |
| | EF2151 | 1.5" / DN40 | 60 | 10 | 1.8 | 1.5 | 510 |
| | EF2152 | 2" / DN50 | 80 | 12 | 2 | 1.8 | 650 |


Firework Fountain Nozzle
It looks like a burning firework when it works.
It's easy to install and suitable to be installed on many different kinds of water area.



| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
|  (Stainless Steel 304/316) | EF2160 | 1.0" / DN25 | 40 | 7 | 1.5 | 1.5 | 340 |
| | EF2161 | 1.5" / DN40 | 60 | 10 | 1.8 | 1.6 | 460 |

Phoenix Tail Fountain Nozzle
There are several small adjustable straight nozzle(with valve) on it. When the water sprays out, it looks like several fingers.



| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
|  (Stainless Steel 304/316) | EF2170 | 0.75" / DN20 | 50-70 | 2.0-4.0 | 2.0-4.0 | 1.5-5.0 | 450 |
| | EF2171 | 1.0" / DN25 | 50-150 | 6.5-13.5 | 2.0-4.0 | 1.5-5.0 | 985 |
| | EF2172 | 1.5" / DN40 | 50-200 | 7.5-19.5 | 2.0-5.0 | 2.0-6.0 | 1340 |

Product Description



2. Classic and Ordinary Fountain Nozzle --- Stainless Steel 304/316 Material Fountain Nozzle

Phoenix Tail Fountain Nozzle
There are several small nozzle jets, when the water sprays out, it looks like several fingers. This nozzle is mainly used in 1d, 2d, or 3d programmable fountain head.



(Stainless Steel 304/316)

Model Number

Connection Size (Inch/mm)

Product Parameter

| Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| 50-70 | 2.0-4.0 | 2.0-4.0 | 1.5-5.0 | 450 |
| 50-150 | 6.5-13.5 | 2.0-4.0 | 1.5-5.0 | 985 |
| 50-200 | 7.5-19.5 | 2.0-5.0 | 2.0-6.0 | 1340 |

EF2170B

0.75" / DN20

EF2171B

1.0" / DN25

EF2172B

1.5" / DN40

Trumpet Flower/Morning Glory/Bell Shaped Nozzle
When the water column is reflected, the thin film display a shape like a trumpet flower. You can adjust the valve and the cap on the top to control the water flow.



(Stainless Steel 304/316)

Model Number

Connection Size (Inch/mm)

Product Parameter

| Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| 20-35 | 3 | 0.25 | 0.6 | 425 |
| 20-55 | 4 | 0.4 | 1 | 560 |
| 35-70 | 7 | 0.5 | 1.5 | 815 |
| 40-100 | 10 | 0.7 | 1.8 | 1020 |

EF2200

1.0" / DN25

EF2201

1.5" / DN40

EF2202

2.0" / DN50

EF2203

2.5" / DN65

Mushroom Hemisphere Fountain Nozzle
The characteristic of this nozzle is small sound, well-distributed water film, and little water consumption, so you need to adjust the cap on the top of the nozzle to control the water flow.



(Stainless Steel 304/316)

Model Number

Connection Size (Inch/mm)

Product Parameter

| Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| 20-35 | 2 | 0.25 | 0.6 | 440 |
| 20-55 | 3 | 0.4 | 1 | 620 |
| 35-70 | 5 | 0.5 | 1.2 | 905 |
| 40-100 | 9 | 0.7 | 1.5 | 1100 |

EF2210

1.0" / DN25

EF2211

1.5" / DN40


EF2212

2.0" / DN50

EF2213

2.5" / DN65

Adjustable Fan Shape Fountain Nozzle
Because of the design, when the water film sprays out, it's like a fan. When at night combined with RGB lights, the water column seems like a peacock spreads its tail.

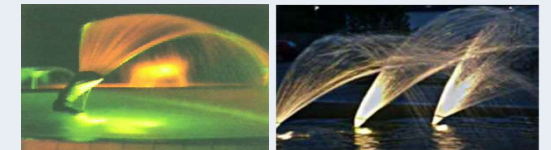

(Stainless Steel 304/316)

Model Number

Connection Size (Inch/mm)

Product Parameter

| Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| 30-50 | 2.5 | 0.2-0.6 | 0.4-0.8 | 184 |
| 30-80 | 6.0-22 | 0.3-0.8 | 0.6-1.2 | 410 |
| 30-80 | 12-28 | 0.3-1.0 | 0.8-1.5 | 510 |

EF2220

3/4" / DN20

EF2221

1.0" / DN25

EF2222

1.5" / DN40


Product Description



2. Classic and Ordinary Fountain Nozzle --- Stainless Steel 304/316 Material Fountain Nozzle


Fixed Fan Shape Fountain Nozzle
Because of the design, when the water film sprays out, it's like a fan. When at night combined with RGB lights, the water column seems like a peacock spreads its tail.



| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
|  (Stainless Steel 304/316) | EF2230A | 3/4" / DN20 | 30-50 | 2.8 | 0.2-0.7 | 0.4-1.0 | 315 |
| | EF2231A | 1.0" / DN25 | 30-80 | 7.2-25 | 0.3-0.9 | 0.6-1.5 | 488 |
| | EF2232A | 1.5" / DN40 | 30-80 | 14-30 | 0.3-1.2 | 0.8-1.8 | 1035 |


Bubbling Spring Fountain Nozzle(Without Pipe)
There is no air suction pipe in the bubbling nozzle, so the water height is almost the same and looks quiet and magic, especially work with the lights.




| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
|  (Stainless Steel 304/316) | EF2303 | 0.5" / DN15 | 50-100 | 1.5-3 | 0.15-0.3 | 0.1-0.2 | 135 |
| | EF2304 | 0.75" / DN20 | 50-100 | 2-5 | 0.2-0.35 | 0.15-3 | 135 |
| | EF2300 | 1.0" / DN25 | 50-100 | 3.5-8 | 0.3-0.5 | 0.2-0.4 | 240 |
| | EF2301 | 1.5" / DN40 | 50-100 | 10-18 | 0.4-0.8 | 0.3-0.5 | 425 |
| | EF2302 | 2.0" / DN50 | 60-150 | 17-25 | 0.4-0.8 | 0.3-0.6 | 600 |


Bubbling Fountain Nozzle Kit
When the air involved in the nozzle, the water column is filled with many white bubbles. When combined with RGB fountain light, it looks very magic.



| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|---|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
|  (Stainless Steel 304/316) | EF2310 | 1.0" / DN25 | 50-100 | 3.5-8 | 0.3-0.5 | 0.2-0.4 | 345 |
| | EF2311 | 1.5" / DN40 | 50-100 | 10-18 | 0.4-0.8 | 0.3-0.5 | 549 |
| | EF2312 | 2.0" / DN50 | 60-150 | 17-25 | 0.4-0.8 | 0.3-0.6 | 785 |

Spring Shower Fountain Bubbling Nozzle(With Tube)
The air is sucked when the water sprays out, and there are many bubbles and looks white. It's more elegant at night when there's varied underwater RGB lights.

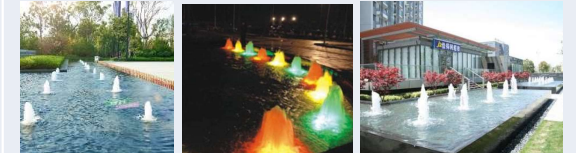



| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
|  (Stainless Steel 304/316) | EF2320 | 3/4" / DN20 | 50-150 | 2.0-5.0 | 0.2-0.35 | 0.15-0.3 | 206 |
| | EF2321 | 1.0" / DN25 | 50-150 | 3.5-8.0 | 0.3-0.5 | 0.2-0.4 | 282 |
| | EF2322 | 1.5" / DN40 | 50-150 | 10-18 | 0.4-0.8 | 0.3-0.5 | 530 |
| | EF2323 | 2.0" / DN50 | 60-150 | 17-25 | 0.4-0.8 | 0.3-0.6 | 820 |

Product Description

2. Classic and Ordinary Fountain Nozzle --- Stainless Steel 304/316 Material Fountain Nozzle


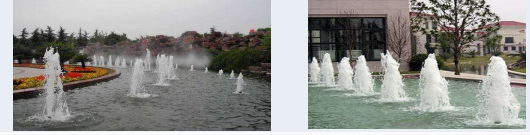
Cup Shape Bubbling Fountain Nozzle
When water sprays out, there are many bubbles. There is no air suction tube, so the water spay is not high.

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | | Est.Net Weight (g) |
|--------------|---------------------------|------------------------|-------------------------|-----------------------|-------------------------|-----|--------------------|
| | | Working Pressure (Kpa) | Flow(m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | | |
| EF2330 | 1.0" / DN25 | 50-100 | 3.5-8.0 | 0.3-0.5 | 0.2-0.4 | 240 | |
| EF2331 | 1.5" / DN40 | 50-100 | 10-18 | 0.4-0.8 | 0.3-0.6 | 324 | |

(Stainless Steel 304/316)



Foam Cascade Ice Tower Nozzle
The water column is filled with bubble and looks like a high tower. when it works with the light, it looks more magic.

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| EF2340A | 0.75" / DN20 | 40-200 | 2-4 | 1-4 | 0.2 | 260 |
| EF2341A | 1.0" / DN25 | 40-200 | 6-10 | 1-6 | 0.3 | 445 |
| EF2342A | 1.5" / DN40 | 50-330 | 8-20 | 1-8 | 0.6 | 907 |
| EF2343A | 2.0" / DN50 | 50-400 | 12-25 | 1-10 | 1.0 | 1285 |
| EF2344A | 3.0" / DN80 | 50-450 | 21-50 | 1-12 | 1.5 | 4155 |

(Stainless Steel 304/316)


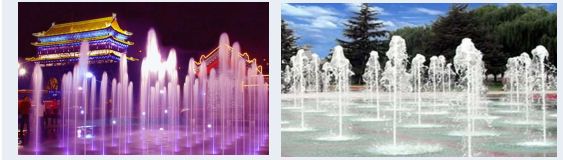
Foam Cascade Ice Tower Nozzle, Fixed
The water column is filled with bubble and looks like a high tower. when it works with the light, it looks more magic.

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| EF2340B | 0.75" / DN20 | 40-200 | 2-4 | 1-4 | 0.2 | 180 |
| EF2341B | 1.0" / DN25 | 40-200 | 6-10 | 1-6 | 0.3 | 185 |
| EF2342B | 1.5" / DN40 | 50-330 | 8-20 | 1-8 | 0.6 | 385 |
| EF2343B | 2.0" / DN50 | 50-400 | 12-25 | 1-10 | 1.0 | 798 |
| EF2344B | 3.0" / DN80 | 50-450 | 21-50 | 1-12 | 1.5 | 1120 |

(Stainless Steel 304/316)

Aerified/Aerated Flow Fountain Nozzle
The air is sucked when the water sprays out, which makes small water flow rapid and quick, and the water column is looks white and transparent. You can adjust height of the cap of control the air, more air, the water looks more thin and white.

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| EF2350 | 1.0" / DN25 | 50-150 | 3.0-5.0 | 0.5-3.0 | 0.3-0.8 | 420 |
| EF2351 | 1.5" / DN40 | 50-150 | 5.0-10.0 | 1.5-5.0 | 0.5-1.0 | 930 |
| EF2352 | 2.0" / DN40 | 60-160 | 6.0-15 | 1.5-6.5 | 0.5-1.0 | 1190 |

(Stainless Steel 304/316)

Product Description



2. Classic and Ordinary Fountain Nozzle --- Stainless Steel 304/316 Material Fountain Nozzle

Aerated Water Jade Column Nozzle
The air is sucked when the water sprays out, when the sunshine or GRB lights is reflected, the water column is like many columns of jade.



Product Parameter

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | | Net Weight(g) |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|------|---------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | | |
| EF2360A | 3/4" / DN20 | 50-150 | 2.7-3.8 | 1.5-5.0 | 0.3-0.7 | 334 | |
| EF2361A | 1.0" / DN25 | 60-180 | 3.6-6.0 | 2.0-7.0 | 0.3-0.8 | 509 | |
| EF2362A | 1.5" / DN40 | 60-200 | 6.0-18 | 2.0-8.0 | 0.5-1.0 | 769 | |
| EF2363A | 2.0" / DN50 | 60-280 | 7.0-28 | 2.0-10 | 0.5-1.2 | 1260 | |

(Stainless Steel 304/316)

Frothy Foam/Multibranch Nozzle
The air is sucked when the water sprays out, and there are many bubbles. It looks better if the water column is ups and downs like computer control water fountain.



Product Parameter

| Model Number | Connection Size (Inch/mm) | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | | | | |
| EF2371 | 3/4" / DN20 | 60-100 | 4.0-7.0 | 1.0-3.0 | 0.2-0.4 | 415 |
| EF2372 | 1.0" / DN25 | 80-150 | 6.0-10.0 | 1.5-4.0 | 0.3-0.5 | 637 |
| EF2373 | 1.5" / DN40 | 80-200 | 10.0-15.0 | 2.0-5.0 | 0.3-0.6 | 948 |
| EF2374 | 2.0" / DN50 | | | | | |

(Stainless Steel 304/316)

Europe Style Ice Tower Bubble Effect Nozzle
Bubbles go along with the water column when the air is involved, it looks elegant when work with water screen, water bridge and other types of fountain. You can adjust the water flow by yourself.



Product Parameter

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | | Net Weight(g) |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-----|---------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | | |
| EF2380 | 1.0" / DN25 | 50-200 | 10-15 | 2-3 | 0.5 | 846 | |

(Stainless Steel 304/316)

Bubbling Foam Cascade Jet, Plastic Material
Bubbles go along with the water column when the air is involved, it looks elegant when work with water screen, water bridge and other types of fountain. You can adjust the water flow by yourself.



Product Parameter

| Model Number | Connection Size (Inch/mm) | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | | | | |

(Stainless Steel 304/316)

Product Description



2. Classic and Ordinary Fountain Nozzle --- Stainless Steel 304/316 Material Fountain Nozzle

Crab Claw/Windmill Rotating Fountain Nozzle
The pushing force of the water flow make the fountain nozzle rotate by the angle of 45 degree. It looks like a windmill and charming at night when combined with RGB lights.



Product Parameter

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | | Net Weight(g) |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|------|---------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | | |
| EF2400 | 1.0" / DN25 | 30-40 | 3.5-14 | 1.0-1.8 | 1.0-2.0 | 1092 | |
| EF2401 | 1.5" / DN40 | 30-55 | 4.8-20 | 1.0-3.3 | 1.0-3.8 | 1460 | |
| EF2402 | 2.0" / DN50 | 50-70 | 5.5-30 | 2.0-4.5 | 2.2-4.5 | 2250 | |

(Stainless Steel 304/316)

Rotating Fountain Nozzle
The pushing force of the water flow make the fountain nozzle rotate. When the fountain works, it looks like a helix.



Product Parameter

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | | Net Weight(g) |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|------|---------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | | |
| EF2410 | 1.0" / DN25 | 40-100 | 3.4-8.5 | 2.0-4.0 | 1.0-1.5 | 933 | |
| EF2411 | 1.5" / DN40 | 40-120 | 5.7-11 | 2.3-5.5 | 1.5-2.0 | 1280 | |
| EF2412 | 2.0" / DN50 | 40-150 | 14.5-25.5 | 2.7-7.0 | 2.0-3.0 | 2400 | |

(Stainless Steel 304/316)

Misting Nozzle
When the misting water sprays out, reflected by the sunshine, you can see a rainbow. When work at night combined with the light, you can get a magic scene. This nozzle is mainly used in sculpture, heat insulation, dust prevention and big fountain project.




Product Parameter

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | | Est.Net Weight(g) |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-----|-------------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | | |
| EF2230A | 1/2" / DN15 | 70-250 | 0.8-1.8 | 1.0-2.3 | 1-2 | 65 | |
| EF2231A | 3/4" / DN20 | 100-300 | 1.0-2.3 | 1.0-2.8 | 1.5-3 | 115 | |
| EF2232A | 1.0" / DN25 | 100-400 | 1.2-3.0 | 1.0-3.2 | 1.8-3.5 | 174 | |

(Stainless Steel 304/316)

Dandelion Crystal Ball Nozzle
There are many tube nozzles on the ball, when the water sprays out, combined with the RGB light, you can see a beautiful and magic dandelion fountain.



Product Parameter

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | | Est.Net Weight(g) |
|-------------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------|-------------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | | |
| EF2510 (30 Tube) | 1.0" / DN25 | 80-100 | 5.0-10 | 1 | 0.6 | 4220 | |
| EF2511 (41 Tube) | 1.5" / DN40 | 80-100 | 8.0-15 | 1.5 | 1 | 6400 | |
| EF2512 (65 Tube) | 2.0" / DN50 | 80-150 | 20-25 | 1.8 | 1.2 | 12900 | |
| EF2513 (105 Tube) | 3.0" / DN80 | 80-200 | 40-50 | 2.3 | 1.8 | 27600 | |

(Stainless Steel 304/316)

Product Description



2. Classic and Ordinary Fountain Nozzle --- Stainless Steel 304/316 Material Fountain Nozzle

Dandelion Crystal Ball Nozzle(Hemisphere)
There are many tube nozzles on the ball, when the water sprays out, combined with the RGB light, you can see a beautiful and magic dandelion fountain. You can also try our round ball dandelion fountain nozzle on the right side.



Product Parameter

| Model Number | Connection Size (Inch/mm) | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
|------------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | | | | | |
| EF2520 (16 Tube) | 1.0" / DN25 | 60-80 | 3.0-5.0 | 1.0 | 0.6 | 2713 |
| EF2521 (26 Tube) | 1.5" / DN40 | 80-100 | 5.0-8.0 | 1.5 | 1 | 4900 |
| EF2522 (46 Tube) | 2.0" / DN50 | 80-150 | 10-15 | 1.8 | 1.2 | 6300 |
| EF2523 (65 Tube) | 3.0" / DN80 | 80-200 | 30-40 | 2.3 | 1.8 | 9000 |

(Stainless Steel 304/316)

Adjustable Frothy Cascade Jet Nozzle
Bubbles go along with the water column when the air is involved, it looks elegant when work with water screen, water bridge and other types of fountain. There's a sparepart at the bottom to make the nozzle adjustable.



Product Parameter

| Model Number | Connection Size (Inch/mm) | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | | | | |
| EF2530 | 1.5" / DN40 | 50-200 | 10-15 | 2-3 | 0.5 | 1230 |

(Stainless Steel 304/316)

Adjustable Frothy Cascade Jet Nozzle
Bubbles go along with the water column when the air is involved, it looks elegant when work with water screen, water bridge and other types of fountain. There's a sparepart at the bottom to make the nozzle adjustable.



Product Parameter

| Model Number | Connection Size (Inch/mm) | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | | | | |
| EF2531 | 1.5" / DN40 | 50-200 | 10-15 | 2-3 | 0.5 | 805 |

(Stainless Steel 304/316+Plastic)

Europe Style Ice Tower Cascade Jet Nozzle
Bubbles go along with the water column when the air is involved, it looks elegant when work with water screen, water bridge and other types of fountain.



Product Parameter

| Model Number | Connection Size (Inch/mm) | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | | | | |
| EF2532 | 1.5" / DN40 | 50-250 | 10-25 | 2-4 | 1 | 1389 |

(Stainless Steel 304/316)


Product Description

2. Classic and Ordinary Fountain Nozzle --- Stainless Steel 304/316 Material Fountain Nozzle

Fixed Jade Column Nozzle
When the water column sprays out, and flected by the sunshine, it's glittering and looks like a jade column.
It can be used as a dry land fountain and a water fountain.




Product Parameter

| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | Net Weight(g) |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | |
|  (Stainless Steel 304/316) | EF2540 | 0.5" / DN20 | 50-150 | 2.7-3.8 | 1.5-5.0 | 0.3-0.7 | 213 |
| | EF2541 | 1.0" / DN25 | 60-180 | 3.6-6.0 | 2.0-7.0 | 0.3-0.8 | 364 |
| | EF2542 | 1.5" / DN40 | 60-200 | 6.0-18 | 2.0-8.0 | 0.5-1.0 | 500 |
| | EF2543 | 2.0" / DN50 | 60-280 | 7.0-28 | 2.0-10.0 | 0.5-1.2 | 725 |

Jade Column Nozzle(Thin Tube)
When the water column sprays out, and flected by the sunshine, it's glittering and looks like a jade column.
It can be used as a dry land fountain and a water fountain.




Product Parameter

| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | Net Weight(g) |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | |
|  (Stainless Steel 304/316) | EF2550 | 1.0" / DN25 | 60-180 | 3.6-6.3 | 2.0-7.0 | 0.3-0.8 | 300 |
| | EF2551 | 1.5" / DN40 | 60-200 | 6.0-9.0 | 2.0-8.0 | 0.5-1.0 | 582 |


Mushroom Hemisphere Fountain Nozzle(Conjoined)
The characteristic of this nozzle is small sound, well-distributed water film, and little water consumption, so you need to adjust the valve to control the water flow and the cap on the top of the nozzle.




Product Parameter

| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | Est.Net Weight(g) |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | |
|  (Stainless Steel 304/316) | EF2560 | 0.5" / DN15 | 15-30 | 1.1 | 0.2 | 0.3 | 124 |
| | EF2561 | 3/4" / DN20 | 15-30 | 1.5 | 0.25 | 0.5 | 228 |
| | EF2562 | 1.0" / DN25 | 20-35 | 2 | 0.3 | 0.6 | 306 |
| | EF2563 | 1.5" / DN40 | 20-55 | 3 | 0.4 | 1 | 485 |

Trumpet Flower Morning Glory Bell Shaped Nozzle
When the water column is reflected, the thin film display a shape like a trumpet flower. You can adjust the valve and the cap on the top to control the water flow.



Product Parameter

| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | Net Weight(g) |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | |
|  (Stainless Steel 304/316) | EF2570 | 1/2" / DN15 | 15-30 | 1.1 | 0.2 | 0.3 | 124 |
| | EF2571 | 3/4" / DN20 | 15-30 | 1.5 | 0.25 | 0.5 | 228 |
| | EF2572 | 1.0" / DN25 | 20-35 | 2 | 0.3 | 0.6 | 306 |
| | EF2573 | 1.5" / DN40 | 20-55 | 3 | 0.4 | 1.0 | 485 |

Product Description



2. Classic and Ordinary Fountain Nozzle --- Stainless Steel 304/316 Material Fountain Nozzle

Trumpet Flower/Morning Glory/Bell Shaped Nozzle
(Special Designed)

When the water column is reflected, the thin film display a shape like a trumpet flower. You can adjust the valve and the cap on the top to control the water flow.



Product Parameter

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| EF2580 | 2.5" / DN65 | 50-200 | 11.5 | 2-4.2 | 2.5 | 2600 |


Special Rotating Flower Basket Fountain Nozzle
When the water sprays out, it's like a rotating flower basket, The force is made of centrifugal pull strength and reactive force of water flow, which make the nozzle rotate and spray at the same time.



Product Parameter

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
| EF2590 | 1.5" / DN40 | 150-450 | 29 | 2-5 | 3 | 4100 |
| EF2591 | 2.0" / DN50 | 150-500 | 38 | 2-6 | 3.5 | 4350 |
| EF2592 | 2.5" / DN65 | 150-850 | 47 | 2.5-8 | 4 | 5200 |


Special Designed Fan Shape Fountain Nozzle
When the water sprays out, it's like a fan, when combined with RGB lights, it seems like a peacock spreads its tail.
This nozzle is mainly matched with 1D, 2D or 3D programmable fountain head.



Product Parameter

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
| EF2600 | 2.0" / DN50 | 150-350 | 16.5 | 3-10 | 2 | 1156 |

Fixed Direct Spray Nozzle(Inner Screwed)
The direction is fixed, so it's mainly assembled with on One Axis or Two Axis fountain head, and display various of water types.

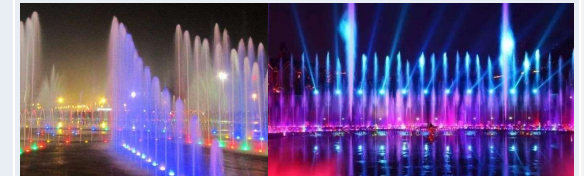

Product Parameter


| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
| EF2621 | 1.5" / DN40 | 150-300 | 5-10 | 3-8 | Radial | 394 |
| EF2623 | 2.0" / DN50 | 150-350 | 10-25 | 3-10 | Radial | 515 |


Product Description




2. Classic and Ordinary Fountain Nozzle --- Stainless Steel 304/316 Material Fountain Nozzle


Fixed Direct Spray Nozzle(Outer Screwed)
The direction is fixed, so it's mainly assembled with on One Axis or Two Axis fountain head, and display various of water types.




| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|-------------------------|---------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Net Weight(g) |
|  (Stainless Steel 304/316) | EF2620 | 1.5" / DN40 | 150-300 | 5-10 | 3-8 | Radial | 490 |
| | EF2622 | 2.0" / DN50 | 150-350 | 10-25 | 3-10 | Radial | 695 |
| | EF2624 | 2.0" / DN50 (Lengthed) | 150-400 | 10-25 | 3-12 | Radial | 965 |


Spiral/Helix Misting Fountain Nozzle
When water sprays out, it will be atomized and dispersed. It can work to dedust, and can also decorate the big fountain to display a magic and charming effect.




| | Model Number | Connection Size (mm) | Product Parameter | | | | |
|--|--------------|----------------------|------------------------|--------------------------|-----------------------|-------------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
|  (Stainless Steel 304/316) | EF5018-1 | φ 6.67 | | | | | 28 |
| | EF5018-2 | φ 10 | | | | | 36 |
| | EF5018-3 | φ 15 / (DN15) | | | | | 65 |
| | EF5018-4 | φ 20 / (DN20) | | | | | 133 |
| | EF5018-5 | φ 25 / (DN25) | | | | | 240 |
| | EF5018-6 | φ 32 | | | | | 240 |
| | EF5018-7 | φ 40 | | | | | / |
| | EF5018-8 | φ 50 | | | | | / |


Little Direct Spray Nozzle, with Valve
This kind of nozzle is mainly used in water curtain fountain.



| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|------------------------------|-------------------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Water Spray Diameter(m) | Est.Net Weight(g) |
|  (Stainless Steel 304/316) | EF-SL100 | M10 / DN8.5 | 50-100 | 0.1-0.5 | water sprays from up to down | | 40 |
| | EF-SL101 | M12 / DN10.2 | 50-100 | 0.1-0.5 | | | 60 |
| | EF-SL102 | M14 / DN11.9 | 50-100 | 0.3-1.5 | | | 75 |
| | EF-SL103 | M16 / DN13.9 | 50-150 | 1-3 | | | 90 |
| | EF-SL104 | 0.25" / DN40 | 50-150 | 2-4 | | | 530 |
| | EF-SL105 | 3/8" / DN50 | 50-200 | 5-8 | | | 750 |

Middle High Spray Fountain Nozzle
The water spray height can be from 20-120 meters after adjusting, it's a basic fountain for a middle or large size fountain.



| | Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--|--------------|---------------------------|------------------------|--------------------------|-----------------------|------------|-------------------|
| | | | Working Pressure (Kpa) | Flow (m ³ /h) | Water Spray Height(m) | Outlet(mm) | Est.Net Weight(g) |
|  (Stainless Steel 304/316) | EF2100 | 100 | 0.33-1.30 | 105-208 | 20-80 | 38 | 8800 |
| | EF2101 | 100 | 0.33-1.35 | 144-290 | 20-80 | 45 | |
| | EF2102 | 150 | 0.33-1.65 | 186-401 | 20-100 | 48 | 19200 |
| | EF2103 | 150 | 0.33-2.00 | 291-673 | 20-120 | 58 | |
| | | | | | | | |



1. AC110/220V Water Pump

We will suggest some models we often use in the next pages, If you need our product:

1. Tell us which model number, the quantity, the material(cast iron or stainless steel) you need for the product.
2. What's the voltage you can get, AC110V,220Vor 380V, and it's 50 or 60 Hz.
3. Tell us more specific details like, waterflow, head of delivery and the power, so that we can choose or design for you.
4. If you don't know how to assemble or install, we can offer technical help.

2. Low Voltage DC Water Pump


If you need our products, we need the following details:

1. Tell us which model number, the quantity, the material(plastic shell or stainless steel) you need for the product.
2. What's the voltage you will choose, DC12V, 24V, 36V or 48V.
3. Tell us more specific details like, waterflow, head of delivery and the power, so that we can choose or design for you.
4. If you don't know how to assemble or install, we can offer technical help.

Product Description



3. Fountain Pump --- AC110V, 220V or AC380V QSF & QSP Series Water Fountain Pump, Cast Iron and Stainless-Steel Material

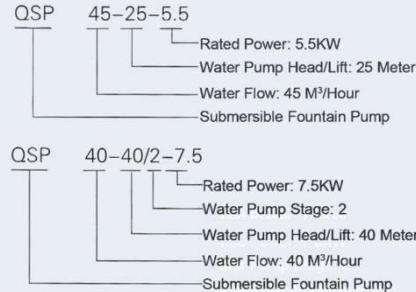

QSF Fountain Pump

QSP Fountain Pump

| Seq. | Model Number | Water Flow (m ³ /h) | Head/Lift (m) | Power (Kw) | Current (A) | Pump Stage | Pump Height (mm) | Outter Diameter (mm) | Net Weight (Kg) | Flange Outter Diameter(mm) | Centre Distance (mm) | Flange Inner Diameter(mm) |
|------|--------------------|--------------------------------|---------------|------------|-------------|------------|------------------|----------------------|-----------------|----------------------------|----------------------|---------------------------|
| 001 | QSP(F)-10-10-0.55 | 10 | 10 | 0.55 | 2.2 | 1 | 450 | 150 | 21 | 150 | 130 | 61 |
| 002 | QSP(F)-15-7-0.55 | 15 | 7 | 0.55 | | 1 | 450 | 150 | 21 | | | |
| 003 | QSP(F)-25-4.5-0.55 | 25 | 4.5 | 0.55 | | 1 | 450 | 150 | 21 | | | |
| 004 | QSP(F)-10-13-0.75 | 10 | 13 | 0.75 | 2.6 | 1 | 450 | 150 | 21 | | | |
| 005 | QSP(F)-15-10-0.75 | 15 | 10 | 0.75 | | 1 | 500 | 150 | 22 | | | |
| 006 | QSP(F)-25-6-0.75 | 25 | 6 | 0.75 | | 1 | 500 | 150 | 22 | | | |
| 007 | QSP(F)-6-8-0.75 | 6 | 8 | 0.75 | 3.2 | 1 | 500 | 150 | 22 | | | |
| 008 | QSP(F)-40-3.5-0.75 | 40 | 3.5 | 0.75 | | 1 | 500 | 150 | 22 | | | |
| 009 | QSP(F)-25-9-1.1 | 25 | 9 | 1.1 | | 1 | 500 | 150 | 24 | | | |
| 010 | QSP(F)-40-5.5-1.1 | 40 | 5.5 | 1.1 | 4.2 | 1 | 500 | 150 | 24 | | | |
| 011 | QSP(F)-10-18-1.1 | 10 | 18 | 1.1 | | 1 | 500 | 150 | 24 | | | |
| 012 | QSP(F)-15-14-1.1 | 15 | 14 | 1.1 | | 1 | 500 | 150 | 24 | | | |
| 013 | QSP(F)-25-12-1.5 | 25 | 12 | 1.5 | 6.1 | 1 | 500 | 170 | 27 | | | |
| 014 | QSP(F)-40-8-1.5 | 40 | 8 | 1.5 | | 1 | 600 | 150 | 27 | | | |
| 015 | QSP(F)-15-18-1.5 | 15 | 18 | 1.5 | | 1 | 560 | 160 | 41 | | | |
| 016 | QSP(F)-25-17-2.2 | 25 | 17 | 2.2 | 7.1 | 1 | 580 | 182 | 43 | | | |
| 017 | QSP(F)-65-7-2.2 | 65 | 7 | 2.2 | | 1 | 600 | 180 | 43 | | | |
| 018 | QSP(F)-15-26-2.2 | 15 | 26 | 2.2 | | 1 | 600 | 185 | 41 | | | |
| 019 | QSP(F)-20-20-2.2 | 20 | 20 | 2.2 | 7.1 | 1 | 600 | 200 | 43 | | | |
| 020 | QSP(F)-100-4.5-2.2 | 100 | 4.5 | 2.2 | | 1 | 553 | 160 | 42 | | | |
| 021 | QSP(F)-40-12-2.2 | 40 | 12 | 2.2 | | 1 | 553 | 160 | 42 | | | |
| 022 | QSP(F)-40-16-3 | 40 | 16 | 3 | 7.1 | 1 | 553 | 160 | 42 | | | |
| 023 | QSP(F)-65-10-3 | 65 | 10 | 3 | | 1 | 570 | 184 | 44 | | | |
| 024 | QSP(F)-25-24-3 | 25 | 24 | 3 | | 1 | 570 | 184 | 50 | | | |
| 025 | QSP(F)-100-6-3 | 100 | 6 | 3 | 7.1 | 1 | 553 | 168 | 42 | | | |
| 026 | QSP(F)-30-20-3 | 30 | 20 | 3 | | 1 | 575 | 168 | 44 | | | |
| 027 | QSP(F)-15-34/2-3 | 15 | 34 | 3 | | 2 | 720 | 168 | 50 | | | |
| 028 | QSP(F)-20-30/2-3 | 20 | 30 | 3 | 2 | 655 | 160 | 50 | | | | |

Product Description



3. Fountain Pump --- AC110V, 220V or AC380V QSF & QSP Series Water Fountain Pump, Cast Iron and Stainless-Steel Material

| | | | | | | | | | | | | | | |
|-----|---------------------|-----|------|-----|-----|------|-----|-----|-----|-----|-----|-----|-----|-----|
| 029 | QSP(F)-100-7-4 | 100 | 7 | 4 | 9.5 | 1 | 575 | 182 | 46 | 200 | 174 | 111 | | |
| 030 | QSP(F)-40-21-4 | 40 | 21 | 4 | | 1 | 616 | 184 | 46 | 150 | 130 | 61 | | |
| 031 | QSP(F)-65-13-4 | 65 | 13 | 4 | | 1 | 620 | 184 | 48 | 168 | 150 | 91 | | |
| 032 | QSP(F)-80-12-4 | 80 | 12 | 4 | | 1 | 620 | 184 | 48 | | | | | |
| 033 | QSP(F)-100-9-4 | 100 | 9 | 4 | | 1 | 610 | 180 | 50 | 200 | 174 | 110 | | |
| 034 | QSP(F)-20-40/2-4 | 20 | 40 | 4 | | 2 | 740 | 160 | 56 | 150 | 130 | 61 | | |
| 035 | QSP(F)-25-30/2-4 | 25 | 30 | 4 | | 2 | 740 | 160 | 56 | | | | | |
| 036 | QSP(F)-30-26/2-4 | 30 | 26 | 4 | | 2 | 740 | 160 | 56 | | | | | |
| 037 | QSP(F)-20-36/2-4 | 20 | 36 | 4 | | 2 | 740 | 160 | 56 | | | | | |
| 038 | QSP(F)-15-51/3-4 | 15 | 51 | 4 | | 3 | 800 | 220 | 62 | 168 | 150 | 91 | | |
| 039 | QSP(F)-45-25-5.5 | 45 | 25 | 5.5 | 1 | 636 | 210 | 57 | | | | | | |
| 040 | QSP(F)-40-28-5.5 | 40 | 28 | 5.5 | 1 | 636 | 210 | 57 | | | | | | |
| 041 | QSP(F)-65-18-5.5 | 65 | 18 | 5.5 | 1 | 636 | 210 | 57 | | | | | | |
| 042 | QSP(F)-40-30/2-5.5 | 40 | 30 | 5.5 | 2 | 750 | 184 | 62 | 150 | | | | 130 | 61 |
| 043 | QSP(F)-30-36/2-5.5 | 30 | 36 | 5.5 | 2 | 750 | 184 | 63 | | | | | | |
| 044 | QSP(F)-25-40/2-5.5 | 25 | 40 | 5.5 | 2 | 750 | 184 | 63 | | | | | | |
| 045 | QSP(F)-15-55/3-5.5 | 15 | 55 | 5.5 | 3 | 836 | 170 | 67 | 150 | | | | 130 | 61 |
| 046 | QSP(F)-160-8-5.5 | 160 | 8 | 5.5 | 1 | 660 | 220 | 59 | 200 | | | | 174 | 110 |
| 047 | QSP(F)-100-12-5.5 | 100 | 12 | 5.5 | 1 | 660 | 220 | 57 | | | | | | |
| 048 | QSP(F)-250-5-5.5 | 250 | 5 | 5.5 | 1 | 730 | 210 | 60 | 220 | 200 | 180 | | | |
| 049 | QSP(F)-65-25-7.5 | 65 | 25 | 7.5 | 1 | 696 | 210 | 67 | 168 | 150 | 91 | | | |
| 050 | QSP(F)-80-22-7.5 | 80 | 22 | 7.5 | 1 | 696 | 210 | 67 | | | | | | |
| 051 | QSP(F)-100-17-7.5 | 100 | 17 | 7.5 | 1 | 696 | 210 | 67 | 200 | 174 | 110 | | | |
| 052 | QSP(F)-160-11-7.5 | 160 | 11 | 7.5 | 1 | 696 | 210 | 70 | | | | | | |
| 053 | QSP(F)-250-6.7-7.5 | 250 | 6.7 | 7.5 | 2 | 910 | 210 | 77 | | | | | | |
| 054 | QSP(F)-40-38/2-7.5 | 40 | 38 | 7.5 | 2 | 825 | 184 | 75 | | | | 168 | 150 | 91 |
| 055 | QSP(F)-25-50/3-7.5 | 25 | 50 | 7.5 | 3 | 910 | 184 | 84 | | | | 150 | 130 | 61 |
| 056 | QSP(F)-50-36/3-7.5 | 50 | 36 | 7.5 | 3 | 968 | 184 | 85 | | | | 168 | 150 | 91 |
| 057 | QSP(F)-30-48/3-7.5 | 30 | 48 | 7.5 | 3 | 910 | 184 | 85 | | | | 150 | 130 | 61 |
| 058 | QSP(F)-20-72/3-7.5 | 20 | 72 | 7.5 | 3 | 928 | 184 | 88 | | | | | | |
| 059 | QSP(F)-250-8-9.2 | 250 | 8 | 9.2 | 1 | 800 | 210 | 78 | | | | 196 | 173 | 125 |
| 060 | QSP(F)-100-21-9.2 | 100 | 21 | 9.2 | 1 | 830 | 210 | 90 | | | | 200 | 174 | 110 |
| 061 | QSP(F)-160-12.5-9.2 | 160 | 12.5 | 9.2 | 1 | 830 | 210 | 88 | | | | | | |
| 062 | QSP(F)-25-60/3-9.2 | 25 | 60 | 9.2 | 3 | 1168 | 210 | 130 | 150 | 130 | 61 | | | |
| 063 | QSP(F)-40-45/3-9.2 | 40 | 45 | 9.2 | 3 | 1168 | 210 | 130 | | | | | | |
| 064 | QSP(F)-65-31/2-9.2 | 65 | 31 | 9.2 | 2 | 910 | 210 | 130 | 168 | 150 | 91 | | | |
| 065 | QSP(F)-80-33/2-11 | 80 | 33 | 11 | 2 | 1368 | 210 | 150 | | | | | | |
| 066 | QSP(F)-100-25/2-11 | 100 | 25 | 11 | 2 | 1368 | 210 | 150 | | | | | | |
| 067 | QSP(F)-160-15-11 | 160 | 15 | 11 | 1 | 968 | 210 | 140 | | | | | | |
| 068 | QSP(F)-250-9.5-11 | 250 | 9.5 | 11 | 1 | 968 | 210 | 140 | | | | | | |

Product Description



3. Fountain Pump --- AC110V, 220V or AC380V QJ Series Water Fountain Pump, Cast Iron and Stainless-Steel Material


| Seq. | Model Number | Water Flow (m ³ /h) | Head/Lift (m) | RPM (Round/Minute) | Efficiency (%) | Outer Diameter (mm) | Recommend Hole Diameter(mm) | Rated Power (Kw) | Rated Voltage(V) | Rated Current(A) | Maximum Radial Direction Size(mm) |
|--|--------------|--------------------------------|---------------|--------------------|----------------|---------------------|-----------------------------|------------------|------------------|------------------|-----------------------------------|
| <div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;"> <p>200 QJ 80 - 33</p> <p>Minimum Hole Diameter(mm) Pump Head/Lift: 33 Meter</p> <p>QJ Series Fountain Pump Water Flow: 80 M³/Hour</p> </div> <div style="text-align: center;"> </div> </div> | | | | | | | | | | | |
| 001 | 200QJ80-33 | 80 | 33 | 2875 | 76 | 80 | > 200 | 11 | 380V | 25.8 | 184 |
| 002 | 200QJ40-60 | 40 | 60 | 2875 | | | | 11 | | 25.8 | |
| 003 | 200QJ32-78 | 32 | 78 | 2875 | | | | 11 | | 25.8 | |
| 004 | 250QJ32-69 | | 69 | 2875 | 11 | | 25.8 | | | | |
| 005 | 250QJ32-92 | 40 | 92 | 2875 | 66 | | > 250 | 15 | | 33.9 | |
| 006 | 250QJ40-66 | | 66 | 2875 | 13 | | | 25.8 | | | |
| 007 | 250QJ40-78 | | 78 | 2875 | 15 | | | 33.9 | | | |
| 008 | 250QJ40-88 | | 88 | 2875 | 18.5 | | | 40.8 | | | |
| 009 | 250QJ40-110 | 50 | 110 | 2875 | 70 | | | 380V | | 22 | 50.6 |
| 010 | 250QJ50-55 | | 55 | 2875 | 13 | | | | | 25.8 | |
| 011 | 250QJ50-60 | | 60 | 2875 | 15 | 33.9 | | | | | |
| 012 | 250QJ50-80 | | 80 | 2875 | 18.5 | 40.8 | | | | | |
| 013 | 250QJ50-100 | | 100 | 2875 | 22 | 50.6 | | | | | |
| 014 | 250QJ50-120 | | 120 | 2875 | 30 | 58 | | | | | |
| 015 | 250QJ50-160 | 63 | 160 | 2875 | 72 | 236 | 37 | | 86 | | |
| 016 | 250QJ63-60 | | 60 | 2875 | 18.5 | | 40.8 | | | | |
| 017 | 250QJ63-80 | | 80 | 2875 | 22 | | 46 | | | | |
| 018 | 250QJ63-100 | | 100 | 2875 | 30 | | 58 | | | | |
| 019 | 250QJ63-120 | | 120 | 2875 | 37 | | 68 | | | | |
| 020 | 250QJ63-200 | | 200 | 2875 | 45 | | 85 | | | | |
| 021 | 250QJ63-160 | | 160 | 2875 | 55 | | 105 | | | | |
| 022 | 250QJ63-220 | | 220 | 2875 | 63 | | 120 | | | | |
| 023 | 250QJ63-260 | 260 | 2875 | 75 | 130 | | | | | | |
| | | | | | 74 | | 100 | | | | |

Product Description



3. Fountain Pump --- DC12V, 24V, 36V, 48V Low Voltage Water Fountain Pump, Stainless-Steel Material

EF · 4 SP 5 - 2 - 9 /400

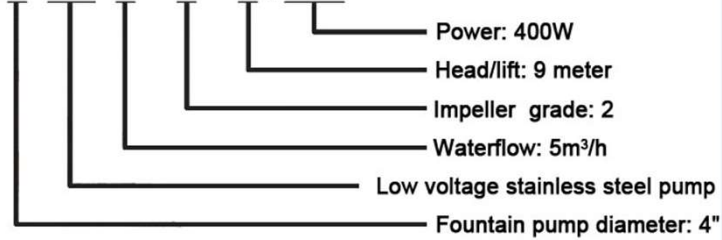

| Seq. | Model Number | Pumping Set Distribution Power(W) | Motor Power(W) | Switch Power Supply(V) | Driverboard Output Voltage(V) | Water Flow (m ³ /h) | Head/Lift (Meter) | Revolving Speed (r/min) |
|------|--------------------|-----------------------------------|----------------|------------------------|-------------------------------|--------------------------------|-------------------|-------------------------|
| 001 | EF-4SP5-1-5/200 | 20-250 | 250 | DC24(21-36) | DC24V (36-48) | 4 | 5 | 3000 |
| 002 | EF-4SP5-2-9/400 | 20-400 | 400 | | | 5 | 9 | |
| 003 | EF-4SP5-3-13/600 | 20-600 | 600 | DC36(36-48) | | 5 | 13 | |
| 004 | EF-4SP8-1-5/400 | 20-400 | 400 | DC24(21-36) | | 8 | 5 | |
| 005 | EF-4SP8-2-9/600 | 20-750 | 750 | DC36(36-48) | | 8 | 9 | |
| 006 | EF-4SP8-3-13/1100 | 20-1100 | 1100 | | | 8 | 13 | |
| 007 | EF-4SP8-4-18/1600 | 20-1600 | 1600 | DC48(42-68) | | 8 | 18 | |
| 008 | EF-5SP10-2-12/1100 | 20-1100 | 1100 | DC36(36-48) | | 10 | 12 | |
| 009 | EF-5SP10-3-18/1600 | 20-1600 | 1600 | DC48(42-68) | | 10 | 18 | |
| 010 | EF-4SP14-1-5/600 | 20-600 | 600 | DC24(21-36) | | 14 | 5 | |
| 011 | EF-4SP14-2-9/1100 | 20-1100 | 1100 | DC36(36-48) | | 14 | 9 | |
| 012 | EF-4SP14-3-14/1600 | 20-1600 | 1600 | DC48(42-68) | | 14 | 14 | |
| 013 | EF-6SP20-1-8/1600 | 20-1600 | 1600 | | | 20 | 18 | |

Product Description



3. Fountain Pump --- DC12V 24V Low Voltage Water Fountain Pump, Material: PA66+30%GF (Changeable)




| Seq. | Model Number | Power(W) | Lift(Meter) | Voltage (V) | Water Flow (m ³ /h) | Remark |
|------|--------------------|----------|-------------|-------------|--------------------------------|--|
| 001 | EFDC60E-24120S-1 | 100 | 12 | DC24V | 3.8 | 1. S means speed not controlled. 2. A means speed controlled. 3. DMX means DMX512 Controlled. |
| 002 | EFDC80E-2475S-1 | 100 | 7.5 | | 7 | |
| 003 | EFDC80E-24100S-1 | 150 | 10 | | 8 | |
| 004 | EFDC85E-2475S-1 | 150 | 7.5 | | 12 | |
| 005 | EFDC85E-24100S | 200 | 10 | | 13 | |
| 006 | EFDC60E-24120A-1 | 100 | 12 | | 3.8 | |
| 007 | EFDC80E-2475A-1 | 100 | 7.5 | | 7 | |
| 008 | EFDC80E-24100A-1 | 150 | 10 | | 8 | |
| 009 | EFDC85E-2475A | 100 | 7.5 | | 12 | |
| 010 | EFDC85E-24100A | 200 | 10 | | 13 | |
| 011 | EFDC60E-24120DMX | 100 | 12 | | 3.8 | |
| 012 | EFDC80E-24110DMX-1 | 100 | 7.5 | | 7 | |
| 013 | EFDC80E-24100DMX-1 | 150 | 10 | | 8 | |
| 014 | EFDC85E-2475DMX | 150 | 7.5 | | 12 | |
| 015 | EFDC85E-24100DMX | 200 | 10 | | 13 | |

Product Description



3. Fountain Pump --- QZ, QH Series Water Pump, Cast Iron Material

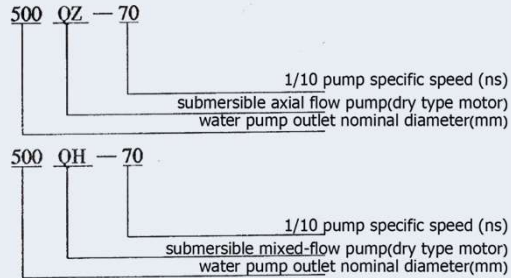

| Model Number | ΦD | H | H1 | ΦM | Φd |
|--------------|------|------|------|------|-----|
| 350QZ-70 | 500 | 1000 | 500 | 550 | 290 |
| 500QZ-70 | 700 | 2215 | 615 | 770 | 392 |
| 500QZ-100 | 700 | 2223 | 623 | 770 | |
| 500QZ-155 | 700 | 2265 | 665 | 770 | |
| 700QZ-60 | 920 | 2510 | 896 | 980 | 544 |
| 700QZ-70 | 920 | 2510 | 896 | 980 | |
| 700QZ-100 | 920 | 2510 | 896 | 980 | |
| 700QZ-125 | 920 | 2510 | 896 | 980 | |
| 900QZ-70A | 1200 | 3500 | 1236 | 1280 | 772 |
| 900QZ-70 | 1200 | 3500 | 1236 | 1280 | |
| 900QZ-100 | 1200 | 3500 | 1236 | 1280 | |
| 900QZ-125 | 1200 | 3500 | 1236 | 1280 | |
| 500QH-50A | 700 | 2305 | 910 | 770 | 392 |
| 500QH-50 | 700 | 2305 | 910 | 770 | |
| 600QH-50A | 830 | 2400 | 1150 | 980 | 544 |
| 600QH-50 | 830 | 2400 | 1150 | 980 | |
| 700QH-50A | 920 | 2750 | 1153 | 980 | |
| 700QH-50 | 920 | 2750 | 1153 | 980 | |
| 900QH-50A | 1200 | 3800 | 1780 | 1360 | 772 |
| 900QH-50 | 1200 | 3800 | 1780 | 1360 | |



4. Fountain Valve --- Foreword

1. Ball Valve & Nozzle Connector

We will suggest some models we often use in the next pages, If you need our product:

1. Tell us which model number, the quantity, the material(brass type or stainless steel) you need for the product.
2. Better show us a specific drawing about the ball valve.
3. If you need the nozzle connector, tell us more specific details about the connection size of the nozzle.

2. Solenoid Valve


If you need our products, we need the following details:

1. Tell us which model number, the quantity, the material(brass type or stainless steel) you need for the product.
2. Better show us a specific drawing about the Port Size and the Orifica Size of the solenoid valve.
3. Tell us what's the voltage you use, AC220V-230V, 50-60HZ, AC100V-120V, 60HZ or DC12V-24V.

Product Description



4. Fountain Valve --- Ball Valve and Fountain Nozzle Connector, Brass Chrome-plated Material



| Name of Parts | Material | Name of Parts | Material |
|-----------------------|--------------------------|-----------------------|--------------------------|
| 1 - Ball Valve Body | Brass | 6 - Ball Valve Gland | PTFE, RPTFE, PPL, NBR... |
| 2 - Ball Valve Bonnet | Brass | 7 - Pressing Nut | Brass |
| 3 - Ball Valve Seat | PTFE, RPTFE, PPL, NBR... | 8 - Ball Valve Handle | Brass |
| 4 - Ball | Brass | 9 - Ball Valve Nut | Brass |
| 5 - Ball Valve Stem | Brass | | |



(Brass, Chrome Plated)

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | |
|--------------|---------------------------|-------------------|-----|-----|-----|
| | | D | A | H | L |
| EFBVS-06 | 1/4" / DN6 | 8 | 84 | 44 | 40 |
| EFBVS-09 | 3/8" / DN9 | 10 | 84 | 46 | 44 |
| EFBVS-15 | 1/2" / DN15 | 13.5 | 84 | 48 | 47 |
| EFBVS-20 | 3/4" / DN20 | 18.5 | 84 | 52 | 54 |
| EFBVS-25 | 1.0" / DN25 | 23 | 112 | 67 | 65 |
| EFBVS-32 | 1 1/4" / DN32 | 29 | 135 | 76 | 73 |
| EFBVS-40 | 1 1/2" / DN40 | 37 | 135 | 81 | 81 |
| EFBVS-50 | 2.0" / DN50 | 47 | 157 | 99 | 98 |
| EFBVS-65 | 2 1/2" / DN65 | 64 | 236 | 131 | 135 |
| EFBVS-80 | 3.0" / DN80 | 75 | 236 | 138 | 150 |
| EFBVS-100 | 4.0" / DN100 | 97 | 236 | 158 | 176 |

Fountain Nozzle Connector, Single Screw
This is the connector for fountain nozzle.



(Chromium-plated Brass)

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--------------|---------------------------|------------------------|--------------------------|------------|-------------------------|--------------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Height(mm) | Water Spray Diameter(m) | Est. Net Weight(g) |
| EF1730 | 3/4" / DN20 | | | 60 | | 146 |
| EF1731 | 1.0" / DN25 | | | 68 | | 200 |
| EF1732 | 1.5" / DN40 | | | 72 | | 370 |
| EF1733 | 2.0" / DN50 | | | 75 | | 500 |
| EF1734 | 2.5" / DN65 | | | 120 | | 1600 |
| EF1735 | 3.0" / DN80 | | | 132 | | 1900 |

Fountain Nozzle Connector, Dual Screw
This is the connector for fountain nozzle.



(Chromium-plated Brass)

| Model Number | Connection Size (Inch/mm) | Product Parameter | | | | |
|--------------|---------------------------|------------------------|--------------------------|------------|-------------------------|--------------------|
| | | Working Pressure (Kpa) | Flow (m ³ /h) | Height(mm) | Water Spray Diameter(m) | Est. Net Weight(g) |
| EF1740 | 1/2" / DN15 | | | 28 | | 25 |
| EF1741 | 3/4" / DN20 | | | 31 | | 40 |
| EF1742 | 1.0" / DN25 | | | 36 | | 68 |
| EF1743 | 1.5" / DN40 | | | 52 | | 250 |
| EF1744 | 2.0" / DN50 | | | 58 | | 400 |
| EF1745 | 2.5" / DN65 | | | 80 | | 620 |
| EF1746 | 3.0" / DN80 | | | / | | / |

Product Description




4. Fountain Valve --- Ball Valve, Stainless Steel Material

| | | Stainless Steel 201/304/316 Ball Valve | | | | |
|--------------------------------------|--------------|--|-----------------------------|-----------------------|-----------------------------|-----|
| | | Name of Parts | Material | Name of Parts | Material | |
| | | 1 - Ball Valve Body | Stainless Steel 201,304,316 | 6 - Ball Valve Gland | PTFE, RPTFE, PPL, NBR... | |
| | | 2 - Ball Valve Bonnet | | 7 - Pressing Nut | | |
| | | 3 - Ball Valve Seat | PTFE, RPTFE, PPL, NBR... | 8 - Ball Valve Handle | Stainless Steel 201,304,316 | |
| | | 4 - Ball | | 9 - Ball Valve Nut | | |
| | | 5 - Ball Valve Stem | Stainless Steel 201,304,316 | | | |
| <p>(Stainless Steel 201,304,316)</p> | Model Number | Connection Size (Inch/mm) | Product Parameter | | | |
| | | | D | A | H | L |
| | EFBVS-06 | 1/4" / DN6 | 8 | 84 | 44 | 40 |
| | EFBVS-09 | 3/8" / DN9 | 10 | 84 | 46 | 44 |
| | EFBVS-15 | 1/2" / DN15 | 13.5 | 84 | 48 | 47 |
| | EFBVS-20 | 3/4" / DN20 | 18.5 | 84 | 52 | 54 |
| | EFBVS-25 | 1.0" / DN25 | 23 | 112 | 67 | 65 |
| | EFBVS-32 | 1 1/4" / DN32 | 29 | 135 | 76 | 73 |
| | EFBVS-40 | 1 1/2" / DN40 | 37 | 135 | 81 | 81 |
| | EFBVS-50 | 2.0" / DN50 | 47 | 157 | 99 | 98 |
| | EFBVS-65 | 2 1/2" / DN65 | 64 | 236 | 131 | 135 |
| | EFBVS-80 | 3.0" / DN80 | 75 | 236 | 138 | 150 |
| | EFBVS-100 | 4.0" / DN100 | 97 | 236 | 158 | 176 |

Product Description




4. Fountain Valve --- Solenoid Valve, Brass Chrome-plated Material

| Product Photo | Model Number | Length(mm) | Height(mm) | Port Size(Inch) | Orifica Size | Net Weight(Kg) |
|---|--|-------------------|------------|-----------------|--------------|----------------|
|  | EFDF-15-42 | 69 | 117 | G1/2' | DN15 | 0.9 |
| | EFDF-20-52 | 73 | 123.5 | G3/4" | DN20 | 1 |
| | EFDF-25-62 | 99 | 134.5 | G1.0" | DN25 | 1.5 |
| | EFDF-32-72 | 112 | 172 | G1 1/4" | DN32 | 2 |
| | EFDF-40-82 | 123 | 172 | G1 1/2" | DN40 | 2.4 |
| | EFDF-50-92 | 168 | 209 | G2.0" | DN50 | 4.1 |
| Product Description | | | | | | |
| Solenoid Valve Material | Brass | | | | | |
| Sealing Material | NBR | | | | | |
| Working Temperature | -10°C - +80°C | | | | | |
| Insulation Grade | H | | | | | |
| Voltage | AC220V-230V, 50-60HZ | AC100V-120V, 60HZ | | | DC12V-24V | |
| Power | 22VA(Power=Voltage*Current) | 22VA | | | 20W | |
| Coil Model Number | S14/S24/S34/S44 (Down-lead cable length: 90cm) | | | | | |
| Installation | Install Based on Valve Body Flow Direction. We Suggest Level-Up Installation to Make the Lifespan Longer. | | | | | |
| Connection | Standard is G. We Can Also Accept NPT and Other Thread Specification. | | | | | |
| Voltage Fluctuation | ± 10% | | | | | |
| Waterproof Grade | IP68 | | | | | |
| Product Feature | | | | | | |
| Feature 1 | 2 Position 2 Way, Directly Operated Type, Normally Closed | | | | | |
| Feature 2 | Working Pressure: 0 - 5 Bar | | | | | |
| Feature 3 | Water Flow Orifice Size: DN15-DN150 (DN50-150, Material Must Be Stainless Steel or Cast Iron) | | | | | |
| Feature 4 | Detachable and Maintainable | | | | | |
| Feature 5 | Sealing Material: NBR, EPDM, FPM | | | | | |
| Feature 6 | Suitable for Water Scape, Music Fountain and Other Field | | | | | |
| Feature 7 | Standard Waterproof Will Be Offered | | | | | |

Product Description




4. Fountain Valve --- Solenoid Valve, Stainless Steel Material

| Product Photo | Model Number | Length(mm) | Height(mm) | Port Size(Inch) | Orifica Size | Net Weight(Kg) |
|---|--|------------|-------------------|-----------------|--------------|----------------|
|  | EFDf-15-41 | 69 | 117 | G1/2' | DN15 | 1 |
| | EFDf-20-51 | 73 | 123.5 | G3/4" | DN20 | 1.1 |
| | EFDf-25-61 | 99 | 134.5 | G1.0" | DN25 | 1.6 |
| | EFDf-32-71 | 112 | 172 | G1 1/4" | DN32 | 2.1 |
| | EFDf-40-81 | 123 | 172 | G1 1/2" | DN40 | 2.5 |
| | EFDf-50-91 | 168 | 209 | G2.0" | DN50 | 4.2 |
| Product Description | | | | | | |
| Solenoid Valve Material | Stainless Steel | | | | | |
| Sealing Material | NBR | | | | | |
| Working Temperature | -10°C - +80°C | | | | | |
| Insulation Grade | H | | | | | |
| Voltage | AC220V-230V, 50-60HZ | | AC100V-120V, 60HZ | | DC12V-24V | |
| Power | 22VA(Power=Voltage*Current) | | 22VA | | 20W | |
| Coil Model Number | S14/S24/S34/S44 (Down-lead cable length: 90cm) | | | | | |
| Installation | Install Based on Valve Body Flow Direction. We Suggest Level-Up Installation to Make the Lifespan Longer. | | | | | |
| Connection | Standard is G. We Can Also Accept NPT and Other Thread Specification. | | | | | |
| Voltage Fluctuation | ± 10% | | | | | |
| Waterproof Grade | IP68 | | | | | |
| Product Feature | | | | | | |
| Feature 1 | 2 Position 2 Way, Directly Operated Type, Normally Closed | | | | | |
| Feature 2 | Working Pressure: 0 - 5 Bar | | | | | |
| Feature 3 | Water Flow Orifice Size: DN15-DN150 (DN50-150, Material Must Be Stainless Steel or Cast Iron) | | | | | |
| Feature 4 | Detachable and Maintainable | | | | | |
| Feature 5 | Sealing Material: NBR, EPDM, FPM | | | | | |
| Feature 6 | Suitable for Water Scape, Music Fountain and Other Field | | | | | |
| Feature 7 | Standard Waterproof Will Be Offered | | | | | |

Product Description



4. Fountain Valve --- Solenoid Valve, Stainless Steel Material

| Product Photo | Model Number | Length(mm) | Width(mm) | Height(mm) | Inlet Size | Outlet Size | Net Weight |
|---|--|------------|-----------|------------|------------|-------------|------------|
|  | EFDf-09-51Q-BA12-DC24V | 115 | 105 | 90 | 20 mm | 5.5 mm | 2.0 Kg |
| Product Description | | | | | | | |
| Solenoid Valve Material | Chromium-plated Brass | | | | | | |
| Sealing Material | Silicone | | | | | | |
| Fluid Temperature | -20°C - +80°C | | | | | | |
| Working Temperature | -20°C - +50°C | | | | | | |
| Insulation Grade | H | | | | | | |
| Voltage | DC24 V | | | | | | |
| Current | 0.42 A | | | | | | |
| Power of Coil | 10 W | | | | | | |
| Coil Model Number | S14/S24/S34/S44 (Down-lead cable length: 90cm) | | | | | | |
| Installation | Install Based on Valve Body Flow Direction. We Suggest Level-Up Installation to Make the Lifespan Longer. | | | | | | |
| Connection | Standard is G. We Can Also Accept NPT and Other Thread Specification. | | | | | | |
| Voltage Fluctuation | ± 10% | | | | | | |
| Waterproof Grade | IP65 | | | | | | |

Product Description

5. Fountain Lamp --- Main Type and Foreword



G Series

GK Series

GMK,GMKH Series

ZK Series

ZMK ZMKH Series

GM Series

Stainless Steel304/316
Underwater Fountain Lamp

Stainless Steel304/316
Central Hole Water Fountain Lamp

Stainless Steel304/316
Central Hole Dry Fountain Lamp

Cast Aluminum Central Hole
Water Fountain Lamp

Cast Aluminum Central Hole
Dry Fountain Lamp


Stainless Steel304/316
Underground Lamp and Swimming Pool Light

We need the following details to quickly pick out the fountain lamps you need:

1. Tell us what's the lamp is used for, for underwater fountain, dry land fountain or swimming pool.
2. The voltage you can get is AC12V or others, if you don't have voltage transformer(for example, transform from AC220V to AC12V), we will offer one for you.
3. Better show us the photo or the drawing about the lamp, so that we can make the best suggestion for you.

For G Series Fountain Lamp, there are 5 types of bracket for your choice.


Bracket Type

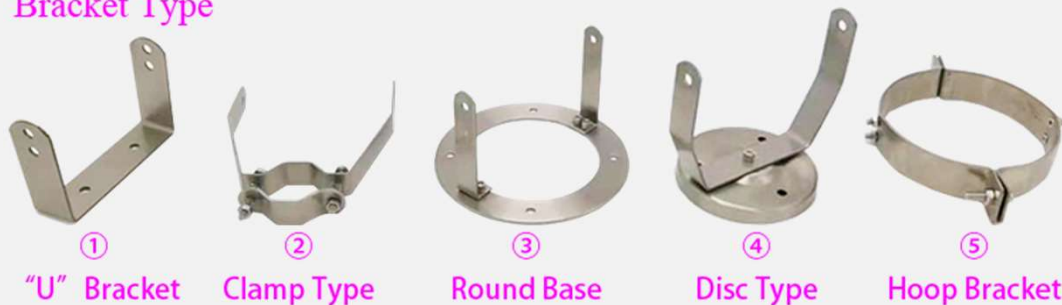

Product Description



5. Fountain Lamp --- G Series Stainless Steel 304/316 Underwater Fountain Lamp --- Customized



EF145G(Disc Type, Clamp Type)
Technical Parameter

| Model Number | Rated Power(W) | Voltage | Dimension(mm) | Reference N.W(Kg) | Material |
|--------------|----------------|----------------------------|---------------|-------------------|-------------------------|
| EF145G-6*1W | 6 | AC/DC12V, AC/DC24V, AC220V | Ø145*145 | 1.2 | Stainless Steel 304/316 |
| EF145G-9*1W | 9 | | | | |
| EF145G-12*1W | 12 | AC/DC24V, AC220V | Ø145*145 | 1.2 | Stainless Steel 304/316 |
| EF145G-4*3W | 12 | | | | |
| EF145G-6*3W | 18 | | | | |
| EF145G-9*3W | 27 | | | | |

Other Available Size for your choice

| Model Number | Rated Power(W) | Voltage | Dimension(mm) | Reference N.W(Kg) | Material |
|--------------|----------------|------------------|--|-------------------|-------------------------|
| EF170G-12*1W | 12 | AC/DC24V, AC220V | Ø170 (Clamp Type) | 2.0 | Stainless Steel 304/316 |
| EF170G-15*1W | 15 | | | | |
| EF170G-18*1W | 18 | | | | |
| EF170G-12*3W | 36 | AC/DC24V, AC220V | Ø190*190 (Clamp Type) Ø190*140 (Hollow Round-base) Ø190*160 (Disc Type) | 2.1 | Stainless Steel 304/316 |
| EF190G-18*1W | 18 | | | | |
| EF190G-24*1W | 24 | | | | |
| EF190G-9*3W | 27 | | | | |
| EF190G-6*4W | 24 | | | | |
| EF190G-12*3W | 36 | | | | |
| EF190G-18*3W | 54 | | | | |



Product Description

| | |
|----------------------------|---|
| Beam Angle | Standard beam angle is 30°. You can also make 10°, 60°, 90° or 120° as your choice. |
| Available Color | Red, Yellow, Green, Blue, White, Warm White, RGB |
| Lifespan | 50,000 Hours, L70@25°C |
| Control Method | Single Color, Auto RGB Color Change(Internal Control), RGB 4 Wires Color Change with Remote(External Control), DMX512 Control |
| Installation Method | Clamp Type, Disc Type, U-Shaped Bracket, Hollow Round-base, Optional |
| Main Material | Stainless steel 304/316, High light transmission tempered glass, Anti-aging silicone sealing ring. |
| Cable | Special underwater waterproof cable, 1 meter. |
| Working Temperature | -40°C ~~~ +45°C |
| Storage Temperature | -40°C ~~~ +70°C |
| Certification | CE, RoHS, ISO9001, IP68 |
| Waterproof Level | IP68 |

Product Description



5. Fountain Lamp --- GK Series Stainless Steel304/316 Central Hole Water Fountain Lamp --- Customized



EF145GK

Technical Parameter

| Model Number | Rated Power(W) | Voltage | Dimension(mm) | Central Hole Diameter (mm) | Reference N.W(Kg) | Material |
|--------------|----------------|---------------------|---------------|----------------------------|-------------------|-------------------------|
| EF145GK-6*1W | 6 | AC/DC12V, AC/DC24V, | Ø145*80 | 32 | 1.2 | Stainless Steel 304/316 |
| EF145GK-9*1W | 9 | AC220V | | | | |
| EF145GK-6*3W | 18 | AC/DC24V, AC220V | | | | |
| EF145GK-9*3W | 27 | AC/DC24V | | | | |

Other Available Size for your choice

| Model Number | Rated Power(W) | Voltage | Dimension(mm) | Central Hole Diameter (mm) | Reference N.W(Kg) | Material |
|---------------|----------------|---------------------|---------------|----------------------------|-------------------|-------------------------|
| EF170GK-6*1W | 6 | AC/DC12V, AC/DC24V, | Ø170*80 | 42 | 1.8 | Stainless Steel 304/316 |
| EF170GK-9*1W | 9 | AC220V | | | | |
| EF170GK-12*1W | 12 | AC/DC24V, AC220V | | | | |
| EF170GK-6*3W | 18 | | | | | |
| EF170GK-9*3W | 27 | AC/DC24V | | | | |
| EF170GK-12*3W | 36 | AC/DC24V, AC220V | | | | |
| EF190GK-9*1W | 9 | AC/DC12V, AC/DC24V, | Ø190*80 | 42 | 3.0 | |
| EF190GK-12*1W | 12 | AC/DC24V, AC220V | | | | |
| EF190GK-6*3W | 18 | | | | | |
| EF190GK-9*3W | 27 | AC/DC24V, AC220V | Ø250*80 | 50 / 65 / 80 | 5.3 | |
| EF190GK-12*3W | 36 | | | | | |
| EF250GK-18*1W | 18 | | | | | |
| EF250GK-24*1W | 24 | | | | | |
| EF250GK-18*3W | 54 | | | | | |


Product Description

| | |
|----------------------------|---|
| Beam Angle | Standard beam angle is 30°. You can also make 10°, 60°, 90° or 120° as your choice. |
| Available Color | Red, Yellow, Green, Blue, White, Warm White, RGB, DMX512 Control |
| Lifespan | 50,000 Hours, L70@25°C |
| Control Method | Single Color, Auto RGB Color Change(Internal Control), RGB 4 Wires Color Change with Remote(External Control), DMX512 Control |
| Main Material | Stainless steel 304/316, High light transmission tempered glass, Anti-aging silicone sealing ring. |
| Cable | Special underwater waterproof cable, 1 meter. |
| Working Temperature | -40°C ~~~ +45°C |
| Storage Temperature | -40°C ~~~ +70°C |
| Certification | CE, RoHS, ISO9001, IP68 |
| Waterproof Level | IP68 |

Product Description



5. Fountain Lamp --- GMK Series Stainless Steel304/316 Central Hole Dry Fountain Lamp --- Customized

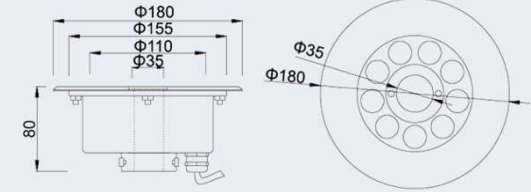

EF180GMK

Technical Parameter

| Model Number | Rated Power(W) | Voltage | Dimension(mm) | Central Hole Diameter(mm) | Recommend Cut Size(mm) | Reference N.W(Kg) | Material |
|---------------|----------------|----------------------------|---------------|---------------------------|------------------------|-------------------|-------------------------|
| EF180GMK-6*1W | 6 | AC/DC12V, AC/DC24V, AC220V | Ø180*80 | 35 | Ø160 | 2 | Stainless Steel 304/316 |
| EF180GMK-9*1W | 9 | | | | | | |
| EF180GMK-6*3W | 18 | AC/DC24V, AC220V | | | | | |

Other Available Size for your choice


| Model Number | Rated Power(W) | Voltage | Dimension(mm) | Central Hole Diameter(mm) | Recommend Cut Size(mm) | Reference N.W(Kg) | Material |
|----------------|----------------|----------------------------|---------------|---------------------------|------------------------|-------------------|-------------------------|
| EF150GMK-3*1W | 6 | AC/DC12V, AC/DC24V, AC220V | Ø150*80 | 25 | Ø135 | 1.5 | Stainless Steel 304/316 |
| EF150GMK-6*1W | 9 | | | | | | |
| EF165GMK-6*1W | 6 | AC/DC12V, AC/DC24V, AC220V | Ø165*80 | 32 | 150 | 2.0 | |
| EF165GMK-9*1W | 9 | | | | | | |
| EF165GMK-6*3W | 18 | AC/DC12V, AC/DC24V, AC220V | Ø200*80 | 42 | Ø180 | 2.5 | |
| EF200GMK-6*1W | 6 | | | | | | |
| EF200GMK-9*1W | 9 | | | | | | |
| EF200GMK-12*1W | 12 | AC/DC24V, AC220V | Ø200*80 | 50 | Ø180 | 2.5 | |
| EF200GMK-6*3W | 18 | | | | | | |
| EF200GMK-9*3W | 27 | AC/DC12V, AC/DC24V, AC220V | Ø220*80 | 42 | Ø200 | 3.0 | |
| EF220GMK-6*1W | 6 | | | | | | |
| EF220GMK-9*1W | 9 | AC/DC24V, AC220V | Ø220*80 | 50 | Ø200 | 3.0 | |
| EF220GMK-12*1W | 12 | | | | | | |
| EF220GMK-9*3W | 27 | AC/DC24V, AC220V | Ø220*80 | 65 | Ø200 | 3.0 | |
| EF220GMK-12*3W | 36 | | | | | | |

Product Description

| | |
|----------------------------|---|
| Beam Angle | Standard beam angle is 30°. You can also make 10°, 60°, 90° or 120° as your choice. |
| Available Color | Red, Yellow, Green, Blue, White, Warm White, RGB, DMX512 Control |
| Lifespan | 50,000 Hours, L70@25°C |
| Control Method | Single Color, Auto RGB Color Change(Internal Control), RGB 4 Wires Color Change with Remote(External Control), DMX512 Control |
| Main Material | Stainless steel 304/316, High light transmission tempered glass, Anti-aging silicone sealing ring. |
| Cable | Special underwater waterproof cable, 1 meter. |
| Working Temperature | -40°C ~~~ +45°C |
| Storage Temperature | -40°C ~~~ +70°C |
| Certification | CE, RoHS, ISO9001, IP68 |
| Waterproof Level | IP68 |

Product Description

5. Fountain Lamp --- GMKH Series Stainless Steel304/316 Central Hole Dry Fountain Lamp --- Customized



EF220GMKH

Technical Parameter

| Model Number | Rated Power(W) | Voltage | Dimension(mm) | Central Hole Diameter(mm) | Recommend Cut Size(mm) | Reference N.W(Kg) | Material |
|----------------|----------------|----------------------------|---------------|---------------------------|------------------------|-------------------|-------------------------|
| EF220GMKH-6*1W | 6 | AC/DC12V, AC/DC24V, AC220V | Ø220*80 | 32 | Ø180 | 2.5 | Stainless Steel 304/316 |
| EF220GMKH-9*1W | 9 | | | 35 | Ø190 | | |
| EF220GMKH-6*3W | 18 | AC/DC24V, AC220V | Ø220*80 | 35 | Ø190 | 2.5 | Stainless Steel 304/316 |
| EF220GMKH-6*1W | 6 | AC/DC12V, AC/DC24V, AC220V | | | | | |
| EF220GMKH-9*1W | 9 | AC/DC12V, AC/DC24V, AC220V | Ø220*80 | 35 | Ø190 | 2.5 | Stainless Steel 304/316 |
| EF220GMKH-6*1W | 6 | AC/DC12V, AC/DC24V, AC220V | | | | | |

Other Available Size for your choice

| Model Number | Rated Power(W) | Voltage | Dimension(mm) | Central Hole Diameter(mm) | Recommend Cut Size(mm) | Reference N.W(Kg) | Material |
|-----------------|----------------|----------------------------|---------------|---------------------------|------------------------|-------------------|-------------------------|
| EF230GMKH-6*1W | 6 | AC/DC12V, AC/DC24V, AC220V | Ø230*80 | 42 | Ø200 | 3.0 | Stainless Steel 304/316 |
| EF230GMKH-9*1W | 9 | | | 50 | | | |
| EF230GMKH-12*1W | 12 | AC/DC24V, AC220V | Ø230*80 | 42 | Ø200 | 3.0 | Stainless Steel 304/316 |
| EF230GMKH-6*3W | 18 | | | 50 | | | |
| EF230GMKH-9*3W | 27 | AC/DC12V, AC/DC24V, AC220V | Ø270*80 | 42 | Ø230 | 4 | Stainless Steel 304/316 |
| EF270GMKH-6*1W | 6 | | | 50 | | | |
| EF270GMKH-9*1W | 9 | AC/DC24V, AC220V | Ø270*80 | 50 | Ø230 | 4 | Stainless Steel 304/316 |
| EF270GMKH-12*1W | 12 | | | 65 | | | |
| EF270GMKH-6*3W | 18 | AC/DC24V, AC220V | Ø270*80 | 50 | Ø230 | 4 | Stainless Steel 304/316 |
| EF270GMKH-9*3W | 27 | | | 65 | | | |


Product Description

| | |
|---------------------|---|
| Beam Angle | Standard beam angle is 30°. You can also make 10°, 60°, 90° or 120° as your choice. |
| Available Color | Red, Yellow, Green, Blue, White, Warm White, RGB, DMX512 Control |
| Lifespan | 50,000 Hours, L70@25°C |
| Control Method | Single Color, Auto RGB Color Change(Internal Control), RGB 4 Wires Color Change with Remote(External Control), DMX512 Control |
| Main Material | Stainless steel 304/316, High light transmission tempered glass, Anti-aging silicone sealing ring. |
| Cable | Special underwater waterproof cable, 1 meter. |
| Working Temperature | -40°C ~~~ +45°C |
| Storage Temperature | -40°C ~~~ +70°C |
| Certification | CE, RoHS, ISO9001, IP68 |
| Waterproof Level | IP68 |

Product Description



5. Fountain Lamp --- ZK Series Cast Aluminum Central Hole Water Fountain Lamp --- Customized



EF180ZK

Technical Parameter

| Model Number | Rated Power(W) | Voltage | Dimension(mm) | Central Hole Diameter(mm) | Reference N.W(Kg) | Material |
|---------------|----------------|------------------|---------------|---------------------------|-------------------|----------------|
| EF180ZK-9*1W | 9 | AC/DC24V, AC220V | Ø180*84 | 48 | 2.5 | Cast Aluminium |
| EF180ZK-12*1W | 12 | | | | | |
| EF180ZK-15*1W | 15 | | | | | |
| EF180ZK-6*3W | 18 | | | | | |
| EF180ZK-9*3W | 27 | | | | | |
| EF180ZK-12*3W | 36 | | | | | |

Other Available Size for your choice


| Model Number | Rated Power(W) | Voltage | Dimension(mm) | Central Hole Diameter(mm) | Reference N.W(Kg) | Material |
|---------------|----------------|----------------------------|---------------|---------------------------|-------------------|----------------|
| EF130ZK-3*1W | 3 | AC/DC12V, AC/DC24V, AC220V | Ø130*80 | 38 | 1.5 | Cast Aluminium |
| EF130ZK-6*1W | 6 | | | | | |
| EF130ZK-9*1W | 9 | | | | | |
| EF160ZK-6*1W | 6 | AC/DC12V, AC/DC24V, AC220V | Ø160*80 | 38 | 2 | |
| EF160ZK-9*1W | 9 | | | | | |
| EF160ZK-12*1W | 12 | | | | | |
| EF160ZK-6*3W | 18 | AC/DC24V, AC220V | Ø160*80 | 38 | 2 | |
| EF160ZK-9*3W | 27 | | | | | |
| EF160ZK-12*3W | 36 | | | | | |

Product Description

| | |
|----------------------------|--|
| Beam Angle | Standard beam angle is 30°. You can also make 10°, 60°, 90° or 120° as your choice. |
| Available Color | Red, Yellow, Green, Blue, White, Warm White, RGB, DMX512 Control |
| Lifespan | 50,000 Hours, L70@25°C |
| Control Method | Single Color, Auto RGB Color Change(Internal Control), RGB 4 Wires Color Change with Remote(External Control), DMX512 Control |
| Main Material | Cast Aluminum Lamp Body, Stainless Steel Face Panel, High Light Transmission Tempered Glass, Anti-aging Silicone Sealing Ring. |
| Cable | Special underwater waterproof cable, 1 meter. |
| Working Temperature | -40°C ~~~ +45°C |
| Storage Temperature | -40°C ~~~ +70°C |
| Certification | CE, RoHS, ISO9001, IP68 |
| Waterproof Level | IP68 |

Product Description

5. Fountain Lamp --- ZMK Series Cast Aluminum Central Hole Dry Fountain Lamp --- Customized



EF160ZMK

Technical Parameter

| Model Number | Rated Power(W) | Voltage | Dimension(mm) | Central Hole Diameter(mm) | Recommend Cut Size(mm) | Reference N.W(Kg) | Material |
|---------------|----------------|----------------------------|---------------|---------------------------|------------------------|-------------------|---------------|
| EF160ZMK-6*1W | 6 | AC/DC12V, AC/DC24V, AC220V | Ø160*80 | 38 | Ø140 | 2 | Cast Aluminum |
| EF160ZMK-9*1W | 9 | | | | | | |

Other Available Size for your choice

| Model Number | Rated Power(W) | Voltage | Dimension(mm) | Central Hole Diameter(mm) | Recommend Cut Size(mm) | Reference N.W(Kg) | Material |
|----------------|----------------|----------------------------|---------------|---------------------------|------------------------|-------------------|---------------|
| EF180ZMK-6*1W | 6 | AC/DC12V, AC/DC24V, AC220V | Ø180*80 | 38 | Ø165 | 2.3 | Cast Aluminum |
| EF180ZMK-9*1W | 9 | | | | | | |
| EF180ZMK-12*1W | 12 | | | | | | |
| EF180ZMK-6*3W | 18 | AC/DC24V, AC220V | Ø180*80 | 38 | Ø165 | 2.3 | |
| EF200ZMK-6*1W | 6 | | | | | | |
| EF200ZMK-9*1W | 9 | AC/DC12V, AC/DC24V, AC220V | Ø200*80 | 48 | Ø185 | 2.8 | |
| EF200ZMK-12*1W | 12 | | | | | | |
| EF200ZMK-15*1W | 15 | | | | | | |
| EF200ZMK-9*3W | 27 | AC/DC24V, AC220V | Ø200*80 | 48 | Ø185 | 2.8 | |
| EF200ZMK-12*3W | 36 | | | | | | |
| EF220ZMK-12*1W | 12 | | | | | | |
| EF220ZMK-15*1W | 15 | AC/DC24V, AC220V | Ø220*80 | 60 | Ø205 | 2.6 | |
| EF220ZMK-18*1W | 18 | | | | | | |



Product Description

| | |
|---------------------|--|
| Beam Angle | Standard beam angle is 30°. You can also make 10°, 60°, 90° or 120° as your choice. |
| Available Color | Red, Yellow, Green, Blue, White, Warm White, RGB, DMX512 Control |
| Lifespan | 50,000 Hours, L70@25°C |
| Control Method | Single Color, Auto RGB Color Change(Internal Control), RGB 4 Wires Color Change with Remote(External Control), DMX512 Control |
| Main Material | Cast Aluminum Lamp Body, Stainless Steel Face Panel, High Light Transmission Tempered Glass, Anti-aging Silicone Sealing Ring. |
| Cable | Special underwater waterproof cable, 1 meter. |
| Working Temperature | -40°C ~~~ +45°C |
| Storage Temperature | -40°C ~~~ +70°C |
| Certification | CE, RoHS, ISO9001, IP68 |
| Waterproof Level | IP68 |

Product Description



5. Fountain Lamp --- ZMKH Series Cast Aluminum Central Hole Dry Fountain Lamp --- Customized



EF180ZMKH

Technical Parameter

| Model Number | Rated Power(W) | Voltage | Dimension(mm) | Central Hole Diameter(mm) | Recommend Cut Size(mm) | Reference N.W(Kg) | Material |
|----------------|----------------|----------------------------|---------------|---------------------------|------------------------|-------------------|---------------|
| EF180ZMKH-6*1W | 6 | AC/DC12V, AC/DC24V, AC220V | Ø180*80 | 38 | Ø160 | 2 | Cast Aluminum |
| EF180ZMKH-9*1W | 9 | | | | | | |

Other Available Size for your choice

| Model Number | Rated Power(W) | Voltage | Dimension(mm) | Central Hole Diameter(mm) | Recommend Cut Size(mm) | Reference N.W(Kg) | Material |
|-----------------|----------------|----------------------------|---------------|---------------------------|------------------------|-------------------|---------------|
| EF210ZMKH-6*1W | 6 | AC/DC12V, AC/DC24V, AC220V | Ø210*80 | 38 | Ø190 | 2.3 | Cast Aluminum |
| EF210ZMKH-9*1W | 9 | | | | | | |
| EF210ZMKH-12*1W | 12 | AC/DC24V, AC220V | Ø210*80 | 38 | Ø190 | 2.3 | |
| EF210ZMKH-9*3W | 27 | | | | | | |
| EF240ZMKH-9*1W | 9 | AC/DC12V, AC/DC24V, AC220V | Ø240*80 | 48 | Ø210 | 2.8 | |
| EF240ZMKH-12*1W | 12 | | | | | | |
| EF240ZMKH-15*1W | 15 | AC/DC24V, AC220V | Ø240*80 | 48 | Ø210 | 2.8 | |
| EF240ZMKH-9*3W | 27 | | | | | | |


Product Description

| | |
|----------------------------|---|
| Beam Angle | Standard beam angle is 30°. You can also make 10°, 60°, 90° or 120° as your choice. |
| Available Color | Red, Yellow, Green, Blue, White, Warm White, RGB, DMX512 Control |
| Lifespan | 50,000 Hours, L70@25°C |
| Control Method | Single Color, Auto RGB Color Change(Internal Control), RGB 4 Wires Color Change with Remote(External Control), DMX512 Control |
| Main Material | Cast Aluminum Lamp Body, Stainless Steel Face Panel, High Light Transmission Tempered Glass, Anti-aging Silicone Sealing Ring, Backwater Function |
| Cable | Special underwater waterproof cable, 1 meter. |
| Working Temperature | -40°C ~~~ +45°C |
| Storage Temperature | -40°C ~~~ +70°C |
| Certification | CE, RoHS, ISO9001, IP68 |
| Waterproof Level | IP68 |

Product Description



5. Fountain Lamp --- GM Series Stainless Steel304/316 Underground Lamp and Swimming Pool Light --- Customized




EF52GM

Technical Parameter

| Model Number | Rated Power(W) | Voltage | Dimension(mm) | Recommend Cut Size(mm) | Reference N.W(Kg) | Material |
|--------------|----------------|--------------------|---------------|------------------------|-------------------|---------------------|
| EF52GM-1*1W | 1 | AC/DC12V, AC/DC24V | Ø52*72 | 47 | 0.5 | Stainless Steel 304 |
| EF52GM-1*3W | 3 | | Ø52*90 | | | |

EF100GM



Technical Parameter

| Model Number | Rated Power(W) | Voltage | Dimension(mm) | Recommend Cut Size(mm) | Reference N.W(Kg) | Material |
|--------------|----------------|----------------------------|---------------|------------------------|-------------------|---------------------|
| EF100GM-3*1W | 3 | AC/DC12V, AC/DC24V, AC220V | Ø100*75 | Ø90 | 0.6 | Stainless Steel 304 |
| EF100GM-5*1W | 5 | AC/DC12V, AC/DC24V, AC220V | Ø100*75 | Ø90 | 0.6 | Stainless Steel 304 |


Product Description

| | | | | | | |
|----------------------------|---|--|--|--|--|--|
| Beam Angle | Standard beam angle is 30°. You can also make 10°, 60°, 90° or 120° as your choice. | | | | | |
| Available Color | Red, Yellow, Green, Blue, White, Warm White, RGB, DMX512 Control | | | | | |
| Lifespan | 50,000 Hours, L70@25°C | | | | | |
| Control Method | Single Color, Auto RGB Color Change(Internal Control), RGB 4 Wires Color Change with Remote(External Control), DMX512 Control | | | | | |
| Main Material | Stainless Steel 304 Lamp Body, Stainless Steel Face Panel, High Light Transmission Tempered Glass, Anti-aging Silicone Sealing Ring | | | | | |
| Cable | Special underwater waterproof cable, 1 meter. | | | | | |
| Working Temperature | -40°C ~~~ +45°C | | | | | |
| Storage Temperature | -40°C ~~~ +70°C | | | | | |
| Certification | CE, RoHS, ISO9001, IP68 | | | | | |
| Waterproof Level | IP68 | | | | | |

Product Description



6. Reduction Gear for Swing Fountain
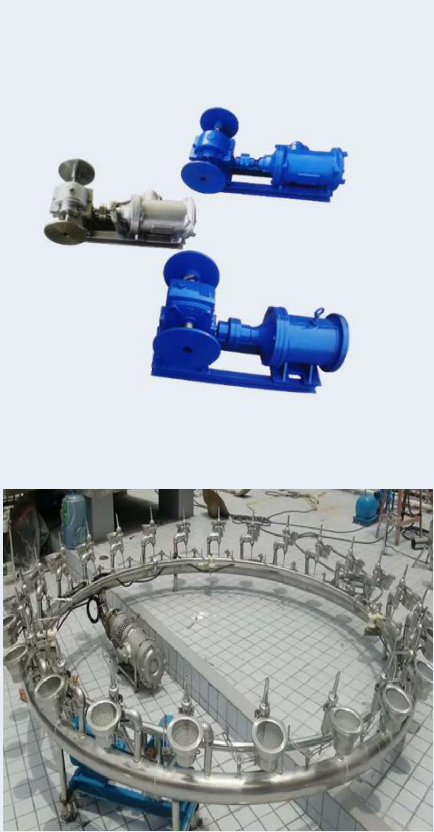
| Product Photo | Model Number | Dimension(mm) | Net Weight(Kg) | Power(Kw) | Material |
|--|--------------|---------------|----------------|-----------|---------------------|
|  | EFRB-1 | 650*270*300 | 43 | 1.1 | Cast Iron |
| | EFRB-2 | 850*300*350 | 54 | 2.2 | Cast Iron |
| | EFRB-3 | 650*270*300 | 34 | 1.1 | Stainless Steel 304 |