



工业级插头 | 插座 | 连接器
INDUSTRIAL PLUG | SOCKET | CONNECTOR

Distributor :



Energy Power Save CO.,LTD.

www.7-mars.com, www.siamenergysaving.com

ENTERPRISE CERTIFICATE

为保证产品质量的稳定性和可靠性，我们坚持国际质量标准体系运行，并对产品实施严格的检测监控，我们的高标准是因为对品牌完美的追求，我们的诸多认证不仅仅是荣耀，更是我们前进的动力。

In order to ensure the stability and reliability of the product quality, we adhere to the international quality standard system operation and the implementation of strict inspection and monitoring our high standards because the brand pursuit of perfection, many of our certification is not just glory, it is our motivation.



工业级插头 | 插座 | 连接器

INDUSTRIAL PLUG
SOCKET | CONNECTOR



企业荣誉



FEATURE

FEATURE OF PLUG AND SOCKET

我们电器为了获得技术上的不断进行，在技术的创新投入了大量资金，用于产品的研发和技术创新，先后引进各类国内外先进的研发设备和自动化检测设备。

In order to obtain continuous technological progress, a large amount of funds have been invested in technological innovation for product development and technological innovation, and various advanced R&D equipment and automated testing equipment have been introduced at home and abroad.



工业级插头 | 插座 | 连接器

INDUSTRIAL PLUG

SOCKET | CONNECTOR



生产车间



ENTERPRISE

APPLICATION AREA

产品市场涵盖于钢铁冶炼、石油化工、电力、电子、铁路、建筑工地、机场、矿山、采矿场、排水处理厂以及港口、码头、商场、宾馆等各类工矿企业。

Product market covers steel smelting, petrochemical, power, electronics, railway, construction sites, Airports, mines, mining sites, drainage treatment plants and ports, wharfs, shopping malls, hotels and other industrial and mining enterprises.

电力电网



能源化工



高校院所



市政商贸



应用领域

楼宇建筑



机场大道



医疗医药



技术参数 防护等级

PARAMETER PROTECTION RATINGS


对固体的防护 Protection Against Solids	对液体的防护 Protection Against Liquids	对机械冲击的防护 Protection Against Impact
IP 0  测试 Testing 无防护 No Protection	IP 0  测试 Testing 无防护 No Protection	IK 00  测试 Testing 无防护 No Protection
1  可防止50mm以上固体的危害(例如: 偶然的手接触) Protected against solid objects equal to or greater than 50mm diameter, (eg. accidental contact with hand)	1  可防止垂直滴水的危害 Protected against drops of water falling vertically	1  0.2kg 30mm 冲击0.7焦耳 Impact of 0.7J
2  可防止12mm以上固体的危害(例如: 手指的大小) Protected against solid objects equal to or greater than 12mm diameter, (eg. contact with finger)	2  可防止与垂直方向成15°以下直接滴水的危害 Protected against drops of water falling at up to 15 degree from the vertical	2  0.5kg 30mm 冲击1焦耳 Impact of 1J
3  可防止2.5mm以上固体的危害(例如: 粗工具、带电线) Protected against solid objects equal to or greater than 2.5mm diameter, (eg. tools and wires)	3  可防止与垂直方向成60°角淋水的危害 Protected against spraying water falling at up to 60 degree from the vertical	3  0.5kg 40mm 冲击2焦耳 Impact of 2J
4  可防止1mm以上固体的危害(例如: 金属线) Protected against solid objects equal to or greater than 1mm diameter, (eg. wires)	4  可防止来自各个方向的溅水危害 Protected against splashing water from all directions.	4  1.7kg 30mm 冲击5焦耳 Impact of 5J
5  可防止粉尘的危害 Protected against quantities of dust	5  可防止来自各个方向的低压水喷射的危害 Protected against jets of water from all directions.	5  5kg 20mm 冲击10焦耳 Impact of 10J
6  完全防止粉尘的危害 Completely protected against dust.	6  可防止四面方向的高压力喷水的危害 Protected against jets of water of similar force to heavy seas.	6  5kg 40mm 冲击20焦耳 Impact of 20J
7  可防止50cm以下浸没危害的影响 Protected against the effects of immersion at 50cm below surface of water	7  可防止50cm以下浸没危害的影响 Protected against the effects of immersion at 50cm below surface of water	按照VDE0470, 第100部分“外部操作的电气设备对外部机械冲击的防护等级(IK代码)” 外来提供的防机械冲击的防护等级用IK代码来表示 IK代码 冲击能量/焦耳 According to the 100th part of VDE0470 "The protection degree of external operation of electrical equipment to the external mechanical damage(IK code)" IK code represent the protection degree of the shell against mechanical impact. IK code: Impact energy/joules
8  可防止在压力下长期浸没的危害 Protected against the effects of continuous immersion.	8  可防止在压力下长期浸没的危害 Protected against the effects of continuous immersion.	

WATERPROOF CONNECTIVITY

IP68 CIRCULAR CONNECTORS, PLASTIC



LK13/LK16/LK21 IP68 Threaded coupling

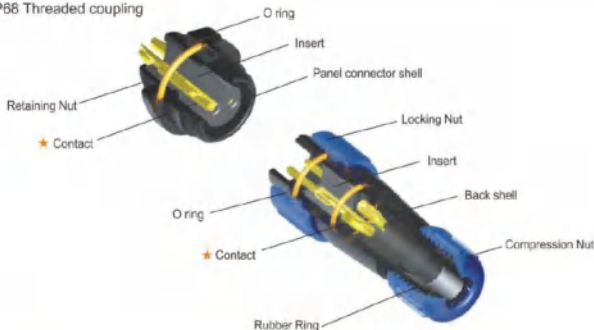

Material and Specification		
Product Type	Connector	Overmolded Cable Assemblies
Coupling	Threaded coupling	Threaded coupling
Shell material	Nylon60, fire resistance: V-0	PC, PVC, fire resistance: V-0 Locking nut material: anodized aluminum
Insert material	PPS max temperature 260℃, fire resistance: V-0	PPS max temperature 260℃, fire resistance: V-0
Contact material	Brass with gold plating	Brass with gold plating
Termination	LK13: solder, LK16: solder/crimp, LK21: solder/screw/crimp	
Cable outer diameter range	LK13 I: 4-6.5mm LK13 II: 5-8mm LK16: 6-10mm LK21 I: 4-5.7mm LK21 II: 7-12mm	
IP rating	IP68	IP66
Mating cycle	> 500	> 500
Temperature range	-25℃+85℃	-25℃+85℃
Insulation resistance mc ²	2000	2000




LK16 SERIES IP68

IP68 CIRCULAR CONNECTORS, PLASTIC

Cable Connector

Mate with LK1611, LK1612

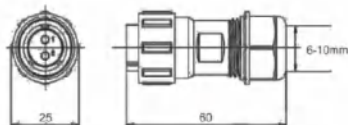


LK1610/P

LK1610/S

C: with cap, N: without cap
1: solder 3: crimp
Number of contact: 2 3 4 5 7 9

Front mount

Mate with LK1610

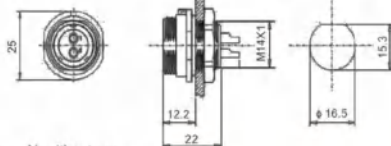

LK1612/P

LK1612/S

C: with cap, N: without cap
1: solder 3: crimp
Number of contact: 2 3 4 5 7 9

CONTACT ARRANGEMENT AND SPEC FOR SOLDER TERMINATION

Number of contact	2	3	4	5	7	9
Male contact face view						
Rated current (A)	10A	5A	5A	5A	5A	5A
Contact diameter(Φ mm)	Φ 1.8 × 2	Φ 1.8 × 3	Φ 1 × 4	Φ 1 × 5	Φ 1 × 7	Φ 1 × 9
Rated voltage (AC: V)	250V	250V	250V	250V	250V	250V
Test voltage (AC: V) 1 min	1500V	1500V	1500V	1500V	1500V	1500V
Contact resistance MΩ	2	2	5	5	5	5
Wire size mm/AWG	≤ 2/14	≤ 0.785/18	≤ 0.785/18	≤ 0.785/18	≤ 0.785/18	≤ 0.785/18



LK21 SERIES IP68

IP68 CIRCULAR CONNECTORS, PLASTIC




LK2110/P

LK2110/S

Cable Connector

Mate with LK2111, LK2112, LK2113



C: with cap, N: without cap

1: solder 2: screw 3: crimp

Cable outer diameter I: 4.5-7mm II: 7-12mm

Number of contact: 2, 3, 4, 5, 7, 9, 12




LK2111/P

LK2111/S

In-line cable connector

Mate with LK2110




LK2112/P

LK2112/S

Front mount

Mate with LK2110





LK2113/P

LK2113/S

Front mount

Mate with LK2110



C: with cap, N: without cap

1: solder 2: screw 3: crimp

Number of contact: 2, 3, 4, 5, 7, 9, 12

Number of contact	2	3	4	5	7	9	12
Male contact face view							
Rated current (A)	25A	25A	25A	25A	10A	5A	5A
Contact diameter(Φmm)	Φ 2.8 × 2	Φ 2.8 × 3	Φ 2.8 × 4	Φ 2.8 × 5	Φ 1.8 × 7	Φ 1 × 9	Φ 1 × 12
Rated voltage (AC.V)	250V	250V	250V	250V	250V	250V	250V
Test voltage (AC.V) 1 min	1500V	1500V	1500V	1500V	1500V	1500V	1500V
Contact resistance MΩ	1	1	1	1	2	5	5
Wire size mm ² /AWG	≤4.17/11	≤4.17/11	≤4.17/11	≤4.17/11	≤2/14	≤0.785/18	≤0.785/18


工业用插头 Industrial Plug



LK-013-4 LK-023-4

earth contact position	4h	
rated current(A)	16	32
pole	3	
dimension(mm)	a	122 139
	b	59 75
	c	51 64
	Φ	6 8
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP44



LK-013 LK-023

earth contact position	6h	
rated current(A)	16	32
pole	3	
dimension(mm)	a	122 139
	b	59 75
	c	51 64
	Φ	6 8
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44



LK-014 LK-024

earth contact position	6h	
rated current(A)	16	32
pole	4	
dimension(mm)	a	122 139
	b	65 75
	c	55 64
	Φ	6 8
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP44



LK-015 LK-025

earth contact position	6h	
rated current(A)	16	32
pole	5	
dimension(mm)	a	130 143
	b	72 84
	c	64 70
	Φ	8 8
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~3P+N+E
防护等级 Protection degree: IP44



LK-033 LK-043

earth contact position	6h	
rated current(A)	63	125
pole	3	
dimension(mm)	a	231.5 293
	b	110 125
	c	10-38 30-50
	Φ	110 125
cable nominal cross-section area(mm ²)	6-16	16-50

电 流 Current(A): 63A, 125A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP67



LK-034 LK-044


earth contact position	6h	
rated current(A)	63	125
pole	4	
dimension(mm)	a	231.5 293
	b	110 125
	c	10-38 30-50
	Φ	110 125
cable nominal cross-section area(mm ²)	6-16	16-50

电 流 Current(A): 63A, 125A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP67






电 流 Current(A): 63A-125A
电 压 Voltage(V): 220-380V~
防 护 等 级 Protection degree: IP67




earth contact position		2P+E	
rated current(A)		63	125
	pole	5	
dimension(mm)	a	231.5	293
	b	110	125
	c	16-38	30-50
	φ	110	125
cable nominal cross-section area(mm ²)		6-16	16-50

电 流 Current(A): 16A-32A
电 压 Voltage(V): 110-130V~2P+E
防 护 等 级 Protection degree: IP44




earth contact position		4h	
rated current(A)		16	32
	pole	3	
dimension(mm)	a	141	178
	b	59	75
	c	51	64
	φ	8	10
cable nominal cross-section area(mm ²)		1-2.5	2.5-6

电 流 Current(A): 16A-32A
电 压 Voltage(V): 220-240V~2P+E
防 护 等 级 Protection degree: IP44




earth contact position		Rn	
rated current(A)		16	32
	pole	3	
dimension(mm)	a	141	178
	b	59	75
	c	51	64
	φ	8	10
cable nominal cross-section area(mm ²)		1-2.5	2.5-6

电 流 Current(A): 16A-32A
电 压 Voltage(V): 380-415V~3P+E
防 护 等 级 Protection degree: IP44



earth contact position		3P	
rated current(A)		16	32
	pole	4	
dimension(mm)	a	141	178
	b	65	75
	c	55	64
	φ	8	10
cable nominal cross-section area(mm ²)		1-2.5	2.5-6

电 流 Current(A): 16A-32A
电 压 Voltage(V): 220-380V~
防 护 等 级 Protection degree: IP44



earth contact position		3P	
rated current(A)		16	32
	pole	5	
dimension(mm)	a	169	181
	b	72	84
	c	64	70
	φ	10	10
cable nominal cross-section area(mm ²)		1-2.5	2.5-6

电 流 Current(A): 16A-32A
电 压 Voltage(V): 110-130V~2P+E
防 护 等 级 Protection degree: IP44



earth contact position		4h	
rated current(A)		16	32
	pole	3	
dimension(mm)	a	135	153
	b	92	122
	c	71	71
	d	50	65
	e	57	57
	f	20	20
	g	32.5	32.5
	h	6.5	6.5
cable nominal cross-section area(mm ²)		1-2.5	2.5-6



LK-035 LK-045



LK-013L/LK-023L-4



LK-013L LK-023L



LK-014L LK-024L



LK-015L LK-025L

工业插座 Industrial Socket




LK-113-4 LK-123-4



LK-113 LK-123

earth contact position		pin	
rated current(A)		16	32
		pole	
		3	
dimension(mm)			
		a	135
		b	92
		c	71
		d	50
		e	57
		f	20
		g	32.5
		h	6.5
cable nominal cross-section area(mm ²)		1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44



LK-114 LK-124

earth contact position		pin	
rated current(A)		16	32
		pole	
		4	
dimension(mm)			
		a	140
		b	95
		c	71
		d	56
		e	57
		f	20
		g	32.5
		h	6.5
cable nominal cross-section area(mm ²)		1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP44



LK-115 LK-125

earth contact position		pin	
rated current(A)		16	32
		pole	
		5	
dimension(mm)			
		a	139
		b	100
		c	71
		d	63
		e	57
		f	20
		g	32.5
		h	6.5
cable nominal cross-section area(mm ²)		1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~240-415V~3P+N+E
防护等级 Protection degree: IP44



LK-133 LK-143

earth contact position		pin	
rated current(A)		63	125
		pole	
		3	
dimension(mm)			
		a	134
		b	311
		c	108
		d	111
		e	20
		f	153
		g	6
cable nominal cross-section area(mm ²)		6-25	25-70


电 流 Current(A): 63A, 125A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP67



LK-134 LK-144

earth contact position		pin	
rated current(A)		63	125
		pole	
		4	
dimension(mm)			
		a	134
		b	311
		c	108
		d	111
		e	20
		f	153
		g	6
cable nominal cross-section area(mm ²)		6-25	25-70


电 流 Current(A): 63A, 125A
电 压 Voltage(V): 380-415V~2P+E
防护等级 Protection degree: IP67



LK-135 LK-145


earth contact position		pin	
rated current(A)		63	125
		pole	
		5	
dimension(mm)			
		a	134
		b	311
		c	108
		d	111
		e	20
		f	153
		g	6
cable nominal cross-section area(mm ²)		6-25	25-70

电 流 Current(A): 63A, 125A
电 压 Voltage(V): 220-380V~240-415V~3P+N+E
防护等级 Protection degree: IP67





电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP44




earth contact position	4h	
rated current(A)	16	32
pole		
3		
dimension(mm)		
a	108	190
b	92	102
c	71	71
d	50	65
e	57	57
f	20	20
g	32.5	32.5
h	6.5	6.5
cable nominal cross-section area(mm ²)	1-2.5	2.5-6



LK-113L-4 LK-123L-4

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44




earth contact position	4h	
rated current(A)	16	32
pole		
3		
dimension(mm)		
a	168	190
b	95	102
c	71	71
d	50	65
e	57	57
f	20	20
g	32.5	32.5
h	6.5	6.5
cable nominal cross-section area(mm ²)	1-2.5	2.5-6



LK-113L LK-123L

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP44




earth contact position	4h	
rated current(A)	16	32
pole		
4		
dimension(mm)		
a	170	190
b	95	102
c	71	71
d	56	64.5
e	57	57
f	20	20
g	32.5	32.5
h	6.5	6.5
cable nominal cross-section area(mm ²)	1-2.5	2.5-6



LK-114L LK-124L

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~3P+N+E
240-415V~3P+N+E
防护等级 Protection degree: IP44




earth contact position	4h	
rated current(A)	16	32
pole		
5		
dimension(mm)		
a	196	193
b	100	107
c	71	71
d	63	70.5
e	57	57
f	20	20
g	32.5	32.5
h	6.5	6.5
cable nominal cross-section area(mm ²)	1-2.5	2.5-6



LK-115L LK-125L

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP44




earth contact position	4h	
rated current(A)	16	32
pole		
3		
dimension(mm)		
a	131	150
b	68	92
c	50	65
d	6	8
cable nominal cross-section area(mm ²)	1-2.5	2.5-6



LK-213-4 LK-223-4

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44



earth contact position	4h	
rated current(A)	16	32
pole		
3		
dimension(mm)		
a	131	150
b	68	92
c	50	65
d	6	8
cable nominal cross-section area(mm ²)	1-2.5	2.5-6



LK-213 LK-223


工业连接器 Industrial Connectors



LK-214 LK-224

earth contact position		pin	
rated current(A)		16	32
pole		4	
dimension(mm)	a	131	150
	b	79	92
	c	56	65
	Φ	6	8
cable nominal cross-section area(mm ²)		1-2.5	2.5-6


电 流 Current(A): 16A 32A
电 压 Voltage(V): 380-415V-3P+E
防护等级 Protection degree: IP44



LK-215 LK-225

earth contact position		pin	
rated current(A)		16	32
pole		5	
dimension(mm)	a	139	154
	b	90	100
	c	63	70.5
	Φ	8	8
cable nominal cross-section area(mm ²)		1-2.5	2.5-6

电 流 Current(A): 16A 32A
电 压 Voltage(V): 220-380V-3P+N+E
防护等级 Protection degree: IP44



LK-233 LK-243

earth contact position		pin	
rated current(A)		63	125
pole		3	
dimension(mm)	a	240	303
	b	115	128
	c	15-38	30-50
	d	108	120
cable nominal cross-section area(mm ²)		6-16	16-50


电 流 Current(A): 63A 125A
电 压 Voltage(V): 220-240V-2P+E
防护等级 Protection degree: IP67



LK-234 LK-244

earth contact position		pin	
rated current(A)		63	125
pole		4	
dimension(mm)	a	240	303
	b	115	128
	c	15-38	30-50
	d	108	120
cable nominal cross-section area(mm ²)		6-16	16-50

电 流 Current(A): 63A 125A
电 压 Voltage(V): 380-415V-3P+E
防护等级 Protection degree: IP67



LK-235 LK-245

earth contact position		pin	
rated current(A)		63	125
pole		5	
dimension(mm)	a	240	303
	b	115	128
	c	15-38	30-50
	d	108	120
cable nominal cross-section area(mm ²)		6-16	16-50

电 流 Current(A): 63A 125A
电 压 Voltage(V): 220-380V-3P+N+E
防护等级 Protection degree: IP67



LK-213L-4 LK-223L-4

earth contact position		pin	
rated current(A)		16	32
pole		3	
dimension(mm)	a	150	189
	b	68	92
	c	50	65
	Φ	8	10
cable nominal cross-section area(mm ²)		1-2.5	2.5-6

电 流 Current(A): 16A 32A
电 压 Voltage(V): 110-130V-2P+E
防护等级 Protection degree: IP44





LK-213L LK-223L



LK-214L LK-224L



LK-215L LK-225L



LK-313-4 LK-323-4



LK-314 LK-324



LK-315 LK-325



LK-316 LK-326



LK-317 LK-327



LK-318 LK-328



LK-319 LK-329

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44



earth contact position	6h		
rated current(A)	16	32	
	pole		
	3		
dimension(mm)	a	150	189
	b	68	92
	c	50	65
	d	8	10
cable nominal cross-section area(mm ²)	1-2.5	2.5-6	



LK-213L LK-223L

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP44



earth contact position	6h		
rated current(A)	16	32	
	pole		
	4		
dimension(mm)	a	149	189
	b	79	92
	c	56	65
	φ	8	10
cable nominal cross-section area(mm ²)		1-2.5	2.5-6



LK-214L LK-224L

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~3P+N+E
240-415V
防护等级 Protection degree: IP44




earth contact position	6h		
rated current(A)	16	32	
	pole		
	5		
dimension(mm)	a	179	193
	b	90	100
	c	63	70.5
	d	10	10
	e	10	10
cable nominal cross-section area(mm ²)		1-2.5	2.5-6



LK-215L LK-225L

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP44




earth contact position		4h		
rated current(A)		16	32	
pole		3		
dimension(mm)	a	74	91	
	b	70	85	
	c	70	70	
	d	70	70	
	e	56	56	
	f	56.5	56.5	
	g	56.5	56.5	
	h	24	29	
	cable nominal cross-section area(mm ²)		1-2.5	2.5-6



LK-313-4 LK-323-4

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44




earth contact position			
rated current(A)	1632		
	pole3		
dimension(mm)	a	74	91
	b	70	86
	c	70	70
	d	70	70
	e	56	56
	f	56.5	56.5
	g	56.5	56.5
	h	24	29
	i	24	29
	j	24	29
cable nominal cross-section area(mm ²)		1-2.5	2.5-6



LK-314 LK-324

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP44



earth contact position		6h	
rated current(A)		16	32
pole		4	
dimension(mm)	a	76	90
	b	80	87
	c	70	70
	d	70	70
	e	56	56
	f	56.5	56.5
	g	56.5	56.5
	h	24	30
cable nominal cross-section area(mm ²)		1-2.5	2.5-6



LK-315 LK-325


工 業 電 氣 設 備 有 限 公 司 Hise Direct Supply



LK-315 LK-325

earth contact position	16 32	
rated current(A)	16	32
poles	5	
dimension(mm)		
a	76	93
b	86	96
c	70	70
d	70	70
e	56	56
f	56.5	56.5
g	56.5	56.5
h	26	28
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~
240-415V~ 3P+N+E
防护等级 Protection degree: IP44



LK-333 LK-343

earth contact position	63 125	
rated current(A)	63	125
poles	3	
dimension(mm)		
a	100	120
b	100	120
c	80	101
d	80	101
e	54.5	68
f	88	96
g	114	122
h	108	122
i	70	88
cable nominal cross-section area(mm ²)	6-25	25-70


电 流 Current(A): 63A, 125A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP67



LK-334 LK-344

earth contact position	63 125	
rated current(A)	63	125
poles	4	
dimension(mm)		
a	100	120
b	100	120
c	80	101
d	80	101
e	54.5	68
f	88	96
g	114	122
h	108	122
i	70	88
cable nominal cross-section area(mm ²)	6-25	25-70


电 流 Current(A): 63A, 125A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP67



LK-335 LK-345

earth contact position	63 125	
rated current(A)	63	125
poles	5	
dimension(mm)		
a	100	120
b	100	120
c	80	101
d	80	101
e	54.5	68
f	88	96
g	114	122
h	108	122
i	70	88
cable nominal cross-section area(mm ²)	6-25	25-70

电 流 Current(A): 63A, 125A
电 压 Voltage(V): 220-380V~
240-415V~ 3P+N+E
防护等级 Protection degree: IP67




第二代工业插头, Second Industrial Plug



LK-013-4 LK-023-4

earth contact position	16 32	
rated current(A)	16	32
poles	3	
dimension(mm)		
a	118	146
b	82	100
c	47	63
d	6-15	10-20
sw	38	50
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP44



LK-013 LK-023


earth contact position	16 32	
rated current(A)	16	32
poles	3	
dimension(mm)		
a	118	146
b	82	100
c	47	63
d	6-15	10-20
sw	38	50
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44





电 流 Current(A): 16A, 32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP44




earth contact position		pin
rated current(A)	16	32
pole		4
dimension(mm)		
a	124	146
b	88	100
c	53	63
d	6-15	10-20
sw	38	50
cable nominal cross-section area(mm ²)		1-2.5 2.5-5



LK-014 LK-024

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~3P+N+E
防护等级 Protection degree: IP44




earth contact position		pin
rated current(A)	16	32
pole		5
dimension(mm)		
a	131	152
b	95	106
c	61	70
d	8-16	10-20
sw	42	50
cable nominal cross-section area(mm ²)		1-2.5 2.5-5



LK-015 LK-025

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP67




earth contact position		pin
rated current(A)	16	32
pole		3
dimension(mm)		
a	118	146
b	82	100
c	47	63
d	6-15	10-20
sw	38	50
cable nominal cross-section area(mm ²)		1-2.5 2.5-5



LK-0132-4 LK-0232-4

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP67




earth contact position		pin
rated current(A)	16	32
pole		3
dimension(mm)		
a	118	146
b	82	100
d	6-15	10-20
sw	38	50
cable nominal cross-section area(mm ²)		1-2.5 2.5-5



LK-0132 LK-0232

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP67




earth contact position		pin
rated current(A)	16	32
pole		4
dimension(mm)		
a	124	146
b	79	93
d	6-16	10-20
sw	38	50
cable nominal cross-section area(mm ²)		1-2.5 2.5-6



LK-0142 LK-0242

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~3P+N+E
防护等级 Protection degree: IP67



earth contact position		pin
rated current(A)	16	32
pole		5
dimension(mm)		
a	131	152
b	87	100
d	8-16	10-20
sw	42	50
cable nominal cross-section area(mm ²)		1-2.5 2.5-6



LK-0152 LK-0252



LK-0332-4 LK-0432-4

earth contact position	4h	
rated current(A)	63	125
pole	3	
dimension(mm)	a	240 295
	b	115 126
	c	30 44.5
cable nominal cross-section area(mm ²)	5-16	16-50

电 流 Current(A): 63A, 125A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP67



LK-0332 LK-0432

earth contact position	5h	
rated current(A)	63	125
pole	3	
dimension(mm)	a	240 295
	b	115 126
	c	30 44.5
cable nominal cross-section area(mm ²)	5-16	16-50

电 流 Current(A): 63A, 125A
电 压 Voltage(V): 220-250V~2P+E
防护等级 Protection degree: IP67



LK-0342 LK-0442

earth contact position	5h	
rated current(A)	63	125
pole	4	
dimension(mm)	a	240 295
	b	115 126
	c	30 44.5
cable nominal cross-section area(mm ²)	5-16	16-50

电 流 Current(A): 63A, 125A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP67



LK-0352 LK-0452

earth contact position	5h	
rated current(A)	63	125
pole	5	
dimension(mm)	a	240 295
	b	115 126
	c	30 44.5
cable nominal cross-section area(mm ²)	5-16	16-50

电 流 Current(A): 63A, 125A
电 压 Voltage(V): 220-380V~220-415V~3P+N+E
防护等级 Protection degree: IP67




工业用密封型插座 Hite Inpined Socket



LK-413-4 LK-423-4

earth contact position	4h	
rated current(A)	16	32
pole	3	
dimension(mm)	a	87 97
	b	70 80
	c	50 60
	d	49 57
	e	43 42
	f	47 51
	g	36 34
	h	5 6
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP44



LK-413 LK-423


earth contact position	5h	
rated current(A)	16	32
pole	3	
dimension(mm)	a	87 97
	b	70 80
	c	50 60
	d	49 57
	e	43 42
	f	47 51
	g	36 34
	h	5 6
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44






电 流 Current(A): 16A, 32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP44




earth contact position		16		32	
rated current(A)		16		32	
pole		16		4	
dimension(mm)		16		32	
a	89	89	89	89	89
b	76	76	76	76	76
c	62	62	62	62	62
d	57	57	57	57	57
e	60	60	60	60	60
f	44	44	44	44	44
g	5	5	5	5	5
cable nominal cross-section area(mm ²)		1-2.5		2.5-6	

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~3P+N+E
防护等级 Protection degree: IP44




earth contact position		16		32	
rated current(A)		16		32	
pole		16		5	
dimension(mm)		16		32	
a	79	79	79	79	79
b	80	80	80	80	80
c	75	75	75	75	75
d	62	62	62	62	62
e	57	57	57	57	57
f	60	60	60	60	60
g	44	44	44	44	44
h	5	5	5	5	5
cable nominal cross-section area(mm ²)		1-2.5		2.5-6	

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP44



earth contact position		16		32	
rated current(A)		16		32	
pole		16		3	
dimension(mm)		16		32	
a	134	134	134	134	134
b	80	80	80	80	80
c	71	71	71	71	71
d	43.5	43.5	43.5	43.5	43.5
e	57	57	57	57	57
f	20	20	20	20	20
g	32.5	32.5	32.5	32.5	32.5
h	6.5	6.5	6.5	6.5	6.5
cable nominal cross-section area(mm ²)		1-2.5		2.5-6	

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44




earth contact position		16		32	
rated current(A)		16		32	
pole		16		3	
dimension(mm)		16		32	
a	134	134	134	134	134
b	80	80	80	80	80
c	71	71	71	71	71
d	43.5	43.5	43.5	43.5	43.5
e	57	57	57	57	57
f	20	20	20	20	20
g	32.5	32.5	32.5	32.5	32.5
h	6.5	6.5	6.5	6.5	6.5
cable nominal cross-section area(mm ²)		1-2.5		2.5-6	

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP44



earth contact position		16		32	
rated current(A)		16		32	
pole		16		4	
dimension(mm)		16		32	
a	139	139	139	139	139
b	80	80	80	80	80
c	71	71	71	71	71
d	50	50	50	50	50
e	57	57	57	57	57
f	20	20	20	20	20
g	32.5	32.5	32.5	32.5	32.5
h	6.5	6.5	6.5	6.5	6.5
cable nominal cross-section area(mm ²)		1-2.5		2.5-6	

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~3P+N+E
防护等级 Protection degree: IP44



earth contact position		16		32	
rated current(A)		16		32	
pole		16		5	
dimension(mm)		16		32	
a	138.5	138.5	138.5	138.5	138.5
b	83	83	83	83	83
c	71	71	71	71	71
d	55	55	55	55	55
e	57	57	57	57	57
f	20	20	20	20	20
g	32.5	32.5	32.5	32.5	32.5
h	6.5	6.5	6.5	6.5	6.5
cable nominal cross-section area(mm ²)		1-2.5		2.5-6	



LK-414 LK-424



LK-415 LK-425



LK-513-4 LK-523-4



LK-513 LK-523



LK-514 LK-524




LK-515 LK-525

最新系列插座 Implement Socket



LK-613-4 LK-623-4



LK-613 LK-623



LK-614 LK-624



LK-615 LK-625

第二代工业用插座 Newer Industrial Socket



LK-113K-4 LK-123K-4



LK-113K LK-123K

earth contact position	4h	
rated current(A)	16	32
	pole 3	
dimension(mm)	a	56
	b	56
	c	70.5
	d	70.5
	e	45
	f	23
	g	42
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

earth contact position	4h	
rated current(A)	16	32
	pole 3	
dimension(mm)	a	56
	b	56
	c	70.5
	d	70.5
	e	45
	f	23
	g	42
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


earth contact position	4h	
rated current(A)	16	32
	pole 4	
dimension(mm)	a	56
	b	56
	c	70.5
	d	70.5
	e	42
	f	23
	g	42
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

earth contact position	4h	
rated current(A)	16	32
	pole 5	
dimension(mm)	a	56
	b	56
	c	70.5
	d	70.5
	e	57
	f	23
	g	42
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


earth contact position	4h	
rated current(A)	16	32
	pole 3	
dimension(mm)	a	151
	b	96
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

earth contact position	4h	
rated current(A)	16	32
	pole 3	
dimension(mm)	a	151
	b	96
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP44




电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44




电 流 Current(A): 16A, 32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP44




电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~3P+N+E
防护等级 Protection degree: IP44



电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP67



电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP67





1-2P+E



3P+N+E



3P+N



3P+N



1-2P



1-2P



2-3P+E



2-3P+E




2-3P+E

电 流 Current(A): 16A 32A

电 压 Voltage(V): 220-380V~ 3P+N+E

防护等级 Protection degree: IP67



earth contact position	2P	
rated current(A)	16	32
pole		
	4	
dimension(mm)	a	155
	b	98
cable nominal cross-section area(mm ²)	1-2.5	2.5-6




LK-114K LK-124K

电 流 Current(A): 16A 32A

电 压 Voltage(V): 220-380V~ 3P+N+E

防护等级 Protection degree: IP67



earth contact position	2P	
rated current(A)	16	32
pole		
	5	
dimension(mm)	a	153
	b	103
cable nominal cross-section area(mm ²)	1-2.5	2.5-6




LK-115K LK-125K

电 流 Current(A): 16A 32A

电 压 Voltage(V): 110-130V~ 2P+E

防护等级 Protection degree: IP67



earth contact position	4P	
rated current(A)	16	32
pole		
	3	
dimension(mm)	a	151
	b	96
cable nominal cross-section area(mm ²)	1-2.5	2.5-6




LK-1132-4 LK-1232-4

电 流 Current(A): 16A 32A

电 压 Voltage(V): 220-240V~ 2P+E

防护等级 Protection degree: IP67



earth contact position	2P	
rated current(A)	16	32
pole		
	3	
dimension(mm)	a	151
	b	96
cable nominal cross-section area(mm ²)	1-2.5	2.5-6




LK-1132 LK-1232

电 流 Current(A): 16A 32A

电 压 Voltage(V): 380-415V~ 3P+E

防护等级 Protection degree: IP67



earth contact position	2P	
rated current(A)	16	32
pole		
	4	
dimension(mm)	a	155
	b	98
cable nominal cross-section area(mm ²)	1-2.5	2.5-6




LK-1142 LK-1242

电 流 Current(A): 16A 32A

电 压 Voltage(V): 220-380V~ 3P+N+E

防护等级 Protection degree: IP67



earth contact position	2P	
rated current(A)	16	32
pole		
	5	
dimension(mm)	a	153
	b	103
cable nominal cross-section area(mm ²)	1-2.5	2.5-6



LK-1152 LK-1252



LK-1332-4 LK-1432-4



LK-1332 LK-1432



LK-1342 LK-1442



LK-1352 LK-1452

earth contact position	4h	
rated current(A)	63	125
pole	3	
dimension(mm)	a	175 190
	b	170 260
	c	230 330
	d	118 160
	e	136 240
	f	104 140
cable nominal cross-section area(mm ²)	6-16	16-50

earth contact position	4h	
rated current(A)	63	125
pole	3	
dimension(mm)	a	175 190
	b	170 260
	c	230 330
	d	118 160
	e	136 240
	f	104 140
cable nominal cross-section area(mm ²)	6-16	16-50


earth contact position	4h	
rated current(A)	63	125
pole	4	
dimension(mm)	a	175 190
	b	170 260
	c	230 330
	d	118 160
	e	136 240
	f	104 140
cable nominal cross-section area(mm ²)	6-16	16-50

earth contact position	4h	
rated current(A)	63	125
pole	5	
dimension(mm)	a	175 190
	b	170 260
	c	230 330
	d	118 160
	e	136 240
	f	104 140
cable nominal cross-section area(mm ²)	6-16	16-50


earth contact position	4h	
rated current(A)	16	32
pole	3	
dimension(mm)	a	129 159
	b	76 92
	c	6-15 10-20
	sw	38 50
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

earth contact position	4h	
rated current(A)	16	32
pole	3	
dimension(mm)	a	129 159
	b	76 92
	c	6-15 10-20
	sw	38 50
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 63A, 125A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP67




电 流 Current(A): 63A, 125A
电 压 Voltage(V): 220-250V~2P+E
防护等级 Protection degree: IP67



电 流 Current(A): 63A, 125A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP67



电 流 Current(A): 63A, 125A
电 压 Voltage(V): 220-380V~2P+N+E
防护等级 Protection degree: IP67



工业用插头、插座、耦合器（连接器）及接插装置 Second Industrial Connector




LK-213-4 LK-223-4




LK-213 LK-223

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP44



电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44






电 流 Current(A): 16A, 32A

电 压 Voltage(V): 380-415V-3P+E

防护等级 Protection degree: IP44



earth contact position	30	
rated current(A)	16	32
pole		
4		
dimension(mm)		
a	135	159
b	80	92
c	6-15	10-20
sw	38	50
cable nominal cross-section area(mm ²)		
1-2.5 2.5-6		




LK-214 LK-224

电 流 Current(A): 16A, 32A

电 压 Voltage(V): 220-380V-3P+N+E

防护等级 Protection degree: IP44



earth contact position	30	
rated current(A)	16	32
pole		
5		
dimension(mm)		
a	142	165
b	89	98
c	8-16	10-20
sw	42	50
cable nominal cross-section area(mm ²)		
1-2.5 2.5-6		




LK-215 LK-225

电 流 Current(A): 16A, 32A

电 压 Voltage(V): 110-130V-2P+E

防护等级 Protection degree: IP67



earth contact position	4h	
rated current(A)	16	32
pole		
3		
dimension(mm)		
a	133	162
b	78	98
c	6-15	10-20
sw	38	50
cable nominal cross-section area(mm ²)		
1-2.5 2.5-6		




LK-2132-4 LK-2232-4

电 流 Current(A): 16A, 32A

电 压 Voltage(V): 220-240V-2P+E

防护等级 Protection degree: IP67



earth contact position	EN	
rated current(A)	16	32
pole		
3		
dimension(mm)		
a	133	162
b	78	98
c	6-15	10-20
sw	38	50
cable nominal cross-section area(mm ²)		
1-2.5 2.5-6		




LK-2132 LK-2232

电 流 Current(A): 16A, 32A

电 压 Voltage(V): 380-415V-3P+E

防护等级 Protection degree: IP67



earth contact position	30	
rated current(A)	16	32
pole		
4		
dimension(mm)		
a	139	162
b	84	98
c	6-15	10-20
sw	38	50
cable nominal cross-section area(mm ²)		
1-2.5 2.5-6		




LK-2142 LK-2242

电 流 Current(A): 16A, 32A

电 压 Voltage(V): 220-380V-3P+N+E

防护等级 Protection degree: IP67



earth contact position	30	
rated current(A)	16	32
pole		
5		
dimension(mm)		
a	145	168
b	92	102
c	8-16	12-22
sw	42	50
cable nominal cross-section area(mm ²)		
1-2.5 2.5-6		




LK-2152 LK-2252



LK-2332-4 LK-2432-4

earth contact position	4h	
rated current(A)	63	125
poles	3	
dimension(mm)	a	261 305
	b	114 115
	c	30 44.5
	d	112 130
cable nominal cross-section area(mm ²)	6-16	16-50

电 流 Current(A): 63A, 125A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP67



LK-2332 LK-2432

earth contact position	4h	
rated current(A)	63	125
poles	3	
dimension(mm)	a	261 305
	b	114 115
	c	30 44.5
	d	112 130
cable nominal cross-section area(mm ²)	6-16	16-50

电 流 Current(A): 63A, 125A
电 压 Voltage(V): 220-250V~2P+E
防护等级 Protection degree: IP67



LK-2342 LK-2442

earth contact position	4h	
rated current(A)	63	125
poles	4	
dimension(mm)	a	261 305
	b	114 115
	c	30 44.5
	d	112 130
cable nominal cross-section area(mm ²)	6-16	16-50


电 流 Current(A): 63A, 125A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP67



LK-2352 LK-2452

earth contact position	4h	
rated current(A)	63	125
poles	5	
dimension(mm)	a	261 305
	b	114 115
	c	30 44.5
	d	112 130
cable nominal cross-section area(mm ²)	6-16	16-50

电 流 Current(A): 63A, 125A
电 压 Voltage(V): 220-300V~
240-415V~3P+N+E
防护等级 Protection degree: IP67




第二代工业用插座 Second Hide Direct Socket



LK-313-4 LK-323-4

earth contact position	4h	
rated current(A)	16	32
poles	3	
dimension(mm)	axb	75 75
	cxd	61 61
	e	22 24
	f	60 70
	g	5.5 5.5
	h	46 61
	i	87 95
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 11C-130V~2P+E
防护等级 Protection degree: IP44



LK-313 LK-323

earth contact position	4h	
rated current(A)	16	32
poles	3	
dimension(mm)	axb	75 75
	cxd	61 61
	e	22 24
	f	60 70
	g	5.5 5.5
	h	43 54
	i	87 95
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44






电 流 Current(A): 16A, 32A

电 压 Voltage(V): 380-415V~3P+E

防护等级 Protection degree: IP44



earth contact position	up	
rated current(A)	16	32
	pole 4	
dimension(mm)		
axb	75	75
cxh	61	61
e	17	24
f	59	69
g	5.5	5.5
h	48	55
i	88	95
cable nominal cross-section area(mm ²)	1-2.5	2.5-6




LK-314 LK-324

电 流 Current(A): 16A, 32A

电 压 Voltage(V): 220-380V~2P+N+E

防护等级 Protection degree: IP44



earth contact position	up	
rated current(A)	16	32
	pole 5	
dimension(mm)		
axb	75	75
cxh	61	61
e	17	22
f	59	71
g	5.5	5.5
h	53	60
i	92	100
cable nominal cross-section area(mm ²)	1-2.5	2.5-6




LK-315 LK-325

电 流 Current(A): 16A, 32A

电 压 Voltage(V): 110-130V~2P+E

防护等级 Protection degree: IP67



earth contact position	4h	
rated current(A)	16	32
	pole 3	
dimension(mm)		
a	75	75
b	75	75
c	61	61
d	61	61
e	18	24
f	63	70
g	43	54
h	43	54
i	5	5
cable nominal cross-section area(mm ²)	1-2.5	2.5-6




LK-3132-4 LK-3232-4

电 流 Current(A): 16A, 32A

电 压 Voltage(V): 220-240V~2P+E

防护等级 Protection degree: IP67



earth contact position	up	
rated current(A)	16	32
	pole 3	
dimension(mm)		
a	75	75
b	75	75
c	61	61
d	61	61
e	18	24
f	63	70
g	43	54
h	43	54
i	5	5
cable nominal cross-section area(mm ²)	1-2.5	2.5-6




LK-3132 LK-3232

电 流 Current(A): 16A, 32A

电 压 Voltage(V): 380-415V~3P+E

防护等级 Protection degree: IP67



earth contact position	up	
rated current(A)	16	32
	pole 4	
dimension(mm)		
a	75	75
b	75	75
c	61	61
d	61	61
e	18	24
f	63	73
g	48	55
h	48	55
i	5	5
cable nominal cross-section area(mm ²)	1-2.5	2.5-6




LK-3142 LK-3242

电 流 Current(A): 16A, 32A

电 压 Voltage(V): 220-380V~3P+N+E

防护等级 Protection degree: IP67



earth contact position	up	
rated current(A)	16	32
	pole 5	
dimension(mm)		
a	75	75
b	75	75
c	61	61
d	61	61
e	18	24
f	63	76
g	53	60
h	53	60
i	5	5
cable nominal cross-section area(mm ²)	1-2.5	2.5-6




LK-3152 LK-3252



LK-3332-4 LK-3432-4

earth contact position	4h	
rated current(I)	63	125
poles	3	
dimension(mm)	a	100
	b	100
	c	80
	d	80
	e	35
	f	96
	g	73
	h	73
	i	7
cable nominal cross-section area(mm ²)	6-16	16-50


电 流 Current(A): 63A, 125A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP67



LK-3332 LK-3432

earth contact position	4h	
rated current(I)	63	125
poles	3	
dimension(mm)	a	100
	b	100
	c	80
	d	80
	e	35
	f	96
	g	73
	h	73
	i	7
cable nominal cross-section area(mm ²)	6-16	16-50


电 流 Current(A): 63A, 125A
电 压 Voltage(V): 220-250V~2P+E
防护等级 Protection degree: IP67



LK-3342 LK-3442

earth contact position	4h	
rated current(I)	63	125
poles	4	
dimension(mm)	a	100
	b	100
	c	80
	d	80
	e	35
	f	96
	g	73
	h	73
	i	7
cable nominal cross-section area(mm ²)	6-16	16-50


电 流 Current(A): 63A, 125A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP67



LK-3352 LK-3452

earth contact position	4h	
rated current(I)	63	125
poles	5	
dimension(mm)	a	100
	b	100
	c	80
	d	80
	e	35
	f	96
	g	73
	h	73
	i	7
cable nominal cross-section area(mm ²)	6-16	16-50

电 流 Current(A): 63A, 125A
电 压 Voltage(V): 220-380V~3P+N+E
防护等级 Protection degree: IP67




第二代工业用插座 Second Hole Industrial Socket



LK-413-4 LK-423-4

earth contact position	4h	
rated current(I)	16	32
poles	3	
dimension(mm)	a	85
	b	85
	c	70
	d	70
	e	34
	f	60
	g	51
	h	56
	i	5.5
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP44



LK-413 LK-423

earth contact position	4h	
rated current(I)	16	32
poles	3	
dimension(mm)	a	85
	b	85
	c	70
	d	70
	e	34
	f	60
	g	51
	h	56
	i	5.5
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44





222



1993, 1994, 1995, 1996, 1997, 1998, 1999, 2000, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2030, 2031, 2032, 2033, 2034, 2035, 2036, 2037, 2038, 2039, 2040, 2041, 2042, 2043, 2044, 2045, 2046, 2047, 2048, 2049, 2050, 2051, 2052, 2053, 2054, 2055, 2056, 2057, 2058, 2059, 2060, 2061, 2062, 2063, 2064, 2065, 2066, 2067, 2068, 2069, 2070, 2071, 2072, 2073, 2074, 2075, 2076, 2077, 2078, 2079, 2080, 2081, 2082, 2083, 2084, 2085, 2086, 2087, 2088, 2089, 2090, 2091, 2092, 2093, 2094, 2095, 2096, 2097, 2098, 2099, 2100, 2101, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2114, 2115, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2123, 2124, 2125, 2126, 2127, 2128, 2129, 2130, 2131, 2132, 2133, 2134, 2135, 2136, 2137, 2138, 2139, 2140, 2141, 2142, 2143, 2144, 2145, 2146, 2147, 2148, 2149, 2150, 2151, 2152, 2153, 2154, 2155, 2156, 2157, 2158, 2159, 2160, 2161, 2162, 2163, 2164, 2165, 2166, 2167, 2168, 2169, 2170, 2171, 2172, 2173, 2174, 2175, 2176, 2177, 2178, 2179, 2180, 2181, 2182, 2183, 2184, 2185, 2186, 2187, 2188, 2189, 2190, 2191, 2192, 2193, 2194, 2195, 2196, 2197, 2198, 2199, 2200, 2201, 2202, 2203, 2204, 2205, 2206, 2207, 2208, 2209, 2210, 2211, 2212, 2213, 2214, 2215, 2216, 2217, 2218, 2219, 2220, 2221, 2222, 2223, 2224, 2225, 2226, 2227, 2228, 2229, 2230, 2231, 2232, 2233, 2234, 2235, 2236, 2237, 2238, 2239, 2240, 2241, 2242, 2243, 2244, 2245, 2246, 2247, 2248, 2249, 2250, 2251, 2252, 2253, 2254, 2255, 2256, 2257, 2258, 2259, 2260, 2261, 2262, 2263, 2264, 2265, 2266, 2267, 2268, 2269, 2270, 2271, 2272, 2273, 2274, 2275, 2276, 2277, 2278, 2279, 2280, 2281, 2282, 2283, 2284, 2285, 2286, 2287, 2288, 2289, 2290, 2291, 2292, 2293, 2294, 2295, 2296, 2297, 2298, 2299, 2300, 2301, 2302, 2303, 2304, 2305, 2306, 2307, 2308, 2309, 2310, 2311, 2312, 2313, 2314, 2315, 2316, 2317, 2318, 2319, 2320, 2321, 2322, 2323, 2324, 2325, 2326, 2327, 2328, 2329, 2330, 2331, 2332, 2333, 2334, 2335, 2336, 2337, 2338, 2339, 2340, 2341, 2342, 2343, 2344, 2345, 2346, 2347, 2348, 2349, 2350, 2351, 2352, 2353, 2354, 2355, 2356, 2357, 2358, 2359, 2360, 2361, 2362, 2363, 2364, 2365, 2366, 2367, 2368, 2369, 2370, 2371, 2372, 2373, 2374, 2375, 2376, 2377, 2378, 2379, 2380, 2381, 2382, 2383, 2384, 2385, 2386, 2387, 2388, 2389, 2390, 2391, 2392, 2393, 2394, 2395, 2396, 2397, 2398, 2399, 2400, 2401, 2402, 2403, 2404, 2405, 2406, 2407, 2408, 2409, 2410, 2411, 2412, 2413, 2414, 2415, 2416, 2417, 2418, 2419, 2420, 2421, 2422, 2423, 2424, 2425, 2426, 2427, 2428, 2429, 2430, 2431, 2432, 2433, 2434, 2435, 2436, 2437, 2438, 2439, 2440, 2441, 2442, 2443, 2444, 2445, 2446, 2447, 2448, 2449, 2450, 2451, 2452, 2453, 2454, 2455, 2456, 2457, 2458, 2459, 2460, 2461, 2462, 2463, 2464, 2465, 2466, 2467, 2468, 2469, 2470, 2471, 2472, 2473, 2474, 2475, 2476, 2477, 2478, 2479, 2480, 2481, 2482, 2483, 2484, 2485, 2486, 2487, 2488, 2489, 2490, 2491, 2492, 2493, 2494, 2495, 2496, 2497, 2498, 2499, 2500, 2501, 2502, 2503, 2504, 2505, 2506, 2507, 2508, 2509, 2510, 2511, 2512, 2513, 2514, 2515, 2516, 2517, 2518, 2519, 2520, 2521, 2522, 2523, 2524, 2525, 2526, 2527, 2528, 2529, 2530, 2531, 2532, 2533, 2534, 2535, 2536, 2537, 2538, 2539, 2540, 2541, 2542, 2543, 2544, 2545, 2546, 2547, 2548, 2549, 2550, 2551, 2552, 2553, 2554, 2555, 2556, 2557, 2558, 2559, 2560, 2561, 2562, 2563, 2564, 2565, 2566, 2567, 2568, 2569, 2570, 2571, 2572, 2573, 2574, 2575, 2576, 2577, 2578, 2579, 2580, 2581, 2582, 2583, 2584, 2585, 2586, 2587, 2588, 2589, 2590, 2591, 2592, 2593, 2594, 2595, 2596, 2597, 2598, 2599, 2600, 2601, 2602, 2603, 2604, 2605, 2606, 2607, 2608, 2609, 2610, 2611, 2612, 2613, 2614, 2615, 2616, 2617, 2618, 2619, 2620, 2621, 2622, 2623, 2624, 2625, 2626, 2627, 2628, 2629, 2630, 2631, 2632, 2633, 2634, 2635, 2636, 2637, 2638, 2639, 2640, 2641, 2642, 2643, 2644, 2645, 2646, 2647, 2648, 2649, 2650, 2651, 2652, 2653, 2654, 2655, 2656, 2657, 2658, 2659, 2660, 2661, 2662, 2663, 2664, 2665, 2666, 2667, 2668, 2669, 2670, 2671, 2672, 2673, 2674, 26



April 4th 1968



10



Source: *Survey of the U.S. Economy*, 1997, 1998, 1999, 2000, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2030, 2031, 2032, 2033, 2034, 2035, 2036, 2037, 2038, 2039, 2040, 2041, 2042, 2043, 2044, 2045, 2046, 2047, 2048, 2049, 2050, 2051, 2052, 2053, 2054, 2055, 2056, 2057, 2058, 2059, 2060, 2061, 2062, 2063, 2064, 2065, 2066, 2067, 2068, 2069, 2070, 2071, 2072, 2073, 2074, 2075, 2076, 2077, 2078, 2079, 2080, 2081, 2082, 2083, 2084, 2085, 2086, 2087, 2088, 2089, 2090, 2091, 2092, 2093, 2094, 2095, 2096, 2097, 2098, 2099, 2100, 2101, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2114, 2115, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2123, 2124, 2125, 2126, 2127, 2128, 2129, 2130, 2131, 2132, 2133, 2134, 2135, 2136, 2137, 2138, 2139, 2140, 2141, 2142, 2143, 2144, 2145, 2146, 2147, 2148, 2149, 2150, 2151, 2152, 2153, 2154, 2155, 2156, 2157, 2158, 2159, 2160, 2161, 2162, 2163, 2164, 2165, 2166, 2167, 2168, 2169, 2170, 2171, 2172, 2173, 2174, 2175, 2176, 2177, 2178, 2179, 2180, 2181, 2182, 2183, 2184, 2185, 2186, 2187, 2188, 2189, 2190, 2191, 2192, 2193, 2194, 2195, 2196, 2197, 2198, 2199, 2200, 2201, 2202, 2203, 2204, 2205, 2206, 2207, 2208, 2209, 2210, 2211, 2212, 2213, 2214, 2215, 2216, 2217, 2218, 2219, 2220, 2221, 2222, 2223, 2224, 2225, 2226, 2227, 2228, 2229, 2230, 2231, 2232, 2233, 2234, 2235, 2236, 2237, 2238, 2239, 2240, 2241, 2242, 2243, 2244, 2245, 2246, 2247, 2248, 2249, 2250, 2251, 2252, 2253, 2254, 2255, 2256, 2257, 2258, 2259, 2260, 2261, 2262, 2263, 2264, 2265, 2266, 2267, 2268, 2269, 2270, 2271, 2272, 2273, 2274, 2275, 2276, 2277, 2278, 2279, 2280, 2281, 2282, 2283, 2284, 2285, 2286, 2287, 2288, 2289, 2290, 2291, 2292, 2293, 2294, 2295, 2296, 2297, 2298, 2299, 2300, 2301, 2302, 2303, 2304, 2305, 2306, 2307, 2308, 2309, 2310, 2311, 2312, 2313, 2314, 2315, 2316, 2317, 2318, 2319, 2320, 2321, 2322, 2323, 2324, 2325, 2326, 2327, 2328, 2329, 2330, 2331, 2332, 2333, 2334, 2335, 2336, 2337, 2338, 2339, 2340, 2341, 2342, 2343, 2344, 2345, 2346, 2347, 2348, 2349, 2350, 2351, 2352, 2353, 2354, 2355, 2356, 2357, 2358, 2359, 2360, 2361, 2362, 2363, 2364, 2365, 2366, 2367, 2368, 2369, 2370, 2371, 2372, 2373, 2374, 2375, 2376, 2377, 2378, 2379, 2380, 2381, 2382, 2383, 2384, 2385, 2386, 2387, 2388, 2389, 2390, 2391, 2392, 2393, 2394, 2395, 2396, 2397, 2398, 2399, 2400, 2401, 2402, 2403, 2404, 2405, 2406, 2407, 2408, 2409, 2410, 2411, 2412, 2413, 2414, 2415, 2416, 2417, 2418, 2419, 2420, 2421, 2422, 2423, 2424, 2425, 2426, 2427, 2428, 2429, 2430, 2431, 2432, 2433, 2434, 2435, 2436, 2437, 2438, 2439, 2440, 2441, 2442, 2443, 2444, 2445, 2446, 2447, 2448, 2449, 2450, 2451, 2452, 2453, 2454, 2455, 2456, 2457, 2458, 2459, 2460, 2461, 2462, 2463, 2464, 2465, 2466, 2467, 2468, 2469, 2470, 2471, 2472, 2473, 2474, 2475, 2476, 2477, 2478, 2479, 2480, 2481, 2482, 2483, 2484, 2485, 2486, 2487, 2488, 2489, 2490, 2491, 2492, 2493, 2494, 2495, 2496, 2497, 2498, 2499, 2500, 2501, 2502, 2503, 2504, 2505, 2506, 2507, 2508, 2509, 2510, 2511, 2512, 2513, 2514, 2515, 2516, 2517, 2518, 2519, 2520, 2521, 2522, 2523, 2524, 2525, 2526, 2527, 2528, 2529, 2530, 2531, 2532, 2533, 2534, 2535, 2536, 2537, 2538, 2539, 2540, 2541, 2542, 2543, 2544, 2545, 2546, 2547, 2548, 2549, 2550, 2551, 2552, 2553, 2554, 2555, 2556, 2557, 2558, 2559, 2560, 2561, 2562, 2563, 2564, 2565, 2566, 2567, 2568, 2569, 2570, 2571, 2572, 2573, 2574, 2575, 2576, 2577, 2578, 2579, 2580, 2581, 2582, 2583, 2584, 2585, 2586, 2587, 2588, 2589, 2590, 2591, 2592, 2593, 2594, 2595, 2596, 2597, 2598, 2599, 2600, 2601, 2602, 2603, 2604, 2605, 2606, 2607, 2608, 2609, 2610, 2611, 2612, 2613, 2614, 2615, 2616, 2617, 2618, 2619, 2620, 2621, 2622, 2623, 2624, 2625, 2626, 2627, 2628, 2629, 2630, 2631, 2632, 2633, 2634, 2635, 2636, 2637, 2638, 2639, 2640, 2641, 2642, 2643, 2644, 2645, 2646, 2647, 2648, 2649, 2650, 2651, 2652, 2653, 2654, 2655, 2656, 2657, 2658, 2659, 2660, 2661, 2662, 2663, 2664, 2665, 2666, 2667, 2668, 2669, 2670, 2671, 2672, 2673, 2674, 2675, 2676



1




10



...F...

电 流 Current(A): 16A-32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP44




earth contact position rated current(A)		pH	
		16	32
	pole	4	
dimension(mm)	a	85	85
	b	85	85
	c	70	70
	d	70	70
	e	34	50
	f	58	60
	g	62	64
	h	5.8	76
	i		5.5
cable nominal cross-section area(mm ²)		1-2.5	2.5-6

LK-414 LK-424



LK-415 LK-425

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~
240-415V~ -3P+N+E
防护等级 Protection degree: IP44




earth contact position rated current (A)		no.	
		16	32
	pole	5	
dimension (mm)	a	85	85
	b	83	85
	c	70	70
	d	70	70
	e	34	50
	f	52	62
	g	64	70
	h	68	80
	i	5.5	5.5
cable nominal cross-section area (mm ²)		1-2.5	2.5-6




LK-4132-4 LK-4232-4

电 流 Current(A): 16A-32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP67



earth contact position rated current(A)	4h	
	16	32
	pcle	3
dimension(mm)	a	85
	b	85
	c	70
	d	70
	e	33
	f	60
	g	51
	h	55
	i	55
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP67



earth contact position rated current(A)	SA	
	16	32
	pole	3
dimension(mm)		
a	85	85
b	85	85
c	70	70
d	70	70
e	33	50
f	60	60
g	51	64
h	5.5	76
i		5.5
cabie nominal cross-section area(mm ²)	1-2.5	2.5-6

LK-4132 LK-4232


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 380-415V-3P+E
防护等级 Protection degree: IP67



earth contact position rated current(A)		16	
		16	32
	pole	4	
dimension(mm)	a	85	85
	b	85	85
	c	70	70
	d	70	70
	e	33	50
	f	60	60
	g	56	64
	h	65	76
	i	5.5	5.5
cable nominal cross-section area(mm ²)		1-2.5	2.5-6

LK-4142 LK-4242

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~
240-415V~ +3P+N+E
防护等级 Protection degree: IP67



earth contact position rated current(A)	ip		
		16	32
	pole	5	
dimension(mm)	a	85	85
	b	85	85
	c	70	70
	d	70	70
	e	33	50
	f	52	62
	g	64	70
	h	68	80
	i	5.5	5.5
cable nominal cross-section area(mm ²)		1-2.5	2.5-6


LK-4152 LK-4252



LK-4332-4 LK-4432-4

earth contact position	4h	
rated current(A)	63	125
pole	3	
dimension(mm)	a	101
	b	113
	c	80
	d	89
	e	64
	f	83
	g	79
	h	92
	i	7
cable nominal cross-section area(mm ²)	6-25	16-50


电 流 Current(A): 63A, 125A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP67



LK-4332 LK-4432

earth contact position	IP	
rated current(A)	63	125
pole	3	
dimension(mm)	a	101
	b	113
	c	80
	d	89
	e	64
	f	83
	g	79
	h	92
	i	7
cable nominal cross-section area(mm ²)	6-25	16-50


电 流 Current(A): 63A, 125A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP67



LK-4342 LK-4442

earth contact position	IP	
rated current(A)	63	125
pole	4	
dimension(mm)	a	101
	b	113
	c	80
	d	89
	e	64
	f	83
	g	79
	h	92
	i	7
cable nominal cross-section area(mm ²)	6-25	16-50

电 流 Current(A): 63A, 125A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP67



LK-4352 LK-4452

earth contact position	IP	
rated current(A)	63	125
pole	5	
dimension(mm)	a	101
	b	113
	c	80
	d	89
	e	64
	f	83
	g	79
	h	92
	i	7
cable nominal cross-section area(mm ²)	6-25	16-50

电 流 Current(A): 63A, 125A
电 压 Voltage(V): 220-380V~3P+N+E
240-415V~3P+N+E
防护等级 Protection degree: IP67





第二代带插片 Second Implant Socket



LK-513-4 LK-523-4

earth contact position	4h	
rated current(A)	16	32
pole	3	
dimension(mm)	a	133
	b	81
		143
		81
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP44



LK-513 LK-523


earth contact position	IP	
rated current(A)	16	32
pole	3	
dimension(mm)	a	133
	b	81
		143
		81
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44





电 流 Current(A): 16A, 32A
电 压 Voltage(V): 380V-415V~3P+E
防护等级 Protection degree: IP44




earth contact position	3P	
rated current(A)	16	32
pole		
4		
dimension(mm)		
a	133	143
b	81	81
cable nominal cross-section area(mm ²)		
1-2.5 2.5-6		



LK-514 LK-524

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~3P+N+E
防护等级 Protection degree: IP44




earth contact position	3P	
rated current(A)	16	32
pole		
5		
dimension(mm)		
a	133	143
b	81	81
cable nominal cross-section area(mm ²)		
1-2.5 2.5-6		



LK-515 LK-525

电 流 Current(A): 63A, 125A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP67




earth contact position	4H	
rated current(A)	63	125
pole		
3		
dimension(mm)		
a	193	223
b	123	143
c	153	165
d	111	133
e	21	17
f	8	8
g	288	317
h	127	140
PG	29	36
cable nominal cross-section area(mm ²)		
6-16 16-50		



LK-5332-4 LK-5432-4

电 流 Current(A): 63A, 125A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP67




earth contact position	3P	
rated current(A)	63	125
pole		
3		
dimension(mm)		
a	193	223
b	123	143
c	153	165
d	111	133
e	21	17
f	8	8
g	288	317
h	127	140
PG	29	36
cable nominal cross-section area(mm ²)		
6-16 16-50		



LK-5332 LK-5432

电 流 Current(A): 63A, 125A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP67




earth contact position	3P	
rated current(A)	63	125
pole		
4		
dimension(mm)		
a	193	223
b	123	143
c	153	165
d	111	133
e	21	17
f	8	8
g	288	317
h	127	140
PG	29	36
cable nominal cross-section area(mm ²)		
6-16 16-50		



LK-5342 LK-5442

电 流 Current(A): 63A, 125A
电 压 Voltage(V): 220-380V~3P+N+E
防护等级 Protection degree: IP67



earth contact position	3P	
rated current(A)	63	125
pole		
5		
dimension(mm)		
a	193	223
b	123	143
c	153	165
d	111	133
e	21	17
f	8	8
g	288	317
h	127	140
PG	29	36
cable nominal cross-section area(mm ²)		
6-16 16-50		



LK-5352 LK-5452

第二代工业插座 Second Industrial Socket



LK-613-4 LK-623-4



LK-613 LK-623



LK-614 LK-624



LK-615 LK-625



LK-6132-4 LK-6232-4



LK-6132 LK-6232

earth contact position	4h	
rated current(A)	16	32
pole		
3		
dimension(mm)	a	75
	b	75
	c	61
	d	61
	e	25
	f	41
	g	5
	h	43
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

earth contact position	5h	
rated current(A)	16	32
pole		
3		
dimension(mm)	a	75
	b	75
	c	61
	d	61
	e	25
	f	41
	g	5
	h	43
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


earth contact position	5h	
rated current(A)	16	32
pole		
4		
dimension(mm)	a	75
	b	75
	c	61
	d	61
	e	25
	f	41
	g	5
	h	43
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

earth contact position	5h	
rated current(A)	16	32
pole		
5		
dimension(mm)	a	75
	b	75
	c	61
	d	61
	e	20
	f	42
	g	5
	h	55
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


earth contact position	4h	
rated current(A)	16	32
pole		
3		
dimension(mm)	a	75
	b	61
	d	64
	e	74
	f	40
	g	5.5
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

earth contact position	5h	
rated current(A)	16	32
pole		
3		
dimension(mm)	a	75
	b	61
	d	64
	e	74
	f	40
	g	5.5
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V-2P+E
防护等级 Protection degree: IP44




电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V-2P+E
防护等级 Protection degree: IP44




电 流 Current(A): 16A, 32A
电 压 Voltage(V): 230-415V-3P+E
防护等级 Protection degree: IP44




电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V-3P+N+E
240-415V-3P+N+E
防护等级 Protection degree: IP44



电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V-2P+E
防护等级 Protection degree: IP67




电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V-2P+E
防护等级 Protection degree: IP67





电 流 Current(A): 16A, 32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP67




earth contact position		16	
rated current(A)		16	32
		pole	4
dimension(mm)		a	75
		b	61
		c	65
		d	63
		e	48
		f	5.5
		g	5.5
cable nominal cross-section area(mm ²)		1-2.5	2.5-6



LK-6142 LK-6242

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~3P+N+E
防护等级 Protection degree: IP67




earth contact position		16	
rated current(A)		16	32
		pole	5
dimension(mm)		a	75
		b	61
		c	65
		d	73
		e	90
		f	53
		g	5.5
cable nominal cross-section area(mm ²)		1-2.5	2.5-6



LK-6152 LK-6252

电 流 Current(A): 63A, 125A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP67




earth contact position		4h	
rated current(A)		63	125
		pole	3
dimension(mm)		a	100
		b	100
		c	80
		d	80
		e	13
		f	99
		g	73
		h	73
		i	6
cable nominal cross-section area(mm ²)		6-16	16-50



LK-6332-4 LK-6432-4

电 流 Current(A): 63A, 125A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP67




earth contact position		4h	
rated current(A)		63	125
		pole	3
dimension(mm)		a	100
		b	100
		c	80
		d	80
		e	13
		f	99
		g	73
		h	73
		i	6
cable nominal cross-section area(mm ²)		6-16	16-50



LK-6332 LK-6432

电 流 Current(A): 63A, 125A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP67




earth contact position		63	
rated current(A)		63	125
		pole	4
dimension(mm)		a	100
		b	100
		c	80
		d	80
		e	13
		f	99
		g	73
		h	73
		i	6
cable nominal cross-section area(mm ²)		6-16	16-50



LK-6342 LK-6442

电 流 Current(A): 63A, 125A
电 压 Voltage(V): 220-380V~3P+N+E
防护等级 Protection degree: IP67



earth contact position		63	
rated current(A)		63	125
		pole	5
dimension(mm)		a	100
		b	100
		c	80
		d	80
		e	13
		f	99
		g	73
		h	73
		i	6
cable nominal cross-section area(mm ²)		6-16	16-50



LK-6352 LK-6452


第二代工业插头 Industrial Plug



LKE-013X-4 LKE-023X-4

earth contact position	4h	
rated current(A)	16	32
pole	3	
dimension(mm)	a	58 80.7
	b	47 63
	c	7-15 10-20
	d	135 171
	e	104 130
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP44



LKE-013X LKE-023X

earth contact position	3h	
rated current(A)	16	32
pole	3	
dimension(mm)	a	58 80.7
	b	47 63
	c	7-15 10-20
	d	135 171
	e	104 130
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44



LKE-014X LKE-024X

earth contact position	5h	
rated current(A)	16	32
pole	4	
dimension(mm)	a	66.7 85
	b	53.5 63
	c	7-15 10-20
	d	140 171
	e	103 130
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP44



LKE-015X LKE-025X

earth contact position	5h	
rated current(A)	16	32
pole	5	
dimension(mm)	a	75 89
	b	60 70
	c	8-16 12-22
	d	145 178
	e	112 132
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~3P+N+E
防护等级 Protection degree: IP44



LKE-0132-4 LKE-0232-4

earth contact position	4h	
rated current(A)	16	32
pole	3	
dimension(mm)	a	75.5 99
	b	47 63
	c	7-15 10-20
	d	135 171
	e	98 125
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP67



LKE-0132 LKE-0232


earth contact position	3h	
rated current(A)	16	32
pole	3	
dimension(mm)	a	75.5 99
	b	47 63
	c	7-15 10-20
	d	139 175
	e	112 130
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP67





电 流 Current(A): 16A, 32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP57




earth contact position		4h	
rated current(A)		16	32
pole		4	
dimension(mm)			
a	83	99	
b	53.5	63	
φc	7-15	10-20	
d	143	175	
e	108	129	
cable nominal cross-section area(mm ²)		1-2.5	2.5-6



LKE-0142 LKE-0242

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~
240-415V~3P+N+E
防护等级 Protection degree: IP57




earth contact position		4h	
rated current(A)		16	32
pole		5	
dimension(mm)			
a	92	107	
b	60	70	
φc	8-16	12-22	
d	139	170	
e	95	124	
cable nominal cross-section area(mm ²)		1-2.5	2.5-6



LKE-0152 LKE-0252

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP44




earth contact position		4h	
rated current(A)		16	32
pole		3	
dimension(mm)			
a		104	114
b		80	80
c		161	192
cable nominal cross-section area(mm ²)		1-2.5	2.5-6

工业用插座 Industrial Socket



LKE-113X-4 LKE-123X-4

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44




earth contact position		4h	
rated current(A)		16	32
pole		3	
dimension(mm)			
a	104	114	
b	80	80	
c	181	192	
cable nominal cross-section area(mm ²)		1-2.5	2.5-6



LKE-113X LKE-123X

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP44




earth contact position		4h	
rated current(A)		16	32
pole		4	
dimension(mm)			
a	110	114	
b	80	80	
c	161	192	
cable nominal cross-section area(mm ²)		1-2.5	2.5-6



LKE-114X LKE-124X

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~
240-415V~3P+N+E
防护等级 Protection degree: IP44



earth contact position		4h	
rated current(A)		16	32
pole		5	
dimension(mm)			
a	110	141	
b	80	80	
c	181	192	
cable nominal cross-section area(mm ²)		1-2.5	2.5-6




LKE-115X LKE-125X



LKE-1132-4 LKE-1232-4

earth contact position	4h	
rated current(A)	16	32
pole	3	
dimension(mm)		
a	95	105
b	80	102
c	193	203
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 11C-130V~2P+E
防护等级 Protection degree: IP67



LKE-1132 LKE-1232

earth contact position	4h	
rated current(A)	16	32
pole	3	
dimension(mm)		
a	95	105
b	75	75
c	193	203
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP67



LKE-1142 LKE-1242

earth contact position	4h	
rated current(A)	16	32
pole	4	
dimension(mm)		
a	100	105
b	75	75
c	185	203
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP67



LKE-1152 LKE-1252

earth contact position	4h	
rated current(A)	16	32
pole	5	
dimension(mm)		
a	100	105
b	75	75
c	185	200
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~3P+N+E
240-415V~
防护等级 Protection degree: IP67




工业连接器 Industrial Connector



LKE-213X-4h LKE-223X-4h

earth contact position	4h	
rated current(A)	16	32
pole	3	
dimension(mm)		
a	83	102
b	60	82.5
c	150	195
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP44



LKE-513 LKE-523


earth contact position	4h	
rated current(A)	16	32
pole	3	
dimension(mm)		
a	83	102
b	60	82.5
c	155	195
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44






电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~ 3P+N+PE
防护等级 Protection degree: IP44




earth contact position	3P	
rated current(A)	16	32
pole		
4		
dimension(mm)		
a	95	102
b	68	82.5
c	165	195
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~ 3P+N+PE
防护等级 Protection degree: IP44




earth contact position	3P	
rated current(A)	16	32
pole		
5		
dimension(mm)		
a	100	110
b	76	90
c	160	200
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP67




earth contact position	4h	
rated current(A)	16	32
pole		
3		
dimension(mm)		
a	79	102
b	77	102
c	152	205
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP67




earth contact position	3P	
rated current(A)	16	32
pole		
3		
dimension(mm)		
a	79	102
b	77	102
c	152	205
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 380-415V~3P+N+PE
防护等级 Protection degree: IP67



earth contact position	3P	
rated current(A)	16	32
pole		
4		
dimension(mm)		
a	88	102
b	88	102
c	158	205
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~ 3P+N+PE
防护等级 Protection degree: IP67



earth contact position	3P	
rated current(A)	16	32
pole		
5		
dimension(mm)		
a	97	109
b	90	103
c	160	210
cable nominal cross-section area(mm ²)	1-2.5	2.5-6



LKE-214X LKE-224X



LKE-215X LKE-225X



LKE-2132-4h LKE-2232-4h



LKE-2132 LKE-2232



LKE-2142 LKE-2242



LKE-2152 LKE-2252


工业插座 Industrial Socket



LKE-313X-4 LKE-323X-4

earth contact position	4h	
rated current(A)	16	32
	pole 3	
dimension(mm)		
a	93	103
b	51.5	58
c	34	39
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V-2P+E
防护等级 Protection degree: IP44



LKE-313X LKE-323X

earth contact position	4h	
rated current(A)	16	32
	pole 3	
dimension(mm)		
a	93	103
b	51.5	58
c	34	39
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V-2P+E
防护等级 Protection degree: IP44



LKE-314X LKE-324X

earth contact position	4h	
rated current(A)	16	32
	pole 4	
dimension(mm)		
a	100	103
b	51.5	58
c	34	39
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 380-415V-3P+E
防护等级 Protection degree: IP44



LKE-315X LKE-325X

earth contact position	4h	
rated current(A)	16	32
	pole 5	
dimension(mm)		
a	101	110
b	51.5	58
c	34	39
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V-3P+N+E
240-415V-3P+N+E
防护等级 Protection degree: IP44



LKE-3132-3 LKE-3232-4

earth contact position	4h	
rated current(A)	16	32
	pole 3	
dimension(mm)		
a	81	99
b	56.5	66
c	32	39
d	77	102
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V-2P+E
防护等级 Protection degree: IP67



LKE-3132 LKE-3232


earth contact position	4h	
rated current(A)	16	32
	pole 3	
dimension(mm)		
a	81	99
b	56.5	66
c	32	38
d	77	102
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V-2P+E
防护等级 Protection degree: IP67






电 流 Current(A): 16A 32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP67



earth contact position	3P	
rated current(A)	16	32
pole		
4		
dimension(mm)		
a	88	99
b	55.5	66
c	33.5	39
d	83	102
cable nominal cross-section area(mm ²)		
	1-2.5	2.5-6

LKE-3142 LKE-3242


电 流 Current(A): 16A 32A
电 压 Voltage(V): 220-280V~3P+N+E
防护等级 Protection degree: IP67



earth contact position	3P	
rated current(A)	16	32
pole		
5		
dimension(mm)		
a	96	104
b	55.5	70
c	33.5	39
d	96	109
cable nominal cross-section area(mm ²)		
	1-2.5	2.5-6

LKE-3152 LKE-3252

电 流 Current(A): 16A 32A
电 压 Voltage(V): 116-130V~3P+E
防护等级 Protection degree: IP44




earth contact position	4h	
rated current(A)	16	32
pole		
3		
dimension(mm)		
a	89	105
b	88	109
c	44	53
cable nominal cross-section area(mm ²)		
	1-2.5	2.5-6

工业插座 Industrial Socket



LKE-413X-4 LKE-423X-4

电 流 Current(A): 16A 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44




earth contact position	3h	
rated current(A)	16	32
pole		
3		
dimension(mm)		
a	89	105
b	88	113
c	44	53
cable nominal cross-section area(mm ²)		
	1-2.5	2.5-6



LKE-413X LKE-423X

电 流 Current(A): 16A 32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP44




earth contact position	3h	
rated current(A)	16	32
pole		
4		
dimension(mm)		
a	97	105
b	91	113
c	41	53
cable nominal cross-section area(mm ²)		
	1-2.5	2.5-6



LKE-414X LKE-424X

电 流 Current(A): 16A 32A
电 压 Voltage(V): 220-280V~3P+N+E
防护等级 Protection degree: IP44



earth contact position	3h	
rated current(A)	16	32
pole		
5		
dimension(mm)		
a	103	112
b	94	103
c	41	41
cable nominal cross-section area(mm ²)		
	1-2.5	2.5-6




LKE-415X LKE-425X



LKE-4132-4 LKE-4232-4

earth contact position	4h	
rated current(A)	16	32
pole	3	
dimension(mm)		
a	85	99
b	90	114
c	41	53
d	77	101
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP67



LKE-4132 LKE-4232

earth contact position	4h	
rated current(A)	16	32
pole	3	
dimension(mm)		
a	85	99
b	90	114
c	41	53
d	77	101
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP67



LKE-4142 LKE-4242

earth contact position	4h	
rated current(A)	16	32
pole	4	
dimension(mm)		
a	91	99
b	93	114
c	41	53
d	83	101
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP67



LKE-4152 LKE-4252

earth contact position	4h	
rated current(A)	16	32
pole	5	
dimension(mm)		
a	98	105
b	94	110
c	41	41
d	96	108
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~3P+N+E
240-415V~
防护等级 Protection degree: IP67





100V 10A 200W



250V 15A 375W



400V 10A 400W



300V 10A 300W



100V 15A 150W



250V 15A 375W



300V 15A 450W



300V 15A 450W



300V 15A 450W



产品型号
Code: LK-013X/213X
电流(A)
Nominal current(A): 16A
输入
Input: 220V
输出
Output: 220V
极数
Number of poles: 2P+E
防护等级
Protection degree: IP44



产品型号
Code: LK-014X/214X
电流(A)
Nominal current(A): 16A
输入
Input: 330V
输出
Output: 360V
极数
Number of poles: 3P+E
防护等级
Protection degree: IP44

多功能插座 Multifunctional Socket



电流
Nominal current(A): 16A
电压
Nominal voltage(V): 220V-240V-
极数
No. poles: 2P+E
型号
Code: LK-012
防护等级
Protection degree: IP44



电流
Nominal current(A): 16A
电压
Nominal voltage(V): 220V-240V-
极数
No. poles: 2P+E
型号
Code: LK-112
防护等级
Protection degree: IP44



电流
Nominal current(A): 16A
电压
Nominal voltage(V): 220V-240V-
极数
No. poles: 2P+E
型号
Code: LK-312
防护等级
Protection degree: IP44



产品型号
Code: LK-0132/2132
电流(A)
Nominal current(A): 16A
输入
Input: 220V
输出
Output: 220V
极数
Number of poles: 2P+E
防护等级
Protection degree: IP67



产品型号
Code: LK-0242/2242
电流(A)
Nominal current(A): 32A
输入
Input: 380-415V
输出
Output: 380-415V
极数
Number of poles: 3P+E
防护等级
Protection degree: IP67



电流
Nominal current(A): 16A
电压
Nominal voltage(V): 220V-240V-
极数
No. poles: 2P+E
型号
Code: LK-312M
防护等级
Protection degree: IP55



电流
Nominal current(A): 16A
电压
Nominal voltage(V): 220V-240V-
极数
No. poles: 2P+E
型号
Code: LK-312
防护等级
Protection degree: IP44



电流
Nominal current(A): 16A
电压
Nominal voltage(V): 220V-240V-
极数
No. poles: 2P+E
型号
Code: LK-312
防护等级
Protection degree: IP55

多功能插座 Multifunctional Socket



型号
Code: LK-1012-4
输入 1 plug 16A
Input: 110V 2P+E
输出 2 Connector
Output: 16A 110V 2P+E
防护等级
Protection degree: IP44
颜色
Color: Yellow



型号
Code: LK-1014/214
输入 1 plug 16A
Input: 380V 3P+E
输出 3 Connector
Output: 16A 380V 3P+E
防护等级
Protection degree: IP44
颜色
Color: Red



型号
Code: LK-1012
输入 1 plug 16A
Input: 220V 2P+E
输出 2 Connector
Output: 16A 220V 2P+E
防护等级
Protection degree: IP44
颜色
Color: Blue



型号
Code: LK-1013-4
输入 1 plug 16A
Input: 110V 2P+E
输出 3 Connector
Output: 16A 110V 2P+E
防护等级
Protection degree: IP44
颜色
Color: Yellow



型号
Code: LK-1012/4
输入 1 plug 16A
Input: 380V 3P+E
输出 2 Connector
Output: 16A 380V 3P+E
防护等级
Protection degree: IP44
颜色
Color: Red



型号
Code: LK-1013
输入 1 plug 16A
Input: 220V 2P+E
输出 3 Connector
Output: 16A 220V 2P+E
防护等级
Protection degree: IP44
颜色
Color: Blue



型号
Code: LK-1013-4
输入 1 plug 16A
Input: 110V 2P+E
输出 3 Connector
Output: 16A 110V 2P+E
防护等级
Protection degree: IP44
颜色
Color: Yellow



型号
Code: LK-1023
输入 1 plug 32A
Input: 220V 2P+E
输出 3 Connector
Output: 32A 220V 2P+E
防护等级
Protection degree: IP44
颜色
Color: Blue



型号
Code: LK-1013
输入 1 plug 16A
Input: 220V 2P+E
输出 3 Connector
Output: 16A 220V 2P+E
防护等级
Protection degree: IP44
颜色
Color: Blue



型号
Code: LK-1024/224
输入 1 plug 32A
Input: 380V 3P+E
输出 3 Connector
Output: 32A 380V 3P+E
防护等级
Protection degree: IP44
颜色
Color: Red



200V 16A/32A



230V 16A/32A



400V 16A/32A



200V 16A/32A



230V 16A/32A



230V 16A/32A



230V 16A/32A



230V 16A/32A



230V 16A/32A



产品型号 Code	LK-312	LK-313
数量Qty	2只	2只
箱体尺寸(mm)	340 × 220 × 150	



产品型号 Code	LK-312	LK-425
数量Qty	3只	2只
箱体尺寸(mm)	380 × 280 × 130	



产品型号 Code	LK-324X	LK-523X
数量Qty	3只	3只
箱体尺寸(mm)	380 × 280 × 140	



产品型号 Code	数量Qty
LK-313X	4只
LK-315X	4只
LK-3252	3只
LK-034	1只
LK-634	1只
箱体尺寸(mm)	340 × 376 × 330



产品型号 Code	LK-1142	LK-1252
数量Qty	2只	2只
箱体尺寸(mm)	520 × 300 × 160	



产品型号 Code	数量Qty
LK-312	4只
LK-1252	4只
LK-015X	1只
箱体尺寸(mm)	230 × 300 × 287