

power supply module Modicon Quantum - 125 V DC100..150 V standalone - 0.3..3 A

140CPS51100

- Discontinued on: 31 December 2022
- 1 To be end-of-service on: 31 December 2030

(!) To be discontinued

Main

Range of product	Modicon Quantum automation platform
Product or component type	Power supply module
Power supply type	Standalone

Complementary

· · · · · · · · · · · · · · · · · ·	
Input voltage	125 V (100150 V) DC
Input current	400 mA at 125 V
Inrush current	10 A
Maximum input power interruption	1 ms
Associated fuse rating	0.75 A, slow-blow
Output voltage	5.1 V DC
Power supply output current	0.33 A standalone
Output overvoltage protection	Internal
Output overload protection	Internal
Power dissipation	2 + (3 x lout) where lout is in A
Local signalling	1 LED (green) for power (PWR OK)
Marking	CE
Module format	Standard
Net weight	0.65 kg

Environment

Standards	CSA C22.2 No 142 UL 508
Product certifications	cUL FM Class 1 Division 2
Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 802000 MHz conforming to IEC 801-3

Disclaimer. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Ambient air temperature for operation	060 °C
Ambient air temperature for storage	-4085 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	16.3 cm
Package 1 Width	4.5 cm
Package 1 Length	31.2 cm
Package 1 Weight	734 g
Unit Type of Package 2	S03
Number of Units in Package 2	7
Package 2 Height	30 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	5.41 kg

Offer Sustainability

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


Contractual warranty

Warranty 18 months

Dimensions Drawings

Racks for Modules Mounting

Dimensions of Modules and Racks

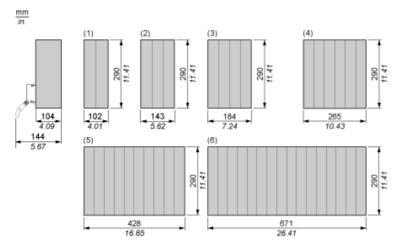

- 2 slots 3 slots 4 slots (1) (2) (3) (4) (5) (6)
- 6 slots
- 10 slots
- 16 slots


Product data sheet

140CPS51100

Connections and Schema

125 Vdc/3 A Power Supply Module

Wiring Diagram



Recommended replacement(s)

140CPS51100 is replaced by:



power supply module X80 - 125 V DC - for extended temperature BMXCPS3540T