

Energy Power Save CO.,LTD.


442/2 Chaan Road, Thung Watdon Sathon

Bangkok Thailand 10120

www.siamenergysaving.com

Tel: +66 (02) 114 7145-9 Auto 5Line

Service Call Center: +66 (096) 4501250

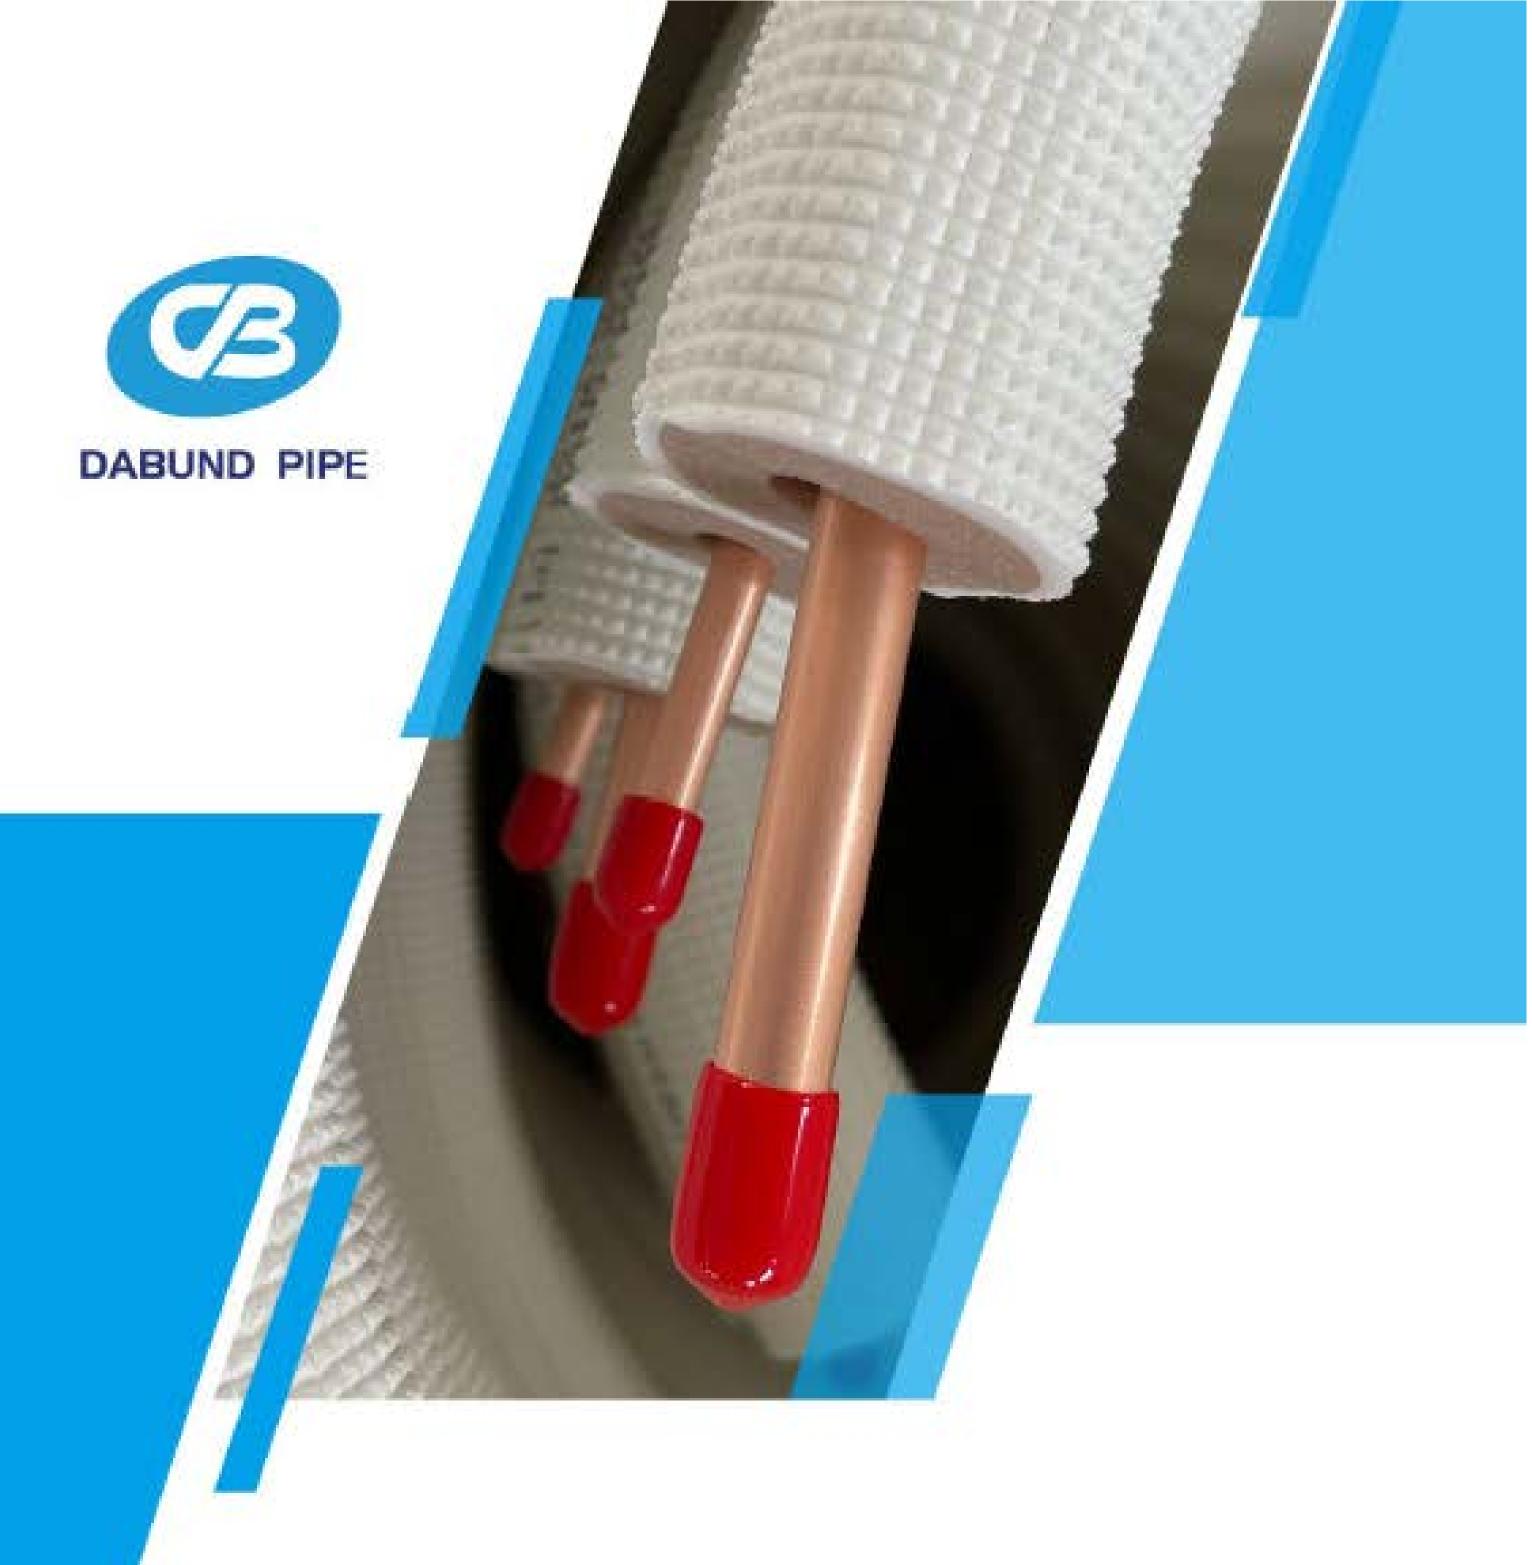

INSULATED COPPER PIPE



ผู้นำเข้าและจัดจำหน่าย www.7-mars.com



Where is AC Pipe

There is Dabund Pipe

SHIP WORLDWIDE North America Europe Middle East

Asia

Africa



DIRECTORY

- ABOUTUS
 - Certificate
- Factory&Campany
- MAIN PRODUCT
- White PE copper line set
- Black rubber copper line set
- White PE AC installation kit
- Black rubber AC installation kit
- Insulated aluminum pipe kit
- ACACCESSIOUS
- Line Set Cover
- Air Conditioner Bracket
- The Other Air Conditioner Parts



COMPANY INFORMATION

Welcome to our company

Changzhou Dabund Pipe CO.,LTD is build since 2015 year, one professional manufacturer and trading company of HVAC&R products,but actually we have factory since 2008 year. We are in Changzhou city Jiangsu PRO.It is in the center of Yangtze river delta,only 1 hour to Nanjing or Shanghai by train.Our main product is Air Conditioner Installation Pipes,including Insulated Copper Pipe Roll and Copper Pipe Line Set; Air Conditioner Aluminium Pipe Set, Air Conditioner Installation Pipe Kit with accessories.

We exported to many countries, like North America, Europe, South Africa, Middle East, Latin America and so on. We control the productions, so can offer you good quality with good price. We hope DABUND PIPE can make air conditioners work very well for cooling and hotting all over the world. We welcome you come to visit our company at any time. Enjoy Dabund Enjoy Life.














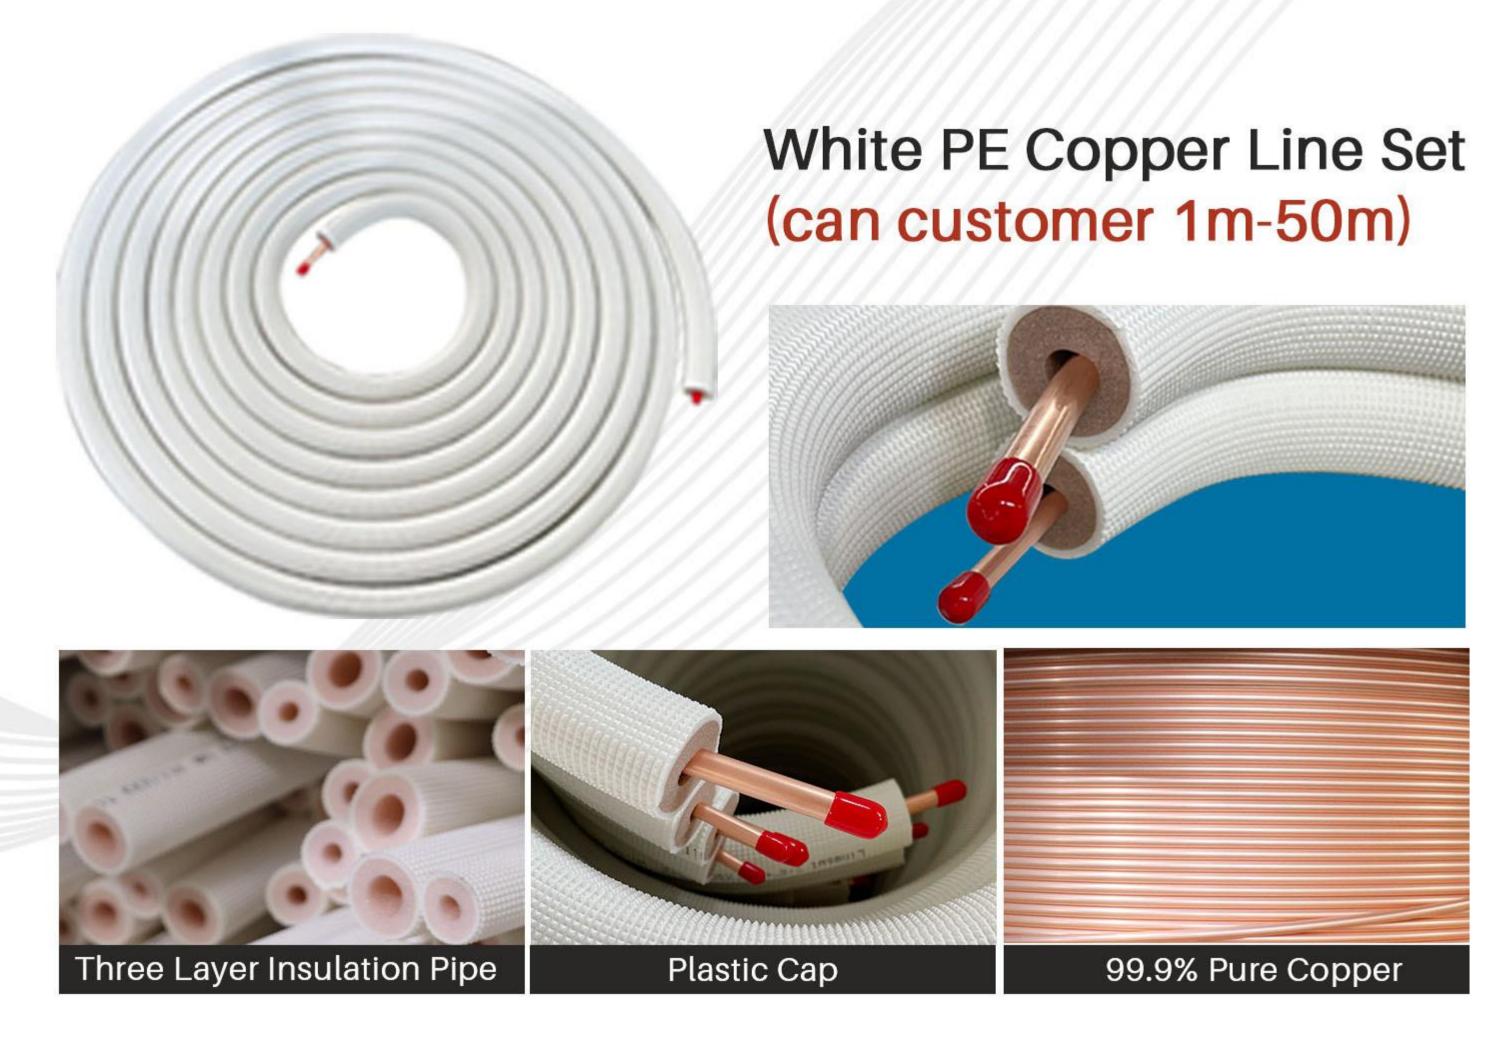

White PE Insulation Pipe

With embossed polyethyene film, climate resistant foam, and thickened insulated cotton, this three-layer insulated mini split copper line set is corrosion-resistant, fireproofing, flame-retarded, thermal insulation, waterproof, shockproof, sound absorption and durable.

Emperature resistant -40°C ~ 120°C.(Polypropylene & UV Resistant, ASTM E 84, UL94, ASTM D1056 and ASTM G 21)

Copper Tube


99.9% pure copper (meets ASTM B280 and C12200 standard), specially soft annealed, easy to bend without kink.

Plastic Cap

Keep the inner wall of the pipe clean and prevent dirt from entering the pipe.

Works for every Air Conditioning & Refrigeration Application including Ductless



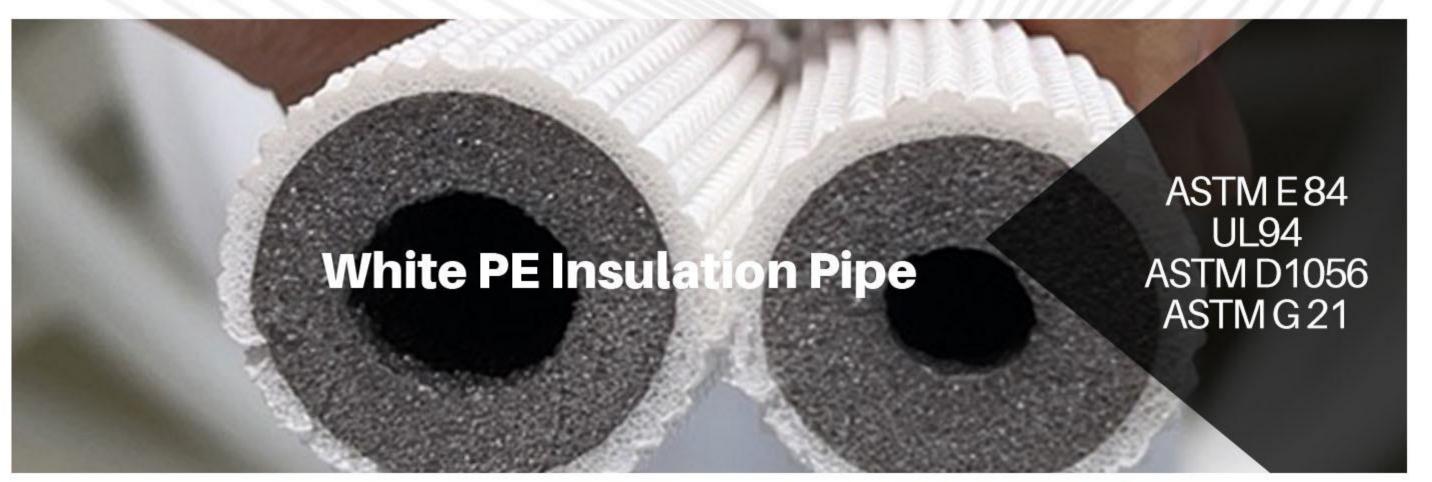












Black Rubber AC Line Set (can customize 1m-50m)

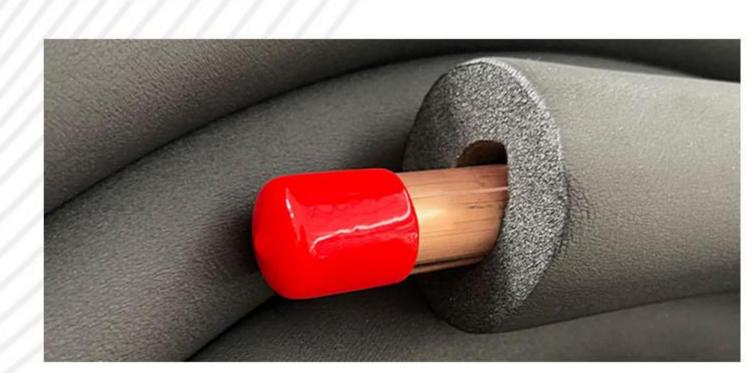







Black Rubber Insulation Pipe

Pipe Insulation, Material Black Rubber, Temp Range -40 Degrees to 120 Degrees. (Polypropylene & UV Resistant, meets ASTM E 84, UL94, ASTM D1056 and ASTM G 21)

The pipe insulation has a better function of moisture condensation. Insulation material is both the insulation layer and moisture-proof layer.

There is no need to drop the water vapor permeation protective layer so that it has a better moisture condensation function.


Copper Tube


99.9% pure copper(meets ASTM B280 and C12200 standard), specially soft annealed, easy to bend without kink.


Plastic Cap

Keep the inner wall of the pipe clean and prevent dirt from entering the pipe.

Works for every Air Conditioning & Refrigeration Application including Ductless

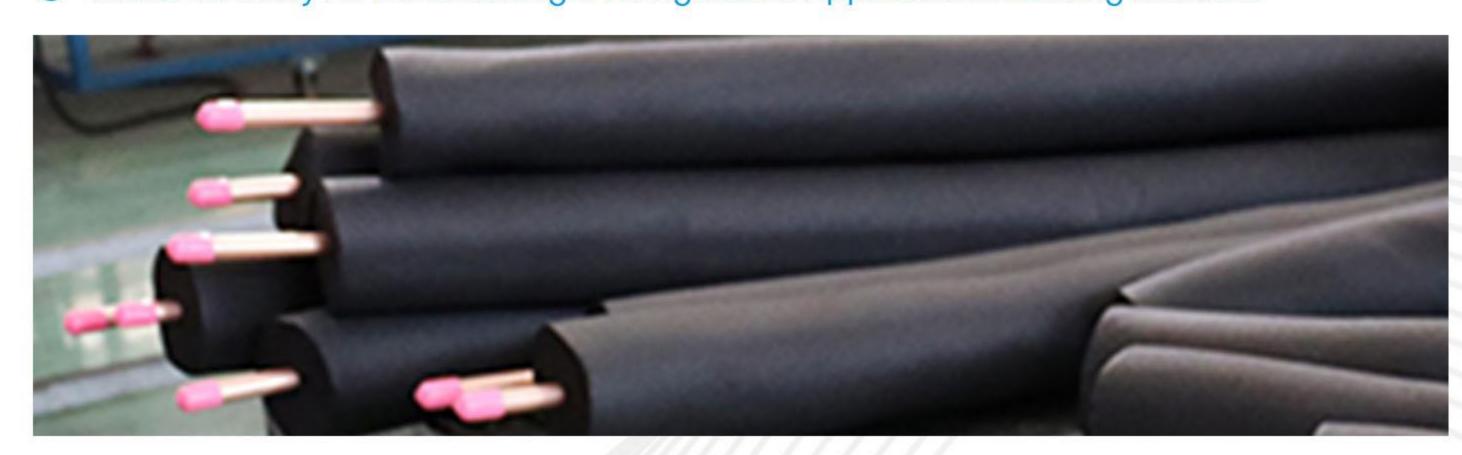

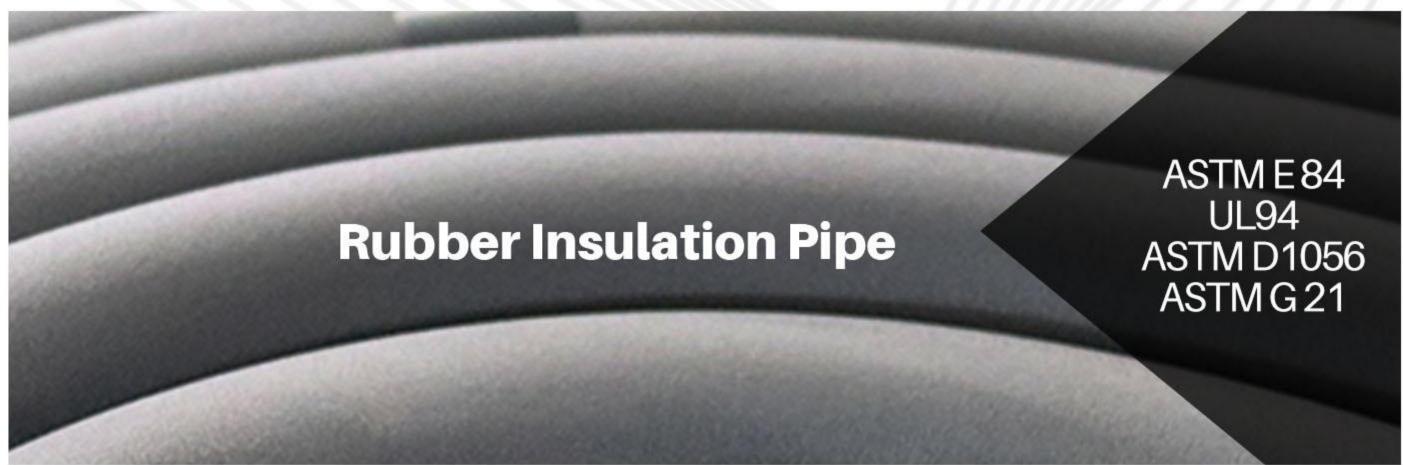

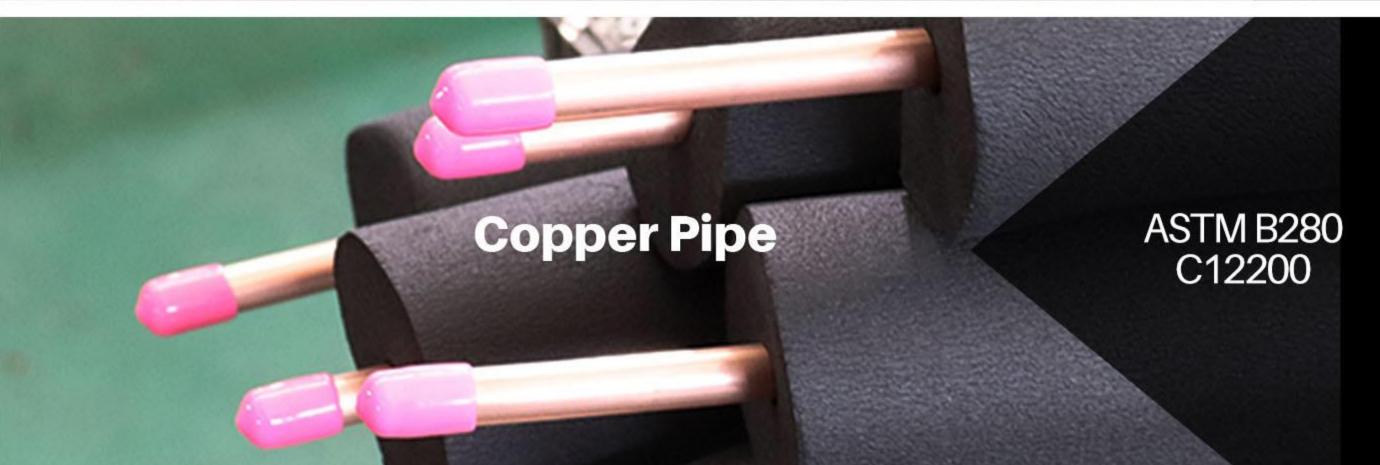









White PE AC Installation Kit (can customer 1m-10m)















Dabund sided



Tap



Wall Cover

Key Features of White PE Mini Split Installation Kit

- 1.Mini Split Installation Kit including one set air conditioner insulated copper pipe, and other accessories, like communication wire cable, drain hose 3m, wall pipe and cover and the other necessary parts.
- 2. Both of the two copper pipe end do flaring and nuts.
- 3. White PE thickness is 3/8" 1/2" 3/4" 1" or 8mm 9mm 10mm 13mm 19mm 25.4mm.
- 4. For the AC Installation kit, most popular size is 3m 4m and 5m. Europe want 6m 7m 8m 10m.
- 5. For the insulation we have SGS test report including ASTM E 84, UL 94, ASTM D1056, ASTM G 21, and copper pipe meets ASTM B280 AND C12200.
- Works for every Air Conditioning & Refrigeration Application including Ductless





Black Rubber AC Installation Kit (can customer 1m-10m)















Dabund sided





Wall Cover

Key Features of White PE Mini Split Installation Kit

- 1.Mini Split Installation Kit including one set air conditioner insulated copper pipe, and other accessories, like communication wire cable, drain hose 3m, wall pipe and cover and the other necessary parts.
- 2. Both of the two copper pipe end do flaring and nuts.
- 3. Black Rubber thickness is 1/2" 3/4" 1" or 13mm 17mm 19mm 25.4mm.
- 4. For the AC Installation kit, most popular size is 3m 4m and 5m. Europe want 6m 7m 8m 10m.
- 5. For the insulation we have SGS test report including ASTM E 84, UL 94, ASTM D1056, ASTM G 21, and copper pipe meets ASTM B280 AND C12200.












Insulated Aluminum Pipe(can customer 1m-10m)



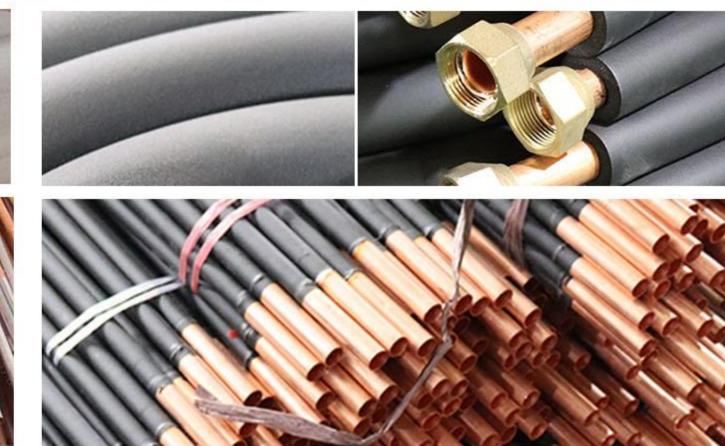


Key Features of White PE Insulated Aluminum Pipe

- 1. Aluminum copper pipe including one set air conditioner insulated copper aluminum pipe and other accessories, like communication wire cable, drain hose 3m, wall pipe and cover and the other necessary parts.
- 2.Both of the two ends are copper pipe, length is 1m-15cm. The rest is Pure Aluminum Pipe, 1000series 1070 grade aluminum. Soft aluminum pipe easy to be bend to be flexible.
- 3. PVC platic pipe is coverd whole aluminum pipe, to protect the aluminum pipe not to be wet, keep the good qualiy.
- 4. For the AC Installation kit, most popular size is 3m 4m and 5m. Europe want 6m 7m 8m 10m.
 5. For the insulation we have SGS test report including ASTM E 84, UL 94, ASTM D1056, ASTM G 21, and copper pipe meets ASTM B280 AND C12200.
- Works for every Air Conditioning & Refrigeration Application including Ductless







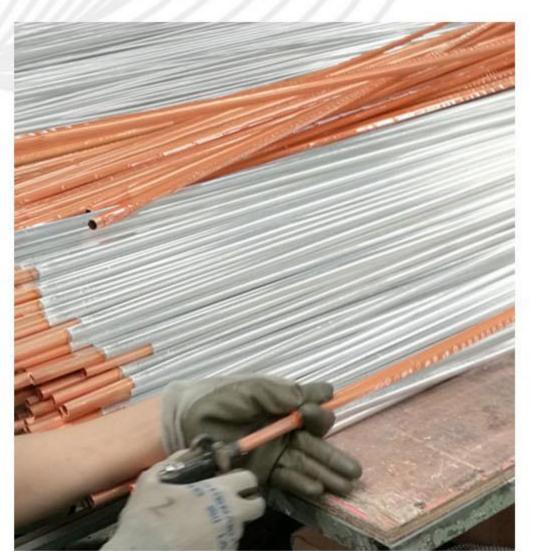







Model: Copper Line Set

DABUND PIPE

Material: Copper C12200

Let set Insulation: High melting point low-density polyethylene

Heat resistance: heat resistant 120-celsius degree

Shrinking protection: PE fire retardant

Certificate: ASTM E 84, UL 94, ASTM D1056, ASTM G 21, ASTM B280 AND C12200.

Size Table

| Size | Copper pipe | Thickness Insulation Size | Length available | Flame resistant |
|---------|-----------------------|------------------------------|------------------|--------------------|
| 1/4+3/8 | 6.35x0.75+9.52x0.8mm | 3/8"/1/2"/3/4"/1 | 1m - 50m | M1/B1 |
| 1/4+1/2 | 6.35x0.75+12.7x0.8mm | 3/8"/1/2"/3/4"/1 | 1m - 50m | M1/B1 |
| 1/4+5/8 | 6.35x0.75+15.88x0.9mm | 3/8"/1/2"/3/4"/1 | 1m - 50m | M1/B1 |
| 3/8+5/8 | 9.52x0.8+15.88x0.9mm | 3/8"/1/2"/3/4"/1 | 1m - 50m | M1/B1 |
| 3/8+3/4 | 9.52x0.8+19.05x0.9mm | 3/8"/1/2"/3/4"/1 | 1m - 50m | M1/B1 |
| 1/2+3/4 | 12.7x0.8+19.05x0.9mm | 3/8"/1/2"/3/4"/1 | 1m - 50m | M1/B1 |
| 3/8+7/8 | 9.52x0.8+22.22x1.14mm | 3/8"/1/2"/3/4"/1 | 1m - 50m | M1/B1 |

* 1m - 10m Copper line set both of the two copper pipe end can do flaring and nuts.

Print information on the pipe

for example: Lineset 1/4 +3/8 x 50FT ASTM B280

Lineset 1/4"+3/8"X50FT 1/2" Uhite ASIM 8280

Copper line set

Model: AC Installation Kit

Material: Copper C12200/Copper C12200 Aluminum 1070 alloy

Let set Insulation: High melting point low-density polyethylene

Heat resistance: heat resistant 120-celsius degree

Shrinking protection: PE fire retardant

Certificate: ASTM E 84, UL 94, ASTM D1056, ASTM G 21, ASTM B280 AND C12200.


Size Table

| Size | Copper pipe | Thickness Insulation Size | Length available | Flame resistant |
|---------|-----------------------|------------------------------|------------------|--------------------|
| 1/4+3/8 | 6.35x0.75+9.52x0.8mm | 3/8"/1/2"/3/4"/1 | 1m - 10m | M1/B1 |
| 1/4+1/2 | 6.35x0.75+12.7x0.8mm | 3/8"/1/2"/3/4"/1 | 1m - 10m | M1/B1 |
| 1/4+5/8 | 6.35x0.75+15.88x0.9mm | 3/8"/1/2"/3/4"/1 | 1m - 10m | M1/B1 |
| 3/8+5/8 | 9.52x0.8+15.88x0.9mm | 3/8"/1/2"/3/4"/1 | 1m - 10m | M1/B1 |
| 3/8+3/4 | 9.52x0.8+19.05x0.9mm | 3/8"/1/2"/3/4"/1 | 1m - 10m | M1/B1 |
| 1/2+3/4 | 12.7x0.8+19.05x0.9mm | 3/8"/1/2"/3/4"/1 | 1m - 10m | M1/B1 |
| 3/8+7/8 | 9.52x0.8+22.22x1.14mm | 3/8"/1/2"/3/4"/1 | 1m - 10m | M1/B1 |

* Both of the two copper pipe end do flaring and nuts.

Carton Box

Customized logo, carton color and size

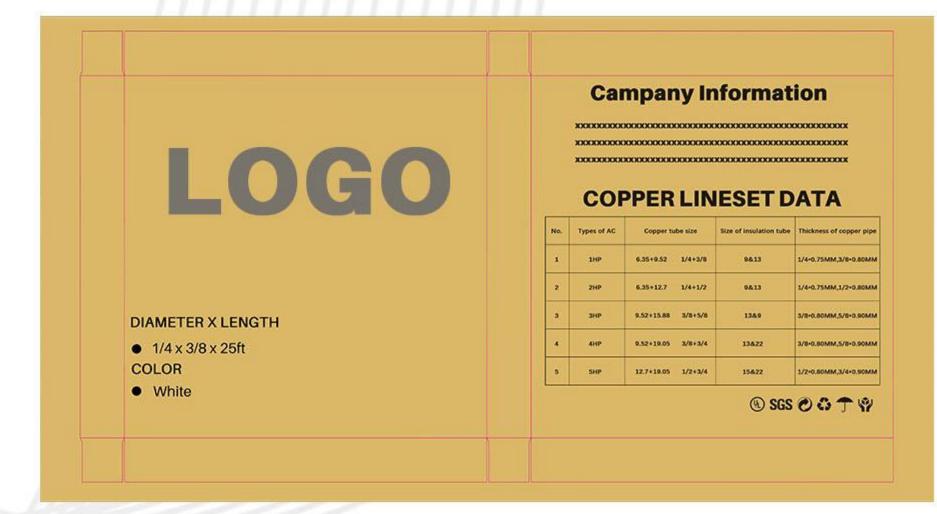

Carton Box



AC Accessious(Line Set Cover, 75*65mm, 100*65mm, 130*90mm)

Model: Line set cover

Material: PVC

Suit series: 75,100,130

Component: Straight Duct, Flexible Duct, Wall Cover, Level Bend,


Connector, Upright Bend, End Cap, Elbow Corner

Function: Line Set Cover Kit is for most Central Air Conditioner system,


Heat Pump.

| Number | Name | Picture | |
|--------|---------------|---------|--|
| 1 | Wall Cover | | |
| 2 | Straight Duct | | |
| 3 | Level Bend | | |
| 4 | Connector | | |
| 5 | Flexible Duct | | |
| 6 | Upright Bend | | |
| 7 | End Cap | | |
| 8 | Elbow Corner | | |

| Model | Size | Straight Duct | Wall Cover | Level Bend | Connector | Flexible Duct | Upright Bend | End Cap | Elbow Corner | Applicable air conditioner |
|------------|-------------|------------------|---------------|---------------|-----------|------------------|-----------------|---------|-----------------|----------------------------------|
| HL75*65mm | 8 piece set | 1M * 2 | 1 | 1 | 2 | 1 | 1 | 1 | 1 | 1P-3P |
| HL100*65mm | 5 piece set | 1M * 3 | 1 | 1 | 2 | 1 | | | | 3P-6P |
| HL130*90mm | 5 piece set | 1M * 3 | 1 | 1 | 2 | 1 | | | | 6P-15P |

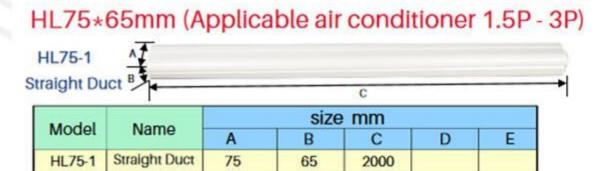


| HL75-3 | | Level Bend (size: mm) | | | | | | |
|--------|--------------------|-----------------------|--------|--------|-----|--|--|--|
| C A | Α | В | С | D | Е | | | |
| | 80 | 70 | 128 | | | | | |
| HL75-5 | | Con | nector | (size: | mm) | | | |
| c | Α | В | С | D | Е | | | |
| B | 82 | 70 | 62 | | | | | |
| HL75-7 | End Cap (size: mm) | | | | | | | |
| C A E | Α | В | С | D | Е | | | |
| J | 60 | 42 | 80 | 70 | 96 | | | |

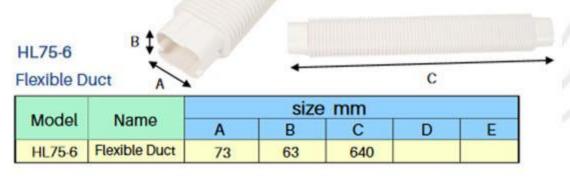


| HL75-2 | | Wal | l Cove | r (size: | mm) | | |
|-------------------|-------------------------|-------|--------|----------|-----|--|--|
| CAAB | Α | В | С | D | Е | | |
| | 82 | 70 | 180 | | | | |
| HL75-4 C A T B | | Uprig | ht Ben | d (size: | mm) | | |
| | Α | В | С | D | Е | | |
| <u>†</u> | 80 | 72 | 102 | | | | |
| HL75-8 A | Elbow Corner (size: mm) | | | | | | |
| D | Α | В | С | D | Е | | |
| | 80 | 70 | 110 | 142 | 82 | | |



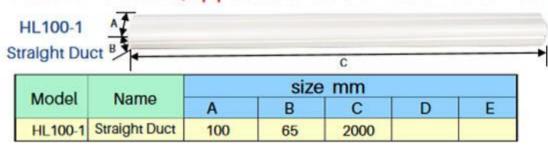


| HL100-3 | | Leve | l Bend | (size: | mm) | |
|---------|-------------------|------|--------|--------|-----|--|
| c | Α | В | С | D | Е | |
| B | 109 | 72 | 142 | | | |
| HL100-5 | | Con | nector | (size: | mm) | |
| c | Α | В | С | D | Е | |
| B A | 110 | 70 | 65 | | | |
| HL100-7 | T-type (size: mm) | | | | | |
| ₹B | Α | В | С | D | Е | |
| /A | 109 | 72 | 180 | 140 | | |

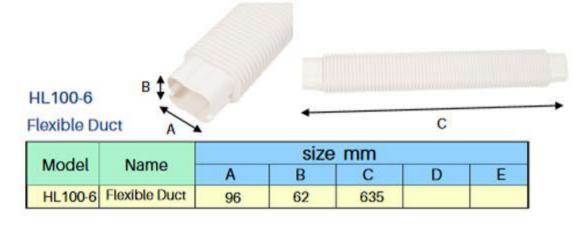


| HL100-2 | Wall Cover (size: mm) | | | | | |
|------------------|-----------------------|------------|-------------|---------------------|-----|--|
| | Α | В | С | D | Е | |
| CANAB | 107 | 70 | 220 | | | |
| | | | | | | |
| HL100-4 ↑ ↑ ↑ | | Uprig | ht Ben | d (size: | mm) | |
| HL100-4 | A | Uprig B | ht Ben C | d _{(size:} | mm) | |

HL130*90mm (Applicable air conditioner 6P - 15P)

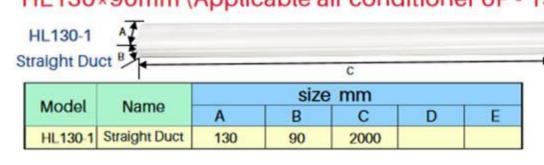

| HL130-3 | Level Bend (size: mm) | | | | | | |
|---------|-----------------------|-----|--------|--------|-----|--|--|
| c | Α | В | С | D | Е | | |
| B | 140 | 98 | 170 | | | | |
| HL130-5 | | Con | nector | (size: | mm) | | |
| c | Α | В | С | D | Е | | |
| B | 140 | 98 | 80 | | | | |
| HL130-7 | T-type (size: mm) | | | | | | |
| B A | Α | В | С | D | Е | | |
| | 138 | 98 | 207 | 170 | | | |

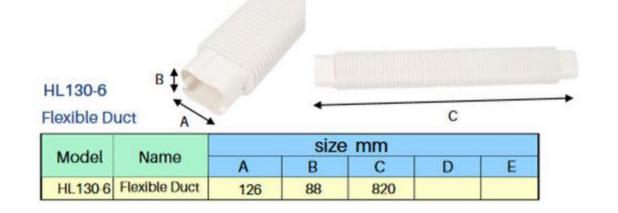

| HL130-2 | Wall Cover (size: mm) | | | | | |
|----------------------|-----------------------|-------|--------|----------|-----|--|
| CANAB | Α | В | С | D | Е | |
| | 140 | 98 | 235 | | | |
| HL130-4 ↑ | | Uprig | ht Ben | d (size: | mm) | |
| $\frac{1}{\sqrt{L}}$ | Α | В | С | D | Е | |
| | | | | | | |



DABUND PIPE

Model: Air Conditioner Bracket

Material: Hot rolled plate(can customize)

Color: White or(customize)


Surface Treatment: polyster powder coating

Loading weight: 100-250kg

Serial number: TB-122, TB-103, TB-113, TB-101, TB-107

Function: Weather resistant, Perfect for long-term outdoor use. Fits most of mini split ductless air conditioner heat pump systems.



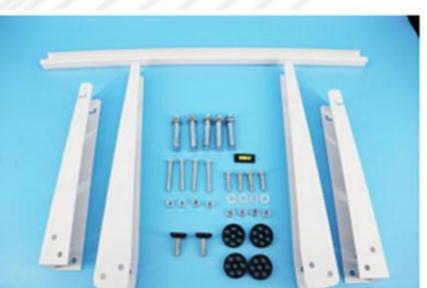





Item Name: TB-122

Material: Hot rolled plate(can customize)

Thickness:(can customize)
Color: White or(customize)

Surface Treatment: polyster powder

coating

Loading weight: 100-250kg

| Model No. | Size(mm) | Thickness(mm) | N.W(kg) | Loading | FOB SHANGHAI |
|-----------|-------------|---------------|---------|---------|----------------|
| TB-122A | 780*350*450 | 1.8mm | 3.4 | 200kg | Please Consult |
| TB-122B | 800*400*500 | 1.8mm | 4.0 | 250kg | |









Item Name: TB-103

Material: Hot rolled plate(can customize)

Thickness:(can customize)
Color: White or(customize)

Surface Treatment: polyster powder coating

Loading weight: 100-250kg

| Model No. | Size (mm) | Thickness (mm) | N.W(kg) | Loading | FOB Shanghai | | | |
|---|-----------|-------------------|---------|---------|--------------|--|--|--|
| TB-103A | 365*450 | 1.8 | 2.00 | 150kG | Please | | | |
| TB-103B | 450*500 | 1.8 | 2.40 | 200KG | Consult | | | |
| TB-103C | 500*550 | 1.8 | 3.20 | 250KG | | | | |
| It can be customized to your size thickness | | | | | | | | |









Item Name: TB-113


Material: Hot rolled plate(can customize)

Thickness:(can customize)
Color: White or(customize)

Surface Treatment: polyster powder coating

Loading weight: 100-250kg

| Model No. | Size (mm) | Thickness (mm) | N.W(kg) | Loading | FOB Shanghai |
|------------------|-------------------------|-------------------|---------|---------|-------------------|
| TB-113A | 365*450 | 1.8 | 2.00 | 150kG | Please Consult |
| TB-113B | 450*500 | 1.8 | 2.40 | 200KG | |
| TB-113C | 500*550 | 1.8 | 3.25 | 250KG | |
| It can be custom | nized to your size thic | kness | | | |

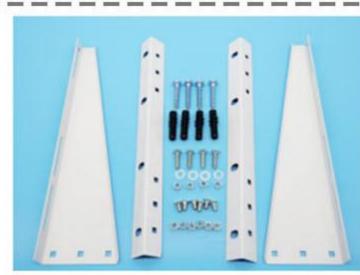







Item Name: TB-101

Material: Hot rolled plate(can customize)

Thickness:(can customize)
Color: White or(customize)


Surface Treatment: polyster powder coating


Loading weight: 100-250kg

| Model No. | Size (mm) | Thickness (mm) | N.W(kg) | Loading | FOB Shanghai | | |
|---|-----------|-------------------|---------|---------|--------------|--|--|
| TB-101A | 460*460 | 1.8 | 2.1 | 150kG | Please | | |
| TB-101B | 500*550 | 1.8 | 3.2 | 200KG | Consult | | |
| TB-101C | 600*600 | 1.8 | 3.6 | 250KG | | | |
| It can be customized to your size thickness | | | | | | | |





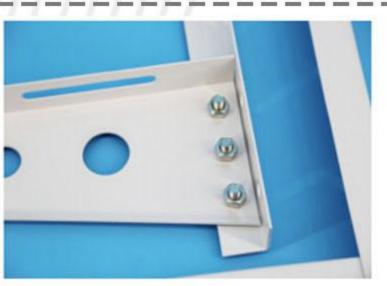



Item Name: TB-107

Material: Hot rolled plate(can customize)

Thickness:(can customize)
Color: White or(customize)

Surface Treatment: polyster powder coating

Loading weight: 100-250kg


| Model No. | Size (mm) | Thickness (mm) | N.W(kg) | Loading | FOB Shanghai | | |
|---|-----------|-------------------|---------|---------|--------------|--|--|
| TB-107A | 500*500 | 1.8 | 2.70 | 150kG | Please | | |
| TB-107B | 500*550 | 1.8 | 3.10 | 200KG | Consult | | |
| TB-107C | 600*600 | 1.8 | 3.60 | 250KG | | | |
| It can be customized to your size thickness | | | | | | | |

Model: Rubber Air Conditioner Pad Material: Rubber

DABUND PIPE

Function: Protect refrigerant pipes, prevent refrigerant leakage, good decorative effect, environmental protection and energy saving.



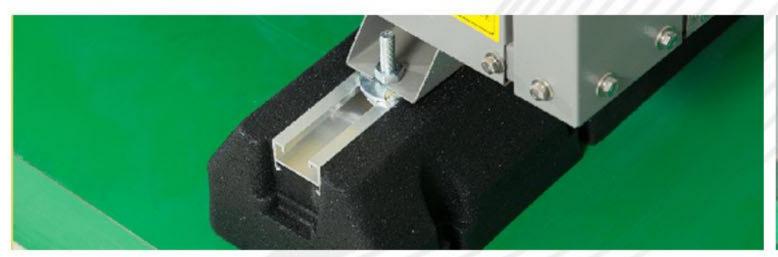



* Other Rubber Air Conditioner Pad



Model: Plastic Air Conditioner Base Material: PVC

Function: Two rubber dampers on the bracket can reduce noise effectively.

The universal PVC support bracket can load up to 150kg.







Model: Conditioner Pad Remote Control

Function: By using AC remote control, you can remotely control most brands and models of air conditioners.









Model: Mini Split Cleaning Kit

Function: The air-conditioning hang-up wind turbine air duct cleaning water hood solves the problem that the wind wheel is difficult to clean and the sewage is difficult to handle.











Model: Condensate Pumps

Function: Air Conditioning Water Pump
Drainage Pump professional design for HVAC,
Air Con, Dehumidifier, Furnace, Ice Maker,
other equipment where an automatic drain
pump is required.



















Liquid Tight Fittings

AC Capacitor

Valve Core Removal









Copper Fittings


Self-Drilling Anchor

AC Drain Hose

AC Drain Pipe





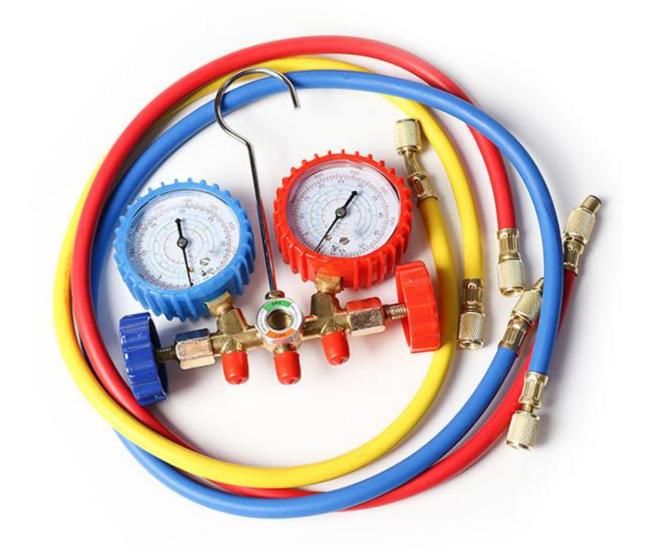



Refrigerant Charging Valve

AC Disconnect Box

Refrigerant Gauge Set

Zip Tie Tool







AC Thermostat

Pcb Board

Liquid Line Filter Driers



Flaring Tool Kit

Sight Glass





Washing Machine Hose

Washing Machine Hose



OUR SALES TEAM

Changzhou DABUND Pipe Co., Ltd. is a professional manufacturer of HVAC parts in China, with more than 14 years' experience. The main products we produce including Insulated Copper Pipe, Air Conditioner Line Set, Air Conditioner Installation Pipe Kit, Air Conditioner Bracket, AC Lineset Cover, Air Conditioning Cleaning Kit etc. We produce Embossed White PE insulation and aluminum pipes by ourself, to save cost for customers. Dabund Pipe is located in Changzhou City, Jiangsu Pro. near to Shanghai. With scientific progressive conception of rapid introduction, we make our air conditioning insulated pipe cover many overseas markets. Like North American, Europe, Southeast Asia, Middle East, South Africa and so on. "Growing with clients" is always our management concept.

Quality first priority, we believe that the market is a true test of the vitality of enterprises. We welcome customers and friends from around the world to cooperate with us and look forward to receiving your inquiries in the near future. Our sales team is always ready to serve you. Enjoy Dabund Enjoy Life.

Our sales team is always ready to serve you.

Free sample

24h Service



