

Product data sheet

Specifications



Flat screen, Harmony GTU, 10.4 Touch Smart Display SVGA, coated display

HMIDT542FC

Main

| | |
|---------------------------|---------------------------|
| Range of product | Harmony GTU |
| Product or component type | Flat screen |
| Terminal type | Touchscreen display |
| [Us] rated supply voltage | 12...24 V DC power supply |
| Supply voltage limits | 10.8...28.8 V |
| Power consumption in W | 15 W |
| Inrush current | 30 A |

Complementary

| | |
|----------------------------|----------------------------------|
| Integrated connection type | USB 2.0 type A |
| Touchscreen resolution | 1024 x 1024 |
| Pixel resolution | 800 x 600 |
| Display size | 10.4 inch |
| Aspect ratio | 4:3 |
| Display type | Colour TFT LCD |
| Display resolution | 800 x 600 pixels SVGA |
| Display colour | 16 million colours |
| Backlight lifespan | 50000 hours |
| Touch panel | Multi touch analogue resistive |
| Provided equipment | 1 flash card |
| Function available | Brightness sensor |
| Type of cooling | Natural convection |
| Type of installation | Indoor installation |
| Cut-out dimensions | 259 (+ 1/- 0) x 201 (+ 1/- 0) mm |
| Width | 272.5 mm |
| Height | 214.5 mm |
| Depth | 67 mm |
| Net weight | 2.7 kg |

Environment

| | |
|---------------------------------------|--|
| IP degree of protection | Front panel: IP66 |
| NEMA degree of protection | NEMA 4X front panel |
| Standards | UL 508 |
| Product certifications | CE UKCA UKEX |
| Ambient air temperature for operation | 0...60 °C conforming to EN 61131-2 |
| Ambient air temperature for storage | -20...60 °C |
| Relative humidity | 10...90 % non-condensing |
| Operating altitude | 2000 m |
| Vibration resistance | 3.5 mm constant amplitude (f = 5...9 Hz) conforming to EN/IEC 61131-2 |
| Shock resistance | 147 m/s ² conforming to EN/IEC 61131-2 |
| Electromagnetic compatibility | Electrostatic discharge immunity test level 3 conforming to EN/IEC 61000-4-2 |

Packing Units


| | |
|------------------------------|----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 19.0 cm |
| Package 1 Width | 33.0 cm |
| Package 1 Length | 37.5 cm |
| Package 1 Weight | 4.0 kg |
| Unit Type of Package 2 | CAR |
| Number of Units in Package 2 | 2 |
| Package 2 Height | 43.0 cm |
| Package 2 Width | 35.5 cm |
| Package 2 Length | 45.5 cm |
| Package 2 Weight | 8.289 kg |

Offer Sustainability

| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS declaration |
| RoHS exemption information | Yes |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |


External Dimensions

Display Unit with Box Module

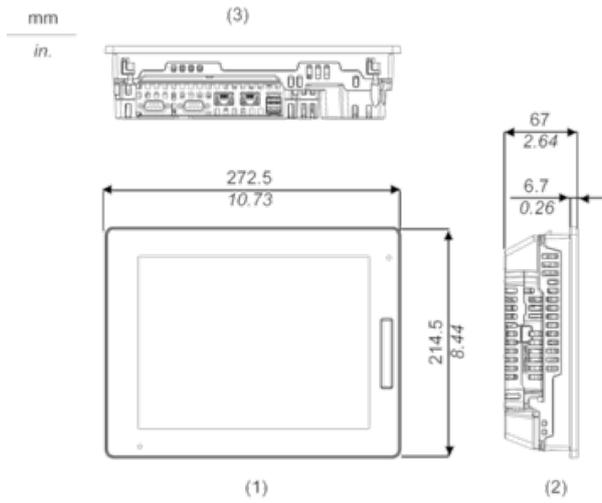

- 1 Front
- 2 Left
- 3 Bottom

Installation with Installation Fasteners and Dimensions with Cables

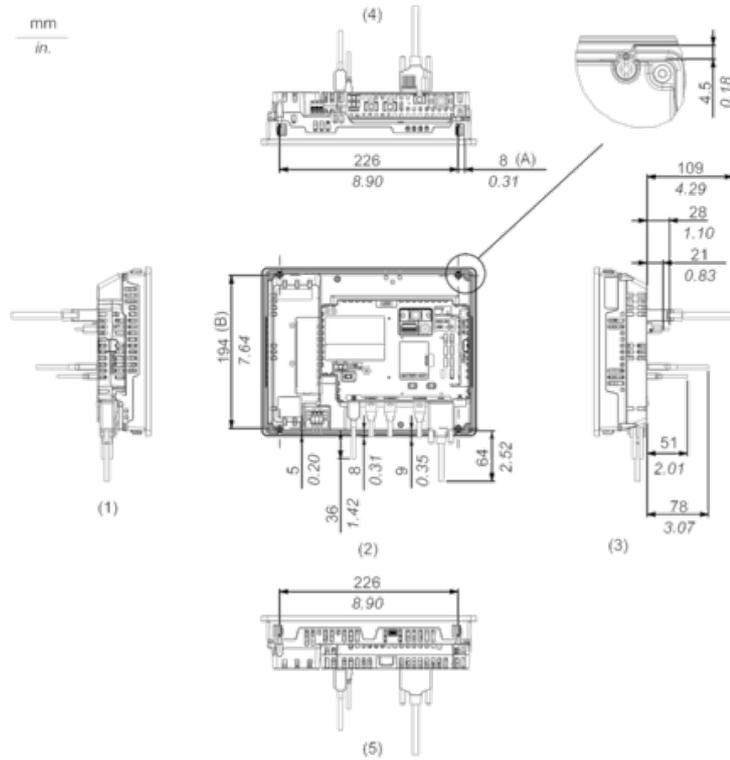


- (A) Rotation area of the fastener
- (B) Pitch of the center of installation fastner screws

- 1 Right
- 2 Front
- 3 Left
- 4 Bottom
- 5 Top

Mounting

Panel Cut Dimensions

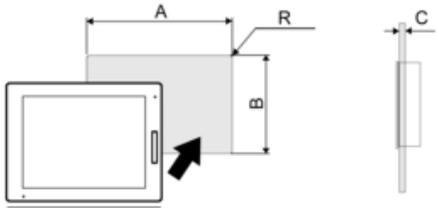

Dimensions in mm


| A | B | C | R |
|-------------|-------------|---------|--------|
| 259 (+1/-0) | 201 (+1/-0) | 1.6...5 | 3 max. |

Dimensions in in.

| A | B | C | R |
|-----------------|-----------------|------------|-----------|
| 10.2 (+0.04/-0) | 7.91 (+0.04/-0) | 0.06...0.2 | 0.12 max. |


Installation Requirements

Mounting Angle

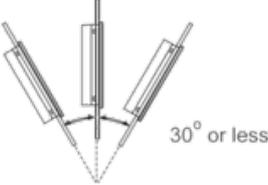

When installing this product in a slanted position with an incline more than 30°, the ambient temperature must not exceed 40 °C (104 °F). You may need to use forced air cooling (fan, A/C) to ensure the ambient operating temperature is 40 °C or less (104 °F or less).

Clearance

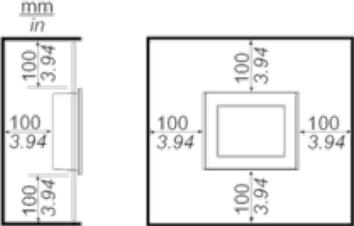

Recommended replacement(s)