

弹簧管/带

Spiral Tube (Single/Muti-row)

产品特性/Product Features:

- 精选高回弹性聚氨酯制造，多次使用，尺寸形变仍在较小范围。
- 先进的螺旋制造工艺，制造过程中，气管壁厚、硬度、耐压力性能不会降低。
- 通过SGS、ROHS指令检测认证。
- Select high resilience polyurethane, multiple used and in the range of smaller size deformation
- Advanced screw manufacturing process, in manufacturing process, the wall thickness hardness, resistance to gas pressure will not reduce the performance
- Approve SGS, ROHS directive certification testing.



产品用途/Product Use:


- 气动工具、装配厂气压工具、带压输送管道。
- 更适合狭小的使用环境。
- 牵引拖车气制动系统的连接管路。
- 其压力损耗小, 制动反应快, 具有很好的弹性, 耐磨损
使用寿命长。

- Pneumatic tools, assembly pneumatic tools, with pressure pipelines.
- More suitable for the use of small environment.
- Tractor trailer air brake system connection line.
- Small pressure loss, quick brake response, good elasticity, long service Life wear resistance.

弹簧管Y-CPU/双排弹簧管Y-TRCPU/双层阻燃弹簧管Y-CASU

产品编码 Code		管子尺寸 Size		长度 Length(m)	端长 F(mm) End Length	螺旋内径 D(mm) Coil O.D
系列 Series	型号 Model	外径 O. D(mm)	内径 I. D(mm)			
Y-CPU Y-TRCPU Y-CASU	0425	4	2.5	1~30	100	16/20/25
	0640	6	4	1~30	100	25/32/40
	0850	8	5	1~30	100	32/40/50
	1065	10	6.5	1~30	100	40/50/60
	1280	12	8	1~30	100	60/76/90

* A,B,C的尺寸均可以按客户要求定制。 The size of A,B,C can be custom - made.

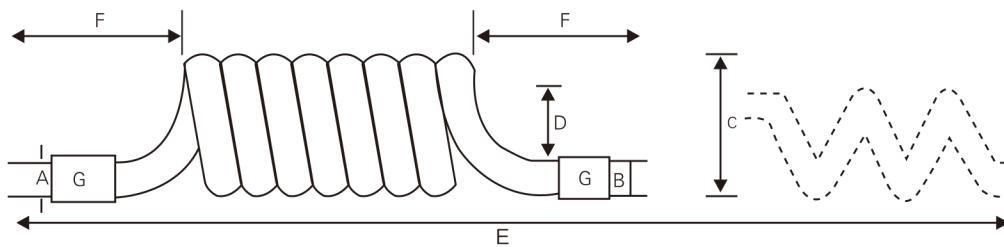

A 管外径: Tubing O.D
B 管内径: Tubing I.D
C 螺旋外径: Coil O.D
D 螺旋内径: Coil I.D
E 最大长度: Max.Length
F 端长: End Length
G 弹簧管芯数: Tube Number (1or2or3)

我公司生产的各种材质的软管，均可加工成弹簧管，因此弹簧管的性能取决于各种气管自身的性能，诸如工作压力，工作温度等。

建议:弹簧管的工作长度 $\leqslant 1/2E$ 。

最大工作长度不能超过 $2/3E$ 否则伸缩管的回复性被破坏，使弹簧管不能自如收缩。

All kinds of tube that we produced can be processed into spiral tube, the performance is up to the tube itself, such as the working pressure, working temperature, etc.

Suggestion: spring tube working length $1/2E$.

Maximum working length not more than $2/3E$, or the resilience will be destroyed, can't shrink freely.

