



Thailand Distributor :

Energy Power Save CO.,LTD.
 442/2 Chan Road, Thung Watdon Sathon
 Bangkok Thailand 10120 www.7-mars.com
 Office Tel : +66 (02) 114 7145-9
 Email : info@7-mars.com

COMPANY PROFILE

Shenzhen Tuodatong Electronics Co., Ltd. is a high-tech enterprise integrating R&D, production, and sales of lithium BMS.

Our product covers intelligent software BMS, hardware BMS and active balancer from 1S~32S and 1A~300A. It is widely applicable to EV, energy storage, solar inverters, and other fields. Awarded 20+ patents and passed ISO9001, 3C, FCC, CE and ROHS to meet your various needs.

Your needs are our motivation. 10+ engineers with 15+ team industry experience will help you choose and design the BMS that suits you most.

For the existing sample, 1 day delivery. 2 years guarantee.



Products


- ◆ Smart BMS
- ◆ Hardware BMS
- ◆ Active balancer

Characteristics

- ◆ CAN
- ◆ RS485
- ◆ RS232
- ◆ On / off switch
- ◆ LCD screen
- ◆ SOC monitoring
- ◆ Bluetooth

TDT-8625

- ✓ Small and light
- ✓ Temperature sensor
- ✓ With balance

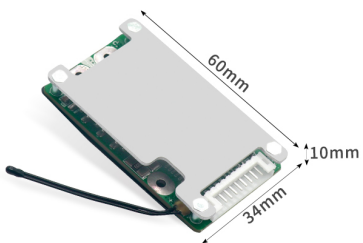

Scope: 7S, 8S, 10S(5A~20A) NW: 0.03kg

TDT-6004


- ✓ Parameters adjustable (engineer)
- ✓ 2 temperature sensors
- ✓ With balance



Scope: 5S~16S(20A~45A) NW: 0.08kg

TDT-8986


- ✓ Parameters adjustable (engineer)
- ✓ With balance
- ✓ Temperature sensor

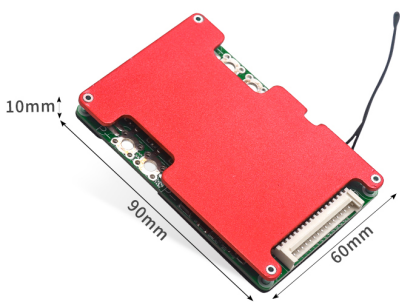

Scope: 6S~16S(30A~40A) NW: 0.115kg

TDT-6003A


- ✓ Parameters adjustable (engineer)
- ✓ 2 temperature sensors
- ✓ On / off switch
- ✓ With balance

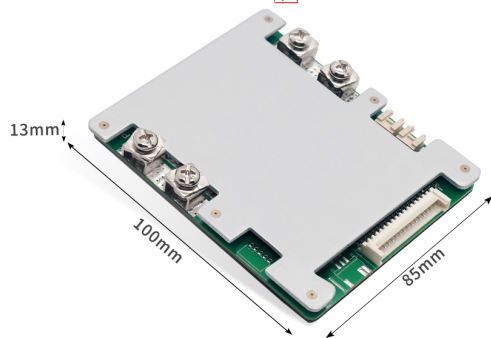

Scope: 5S~16S(60A~80A) NW: 0.136kg

TDT-8489B


- ✓ Small in size
- ✓ 2 temperature sensors
- ✓ With balance

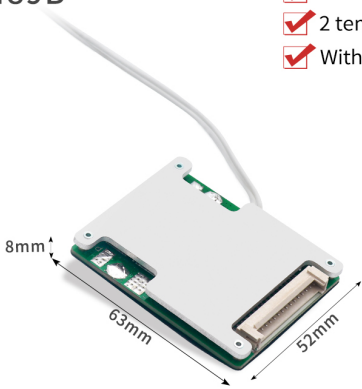

Scope: 4S~16S(20A~40A) NW: 0.077kg

TDT-6007A


- ✓ Parameters adjustable (engineer)
- ✓ 2 temperature sensors
- ✓ On / off switch
- ✓ With balance

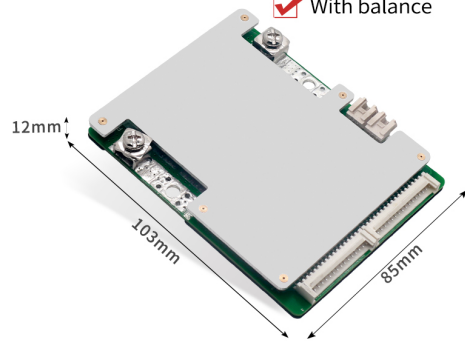

Scope: 5S~32S(30A~50A) NW: 0.172kg

TDT-8359


- ✓ Small in size
- ✓ Temperature sensor

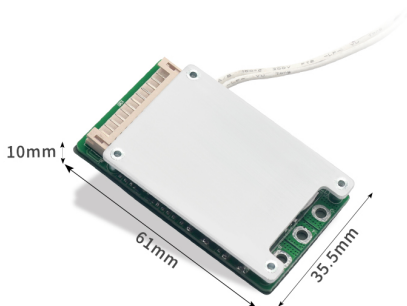

Scope: 3S~13S(5A~20A) NW: 0.026kg

TDT-8975


- ✓ Parameters adjustable (engineer)
- ✓ With balance
- ✓ Temperature sensor

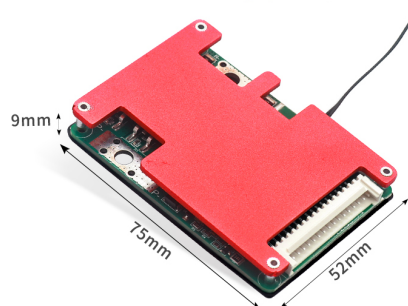

Scope: 6S~16S(10A~25A)

TDT-8283B


- ✓ Parameters adjustable (engineer)
- ✓ With balance
- ✓ 2 Temp sensors

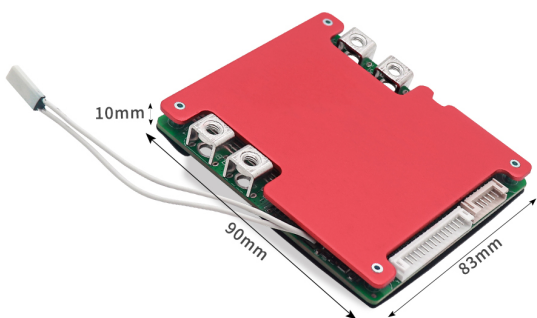

Scope: 11S~24S(20A~40A)

TDT-8023

- ✓ With balance
- ✓ Temperature sensor

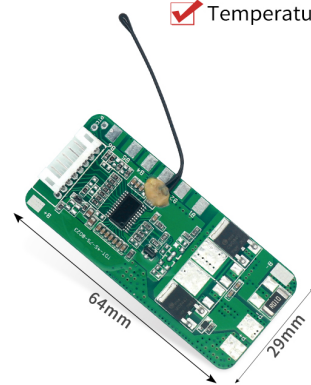


Scope: 4S~7S(5A~10A) NW: 0.0245KG

Application scenarios

E-scooter, balancing car, electric bike, electromobile, mobility scooter, electric tricycle, low speed mobility scooter, golf cart.



TDT-6016

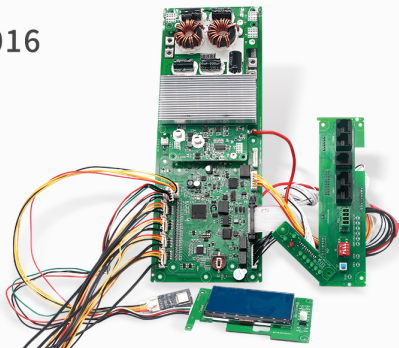

- ✓ 4 temperature sensors
- ✓ On / off switch
- ✓ RS232
- ✓ RS485
- ✓ CAN
- ✓ SOC
- ✓ SOH
- ✓ Display screen
- ✓ Bluetooth

Scope: 8S~18S (50A~150A) NW: 1.5kg

Size: 300*100*48mm

TDT-6022




- ✓ 4 temperature sensors
- ✓ On / off switch
- ✓ RS232
- ✓ RS485
- ✓ Bluetooth
- ✓ SOC
- ✓ SOH
- ✓ CAN
- ✓ Display screen

Scope: 8S~16S (100A~200A) NW: 1.15kg

Size: 300*100*48mm

TDT-6001C

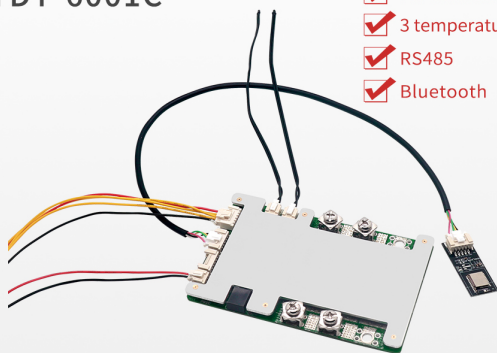


- ✓ Parameters adjustable
- ✓ 3 temperature sensors
- ✓ RS485
- ✓ Bluetooth

Scope: 3S~5S(20A~120A)

Size: 120*77*14mm

TDT-6011B

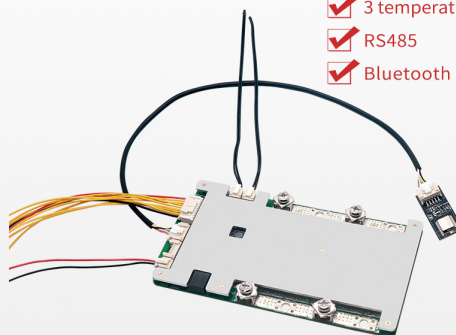

- ✓ Parameters adjustable
- ✓ 3 temperature sensors
- ✓ RS485
- ✓ Bluetooth

Scope: 6S~10S(20A~160A)

Size: 151*85*14mm