

SD 01B04N01-02E



<External Dimensions>

Trigonometry


Unit: mm

General tolerance = \pm (value of tolerance class IT18 based on JIS B 0401-2016) / 2

Power supply plug type

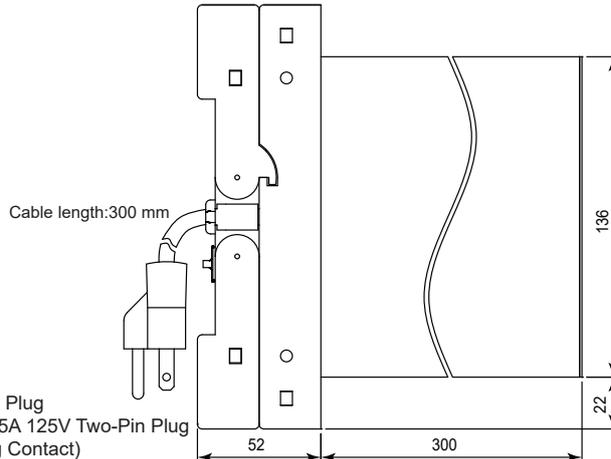
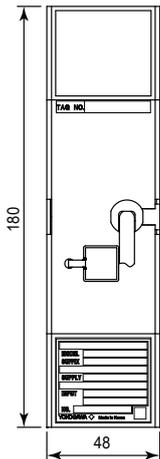


100V Version Plug
(JIS C8303 15A 125V Two-Pin Plug
with Earthing Contact)



220V Version Plug
(CEE Publication 7 Standard Sheet VII 10/16A 250V
Two-Pole Plug with Dual-Earthing Contacts)

Power supply terminal type(option /TB or /A2TB)

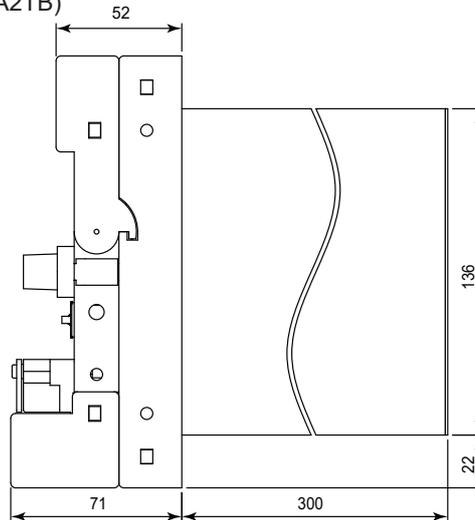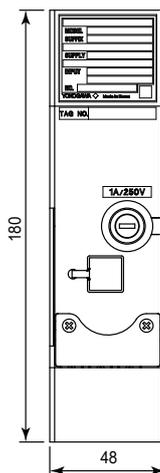



Power supply
terminal block



Power and Ground Terminal connection
(Connection screw: M4)

Symbol	Description
L	+ > Power supply
N	
\perp	Ground

Power supply terminal type(option /REK)

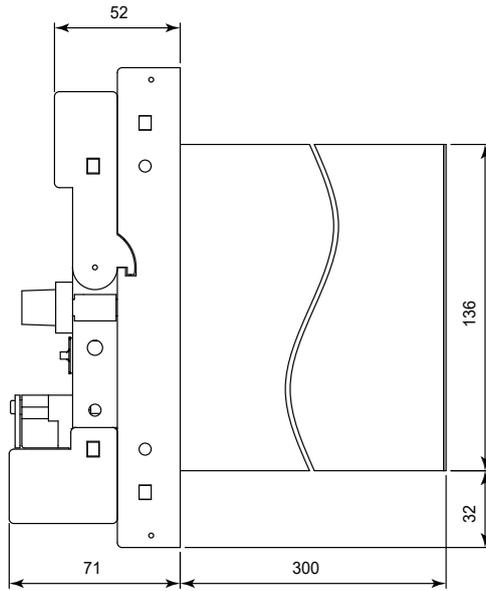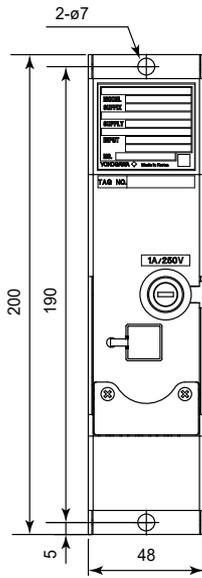

Power supply terminal block



Power and Ground Terminal connection (Connection screw: M4)

Symbol	Description
L	+ > Power supply
N	- > Power supply
⏚	Ground

Weight
SISD Body: 0.7 kg
Rack Case: 1.0 kg

Terminal arrangement



Terminal Connections (Screw: M4)

Terminal Designation	Description
A	+ > Output1 (1 to 5 V DC)
B	- > Output1 (1 to 5 V DC)
C	
D	
F	+ > Output2 (4 to 20 mA DC)
H	- > Output2 (4 to 20 mA DC)
J	
K	

Do not connect to the output terminal when the terminal is not in use.

Terminal Connections (Screw: M4)

Terminal Designation	Description
1	+ > Input (1 to 5 V DC)
2	- > Input (1 to 5 V DC)
3	
4	
5	
6	
7	
8	