



SET2 MNDS 351 701 24DC M12 LP



MNDS 351 701 auf
einem doppelt-
wirkenden Antrieb



MNDS 351 701 und
Flex-Pack FP 701
auf einem einfach-
wirkenden Antrieb

5/2-Wege Magnetventil, monostabil, Schnittstelle nach
NAMUR 1 – 1/4". Durch Hinzunahme des „Flex-Pack“
Typ FP 701 A wird das Ventil zu einem 3/2-Wege
NAMUR-Ventil mit Federraumbelüftung.



Die Ventile sind grundsätzlich mit einer Handhilfsbetätigung
zum Drücken ausgestattet.

Lieferumfang:

Ventil MNDS 351 701 24DC M12 LP

Flex-Pack FP 701 A


Zubehör: 1 pin, 2 Schrauben, 1 Verschlussstopfen, 2 Schalldämpfer

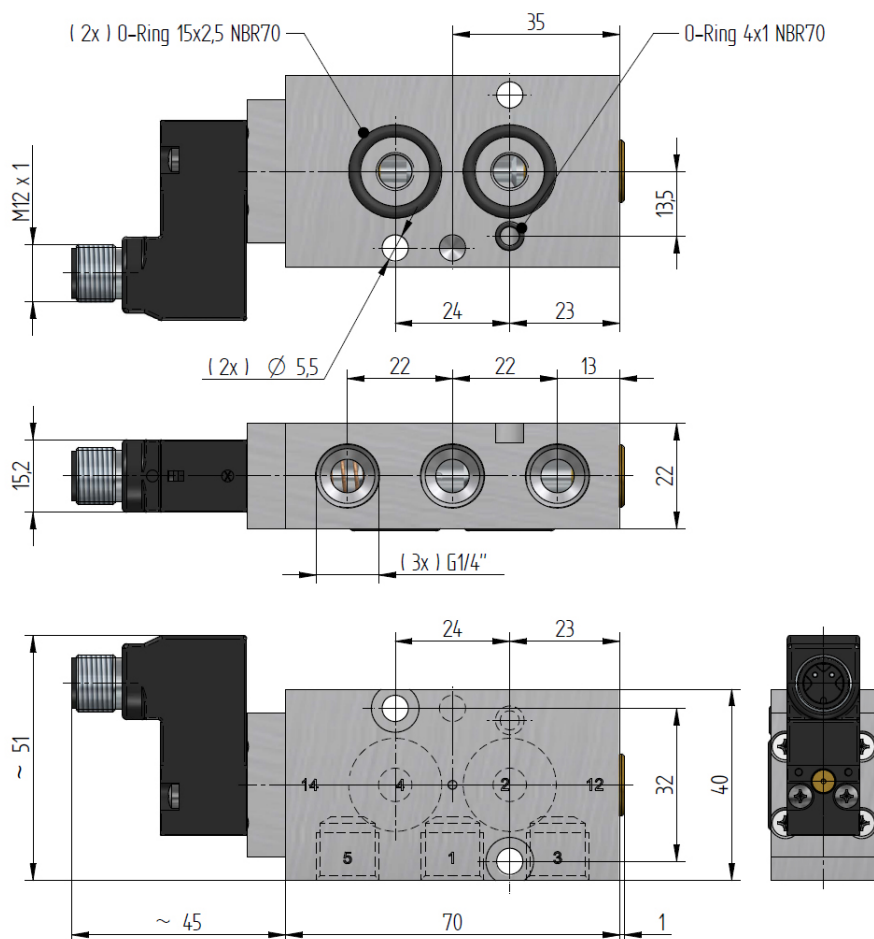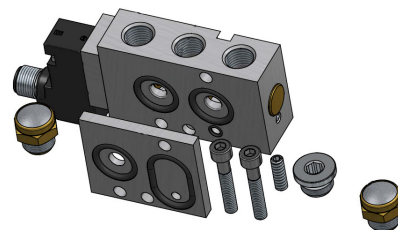


Anschlüsse	Durchfluss	Arbeitsdruck	Gewicht
G 1/4"	1250 l/min	2,5 - 8 bar	0,26 kg

Spannung	Toleranz	I	Leistungsaufnahme	LED	Anschluss
24V=	+/- 10%	42 mA	1,0 W	ohne	M12x1

SET2 MNDS 351 701 24DC M12 LP



MNDS 351 701 on double acting act.



MNDS 351 701 and Flex-Pack FP 701 on single acting act.

5/2-way solenoid valve, actuated by permanent signal.

Interface according to 1/4" NAMUR-standard.

Adding the „**Flex-Pack**“, converts the valve into a 3/2-way NAMUR-valve with exhaust-air recirculation (“purge”).



Valves are generally equipped with manual override to push.

Delivery includes:

Valve MNDS 351 701 24DC M12 LP

Flex-Pack FP 701 A

Accessories: 1 pin, 2 screws, 1 plug, 2 silencers

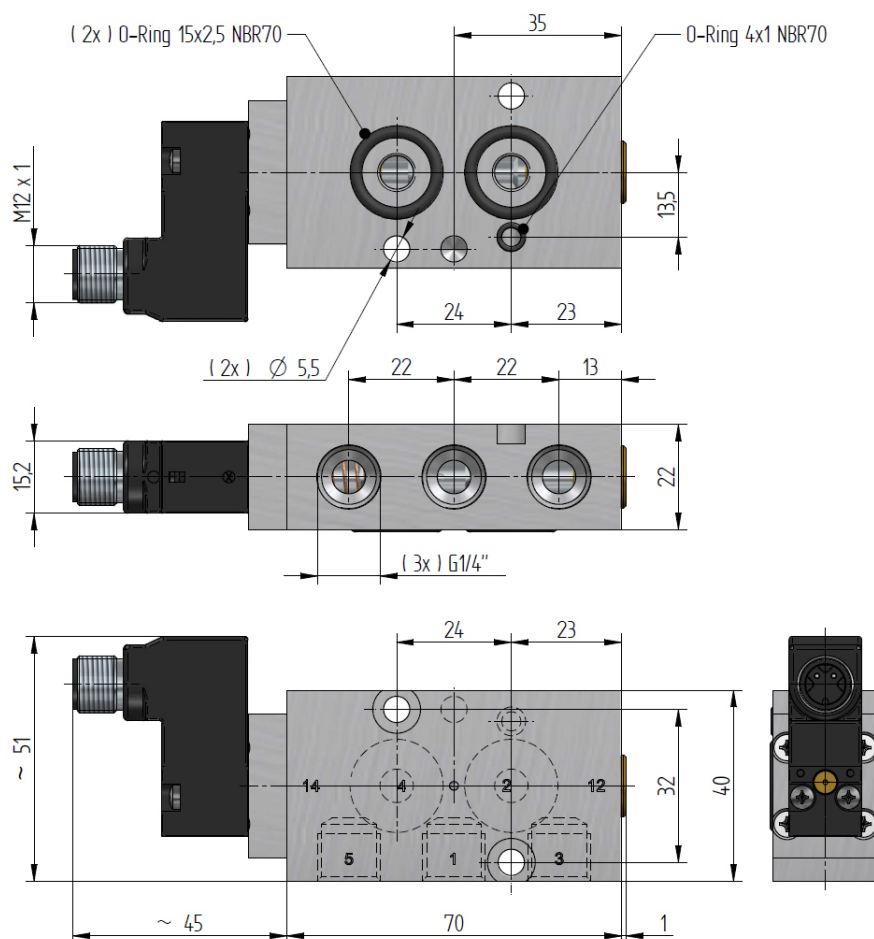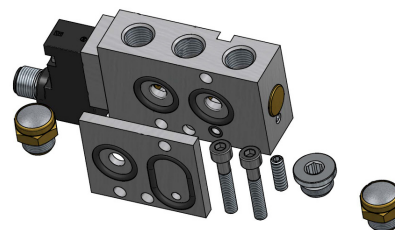

Port size	Air flow	Operating press.	Weight
G 1/4"	1250 l/min	2,5 - 8 bar	0,26 kg

Voltage	Tolerance	Ampere	Power consumption	LED	Connection
24V=	+/- 10%	42 mA	1.0 W	without	M12x1