


SET1 MNDS 510 701 24DC M12 LP







MNDS 510 701

5/2-Wege Magnetventil mit Federrückstellung.
Schnittstelle nach NAMUR 1 – 1/4".

Die Ventile sind grundsätzlich mit einer Handhilfsbetätigung zum Drücken ausgestattet.


- Lieferumfang:
Ventil MNDS 510 701 24DC M12 LP
Zubehör: 1 pin, 2 Schrauben, 2 Drossel-Schalldämpfer,
1 Steckverschraubung 8 mm

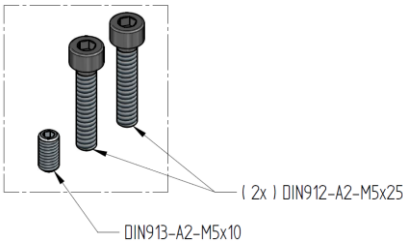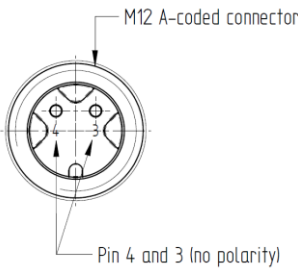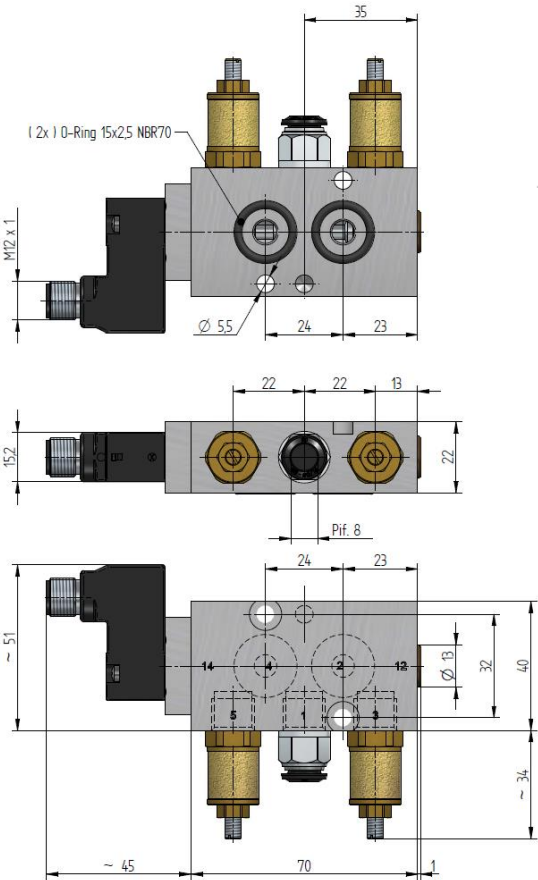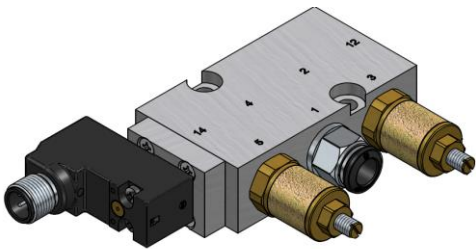

Anschlüsse	Durchfluss	Arbeitsdruck	Gewicht
G 1/4"	1250 l/min	2 - 8 bar	0,25 kg

Voltage	Toleranz	I	Leistungsaufnahme	LED	Anschluss
24V=	+/- 10%	42 mA	1,0 W	ohne	M12x1

SET1 MNDS 510 701 24DC M12 LP

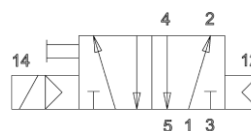

MINDS 510 701





5/2-way solenoid valve with air spring return.
Interface according to 1/4" NAMUR-standard.

Valves are generally equipped with manual override to push.

Delivery includes:

Valve: MNDS 510 701 24DC M12 LP

Accessories: 1 pin, 2 screws, 2 flow control silencers,
1 push-in fitting 8 mm

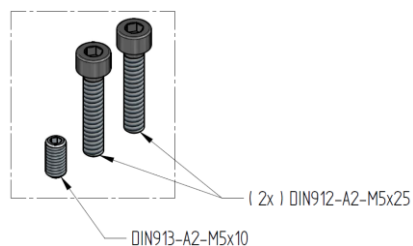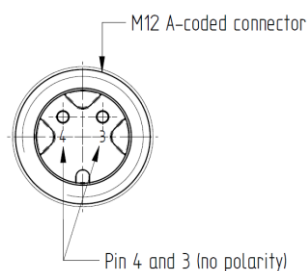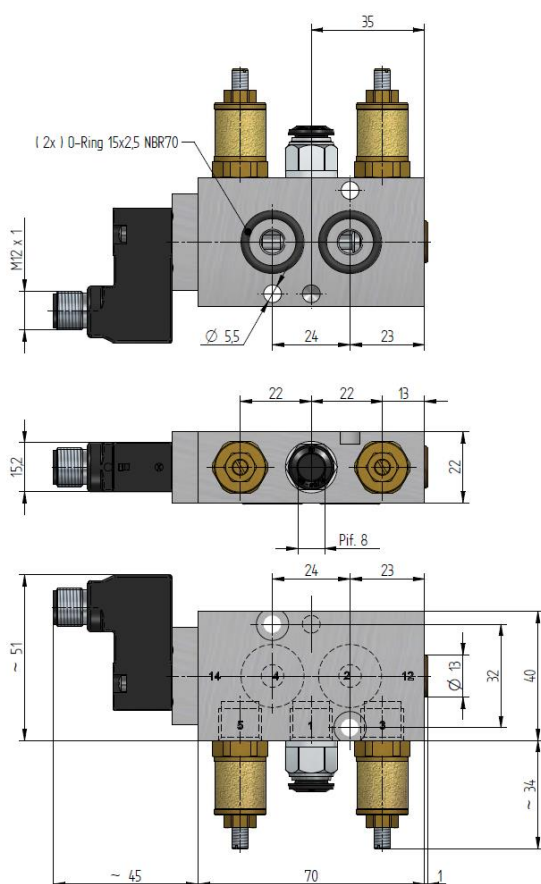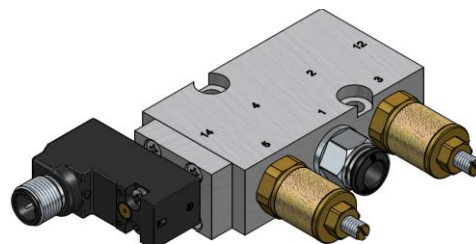

Port size	Air flow	Operating press.	Weight
G 1/4"	1250 l/min	2 - 8 bar	0,25 kg

Voltage	Tolerance	Ampere	Power consumption	LED	Connection
24V=	+/- 10%	42 mA	1.0 W	without	M12x1