

OED/ODM



# Product Catalog

High-end Lighting Solutions for Office and Education

OEM/ODM



Better lighting makes better life

Energy Power Save Co.,Ltd.

Add : 442/2 Chan Road, Thung Watdon, Sathon, Bangkok, Thailand, 10120

Tel : +66 (02) 114- 7145 - 9 Auto. 5 Line

Email : [info@ledartlamp.com](mailto:info@ledartlamp.com), [info@siamenergysaving.com](mailto:info@siamenergysaving.com)

Fax : +66 (02) 673 - 1263

[www.ledartlamp.com](http://www.ledartlamp.com)



# Contents

About Sundopt	03
Viewline Linear Lights	04
Premline Linear Lights	24
Louva Evo Luminaires	40
Prisma Pendant Luminaires	56
Accessories	63




## About Sundopt

The LED technology is bringing new orientation and even redefinition to lighting industry. Since established in 2008, Sundopt has been adhering to the new technical trend and vision of “better lighting make better life”.

We are dedicated to providing high-end lighting solutions to office, education and commercial applications. Rooted in the mission of “making better lighting”, our products combine the state-of-art optic solution with modern aesthetic design concept. The main products range are as follows:


Linear lights,  
Recessed and surface-mounted luminaires,  
Pendant and free-standing luminaires  
Downlights and Track lights

Together with Energy Power Save CO.,LTD, we believe we will establish a win-win relationship and create a better light enviromental experience for offices, retails, education, healthcare and retail premises.

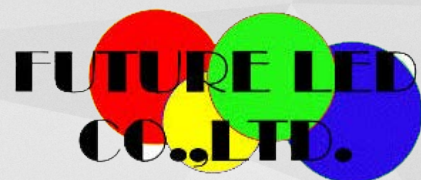

## Viewline Pro

Glare-free linear lights with louvre

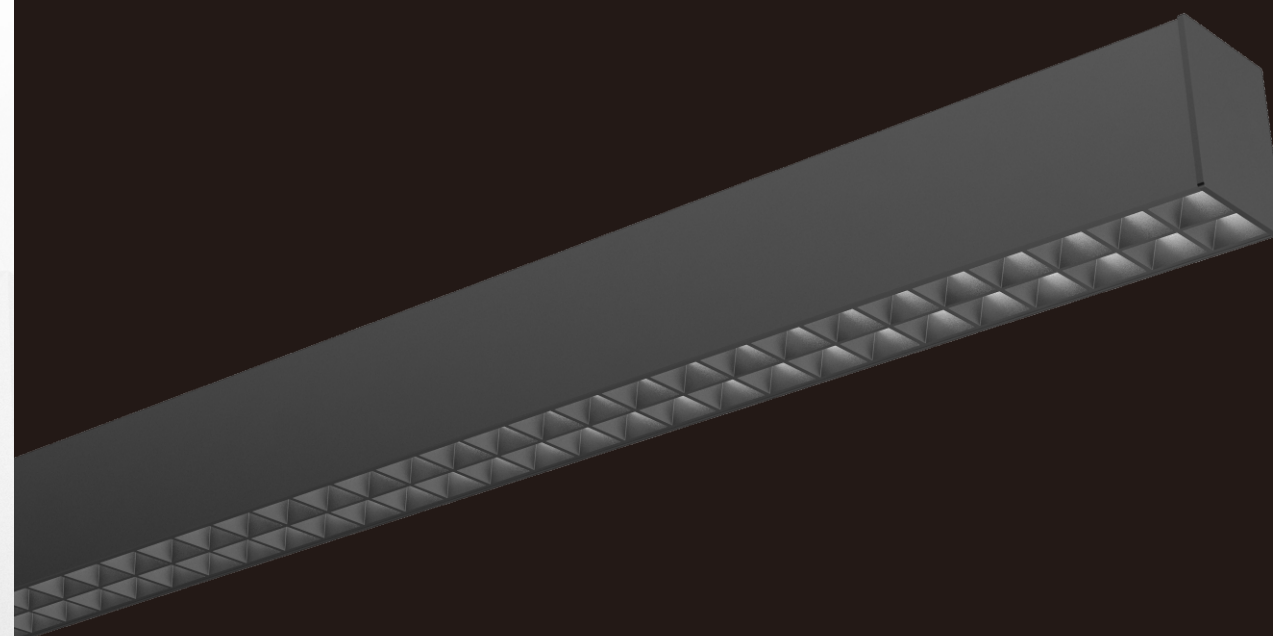




Human centric lighting

- ♡ Enhance people’s well-being
- ⌚ Improve productivity
- ⌚ Comply with human biorhythm




Darklight optic




Indirect/direct light

## Optimum glare control Uniform light

Thanks to its highly specular Darklight optic, Viewline provides superior lighting quality without reflected glare and ensure light source invisible to create comfortable sense. With special lens, Viewline offers optimum glare control, compatible with EN12464:  $L65 < 1500 \text{cd/m}^2$  and  $UGR < 13$  for workstations. The indirect lights enhance the uniformity and visual comfort due to the reflection of ceiling.



Indirect/direct light



Asymmetric

## Slim type

Two beam patterns for different applications



Up to **115** lm/W


## Perfectly blend into modern office

With straight-line element of design, Viewline could enhance spatial axes and express maximum linearity to blend perfectly into architectural space.

## Viewline Free-standing Luminaires

Flexible, convenient and easy to operate



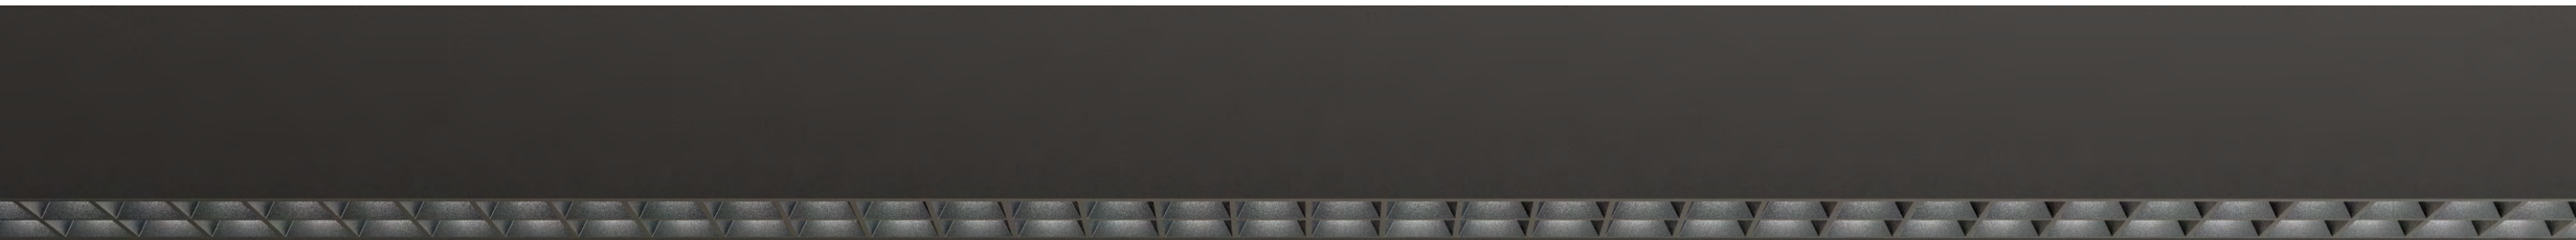

### Versatile configuration for various workspace

The standalone type suits for individual workstation in the same length as the luminaire. Alternatively, the continuous-row type is ideal to be mounted in open plan office for teamwork with flexible arrangement of workstation.


Individual type




Continuous-row type



Viewline Pro Linear Lights Details

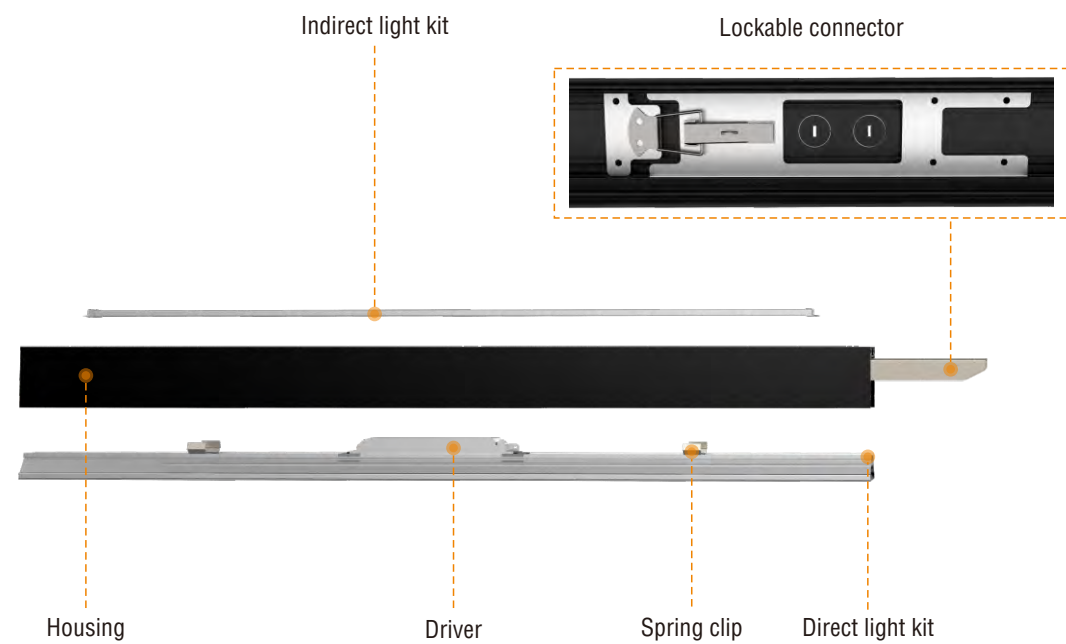

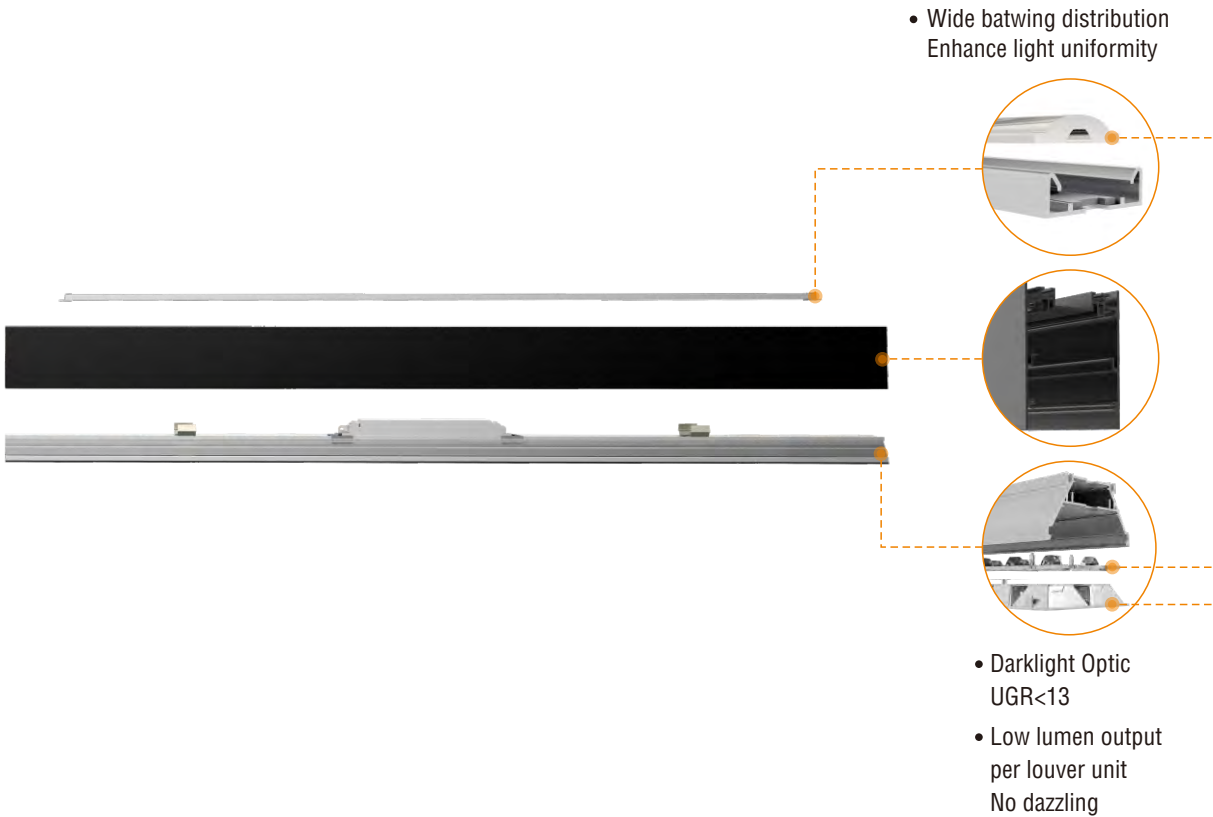

































Modular design.Fast installation.Simple replacement.





Viewline Pro Order Option


Mounting	Control	Dimensions	Configuration	Optics	CCT	Lumen	Color & Finish
 Recessed	 ON/OFF	 1200mm	 Individual	 Direct light	 3000K	1200mm  2400lm(Direct light)	 Black (RAL9005)
 Pendant	 DALI	 1500mm	 Continuous start		 4000K	 3200lm(Direct light)	
 Surface-mounted	 Push Dimming	 3000mm	 Continuous middle	 Indirect/direct light	 3000K-6500K	1600lm ↑ +2400lm ↓ (Indirect/direct light)	
	 Tunable White		 Continuous end			1500mm  3000lm(Direct light)	
	 CASAMBI			 Asymmetric		 4000lm(Direct light)	
 Free-standing	 HCL human centric lighting					 2000lm ↑ +3000lm ↓ (Indirect/direct light)	
	 Sensor					3000mm  6000lm(Direct light)	
	 Emergency					 8000lm(Direct light)	
						 4000lm ↑ +6000lm ↓ (Indirect/direct light)	

Viewline slim linear lights direct



- Features
- Up to 115lm/W.
  - Optimal glare control, UGR<16, L65<1500cd/m².
  - Seamless connection and no light leakage.
  - Can be flexibly connected to myriad of shape.
  - No flickering, visual comfort.

- Application
- Office, education, communication area.

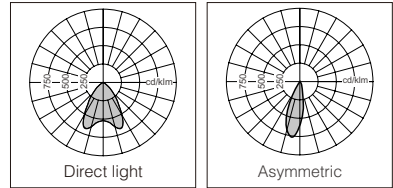

Specifications


General

- Size 1200mm, 1500mm, 3000mm
- Color Matt Black(RAL9005)
- Material Housing: Aluminium  
Lens: PMMA  
Louver: PC  
End cap: Aluminium

Electrical

- Efficacy 115lm/W
- Wattage 23W, 29W@1200mm, 28W, 36W@1500mm  
55W, 72W@3000mm
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

Dimensions




Viewline slim linear lights indirect/direct



- Features
- Up to 115lm/W.
  - Optimal glare control, UGR<13, L65<1500cd/m².
  - Seamless connection and no light leakage.
  - Can be flexibly connected to myriad of shape.
  - No flickering, visual comfort.

- Application
- Office, education, communication area.

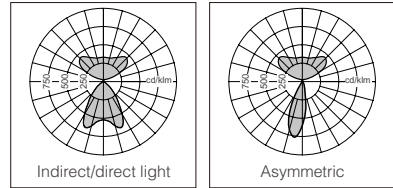

Specifications


General

- Size 1200mm, 1500mm, 3000mm
- Color Matt Black(RAL9005)
- Material Housing: Aluminium  
Lens: PMMA  
Louver: PC  
End cap: Aluminium

Electrical

- Efficacy 115lm/W
- Wattage 36W@1200mm, 45W@1500mm  
90W@3000mm
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%


Dimensions



Viewline Pro linear lightsdirect



- Features
- Up to 115lm/W.
  - Optimal glare control, UGR<16 , L65<1500cd/m².
  - Seamless connection and no light leakage.
  - Individual type and continuous row optional.
  - Can be flexibly connected to myriad of shape.
  - No flickering, visual comfort.
- Application
- Office, education, communication area.



Specifications

General

- Size 1200mm,1500mm,3000mm
- Color Matt Black(RAL9005)
- Material Housing: Aluminium  
Lens: PMMA  
Louver: PC  
End cap: Aluminium

Electrical

- Efficacy 115lm/W
- Wattage 23W,29W@1200mm,28W,36W@1500mm  
55W,72W@3000mm
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

Dimensions



Optical

- Lumen 2400lm, 3200lm@1200mm,  
3000lm, 4000lm@1500mm  
6000lm, 8000lm@3000mm
- CCT 3000K, 4000K, 3000K-6500K tunable
- CRI >80Ra, >90Ra
- UGR C0<16,C90<16 (X=4H,Y=8H)
- SDCM ≤3

Durability



- Lifespan 50000H(L80, Tc=55°C)
- Warranty 5 years
- Operating -35~45°C
- IP Protection IP20
- IK Protection IK02



Viewline Pro linear lights indirect/direct



- Features
- Up to 115lm/W.
  - Optimal glare control, UGR<13, L65<1500cd/m².
  - Seamless connection and no light leakage.
  - Individual type and continuous row optional.
  - Can be flexibly connected to myriad of shape.
  - No flickering, visual comfort.
- Application
- Office, education, communication area.



Specifications


General

- Size 1200mm,1500mm,3000mm
- Color Matt Black(RAL9005)
- Material Housing: Aluminium  
Lens: PMMA  
Louver: PC  
End cap: Aluminium

Electrical

- Efficacy 115lm/W
- Wattage 36W@1200mm,45W@1500mm  
90W@3000mm
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

Dimensions




Optical

- Lumen 4000lm(1600lm ↑ +2400lm ↓ )@1200mm,  
5000lm(2000lm ↑ +3000lm ↓ )@1500mm  
10000lm(4000lm ↑ +6000lm ↓ )@3000mm
- CCT 3000K, 4000K, 3000K-6500K tunable
- CRI >80Ra, >90Ra
- UGR C0<13,C90<13 (X=4H,Y=8H)
- SDCM ≤3

Durability


- Lifespan 50000H(L80, Tc=55°C)
- Warranty 5 years
- Operating -35~45°C
- IP Protection IP20
- IK Protection IK02

Viewline free-standing luminaire

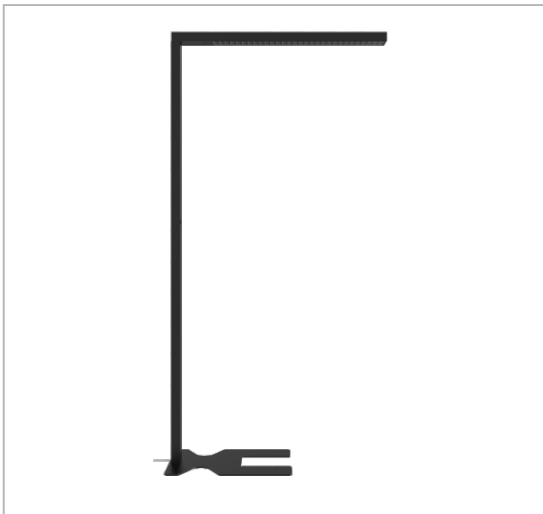

- Features
- UGR<13, glare-free and uniform light.
  - Elegant and modular design.
  - Easy installation and operation.
  - Up to 115lm/W.
  - No flickering, visual comfort.

- Application
- Office workspace.



Specifications


General

- Size 1118x46x2000mm
- Color Matt White(RAL9016), matt black(RAL9005)
- Material Housing: Aluminium  
Lens: PMMA  
Louver reflector: PC

Electrical

- Efficacy 115lm/W
- Wattage 81W
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

Dimensions

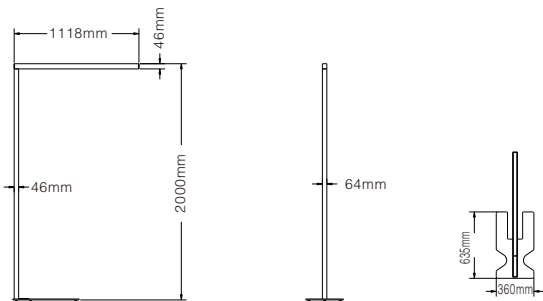


Viewline Desk-standing Luminaire



- Features
- UGR<13, glare-free and uniform light.
  - Elegant and modular design.
  - Easy installation and operation.
  - Up to 115lm/W.
  - No flickering, visual comfort.

- Application
- Office workspace.



Specifications


General

- Size 1118x46x1340mm
- Color Matt White(RAL9016), matt black(RAL9005)
- Material Housing: Aluminium  
Lens: PMMA  
Louver reflector: PC

Electrical

- Efficacy 115lm/W
- Wattage 81W
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

Dimensions

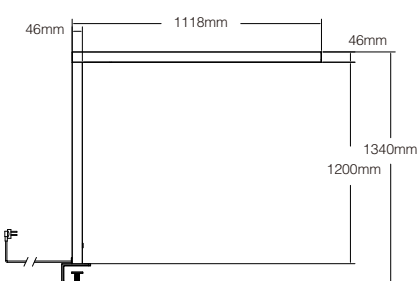


Optical

- Lumen 9000lm ( 6000lm ↑ +3000lm ↓ )
- CCT 3000K, 4000K, 3000K-6500K tunable
- CRI >80Ra, >90Ra
- UGR <13
- SDCM ≤3

Durability


- Lifespan 50000H(L80, Tc=55°C)
- Warranty 5 years
- Operating -35~45°C
- IP Protection IP20
- IK Protection IK02

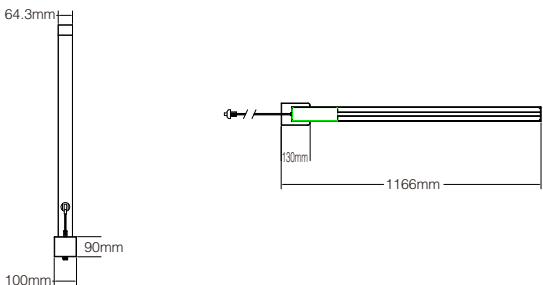



# Premline

Elegant. Efficient. Convenient.

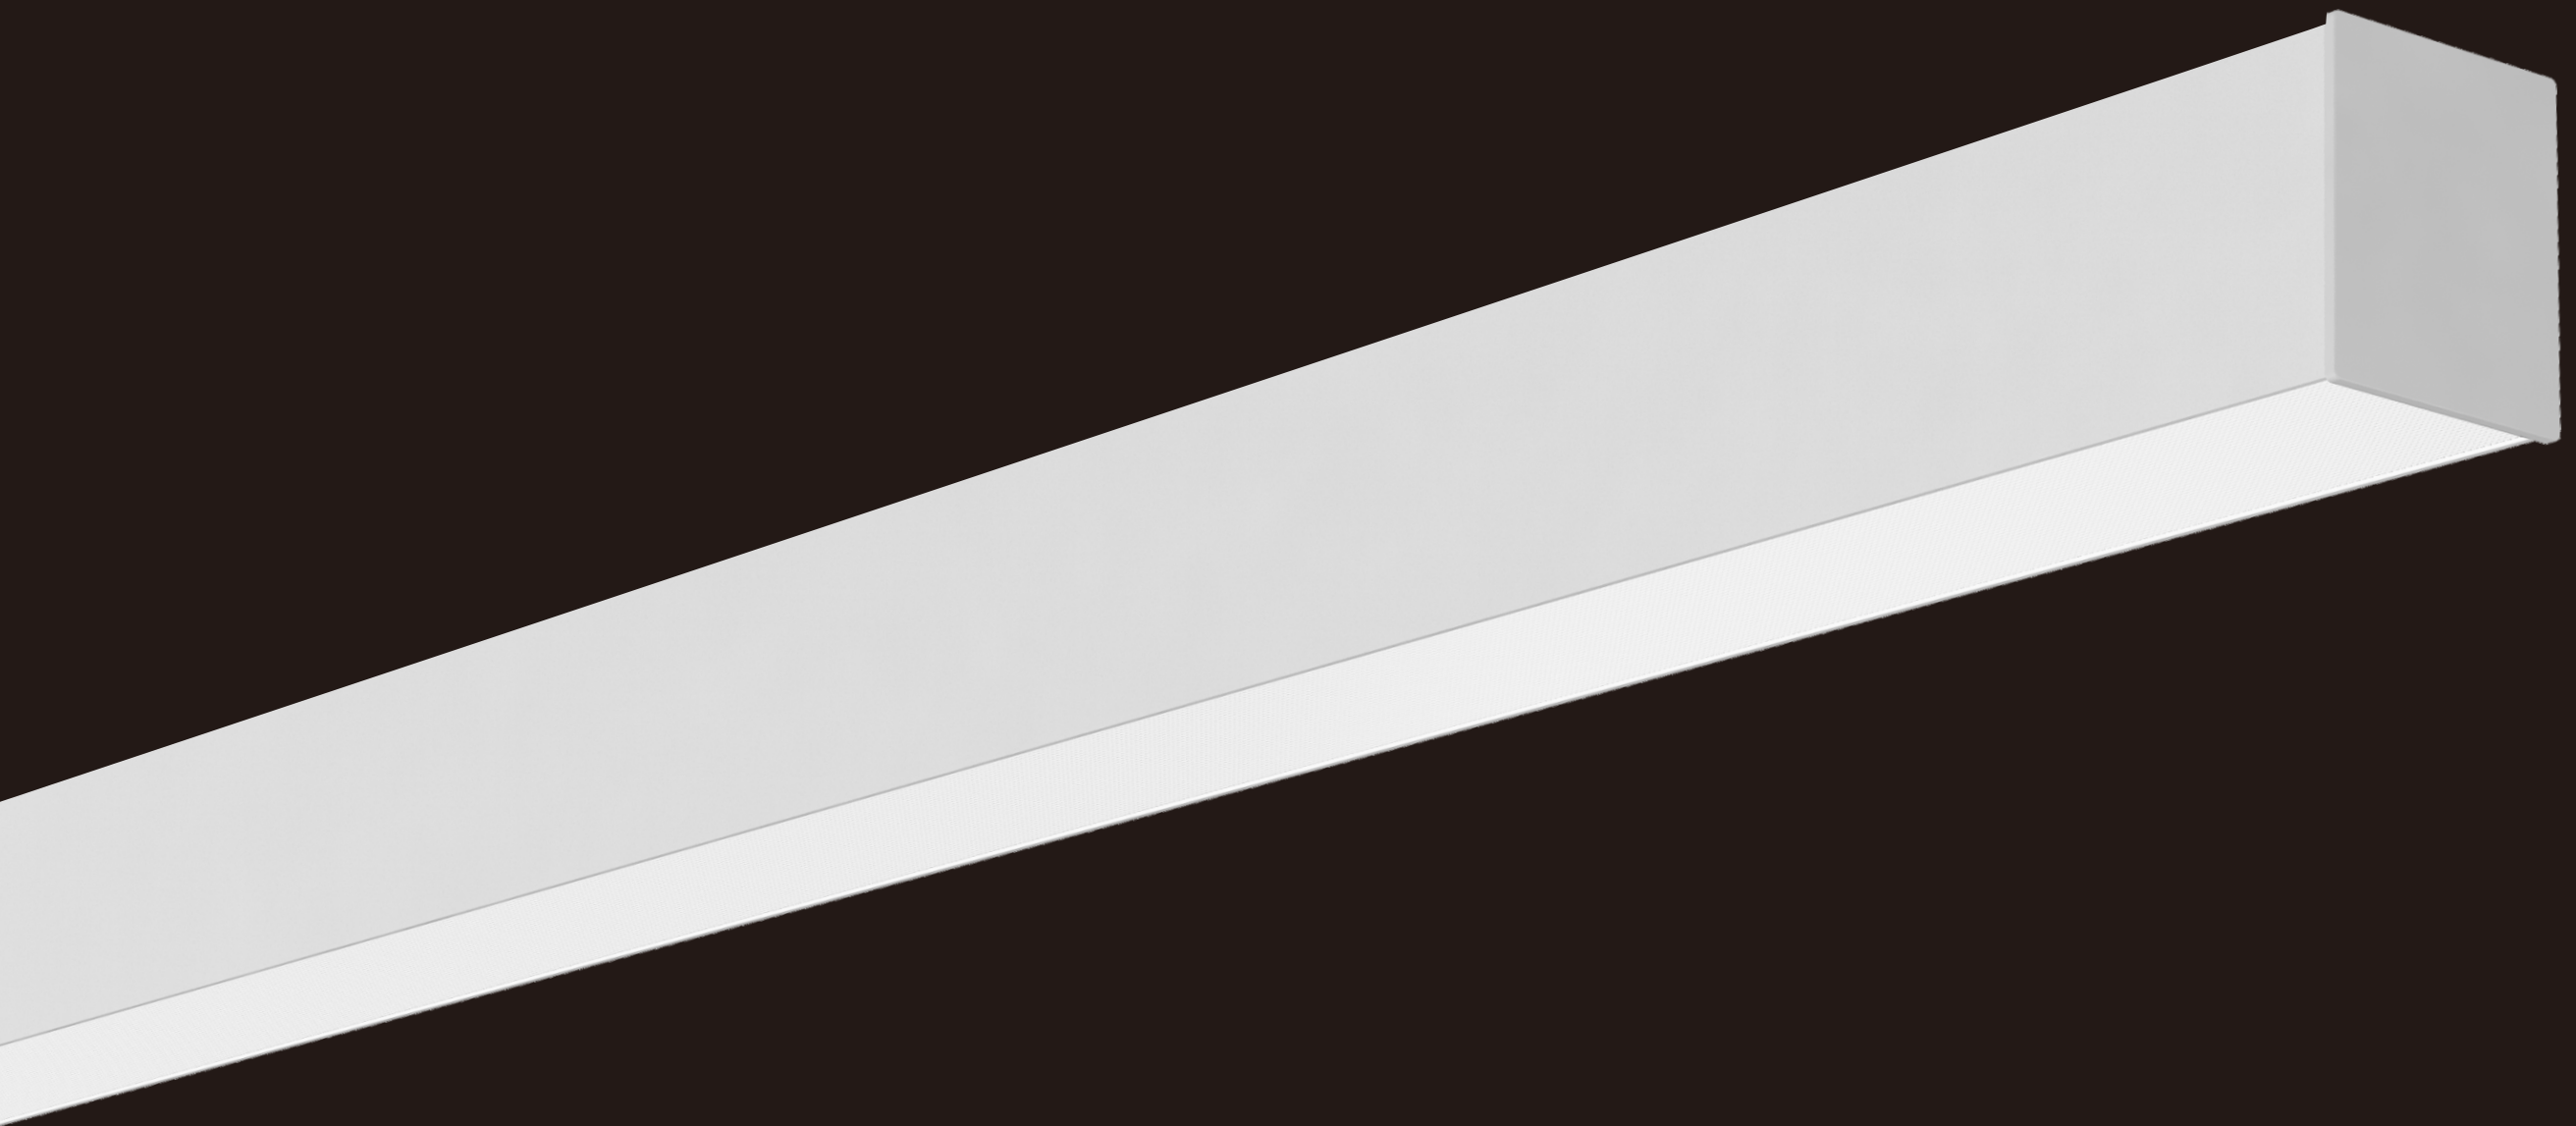






## Premline design concept

Architects need an elegant lighting with outstanding performance, helping them in design side to enhance the spatial experience. Investors want luminaires in higher efficiency and durability. Easy installation and replacement are installers' concerns. Employees expect the environment to increase well-being and improve productivity. Premline could meet all sets of requirements and act as an ideal lighting solution for office and education areas.


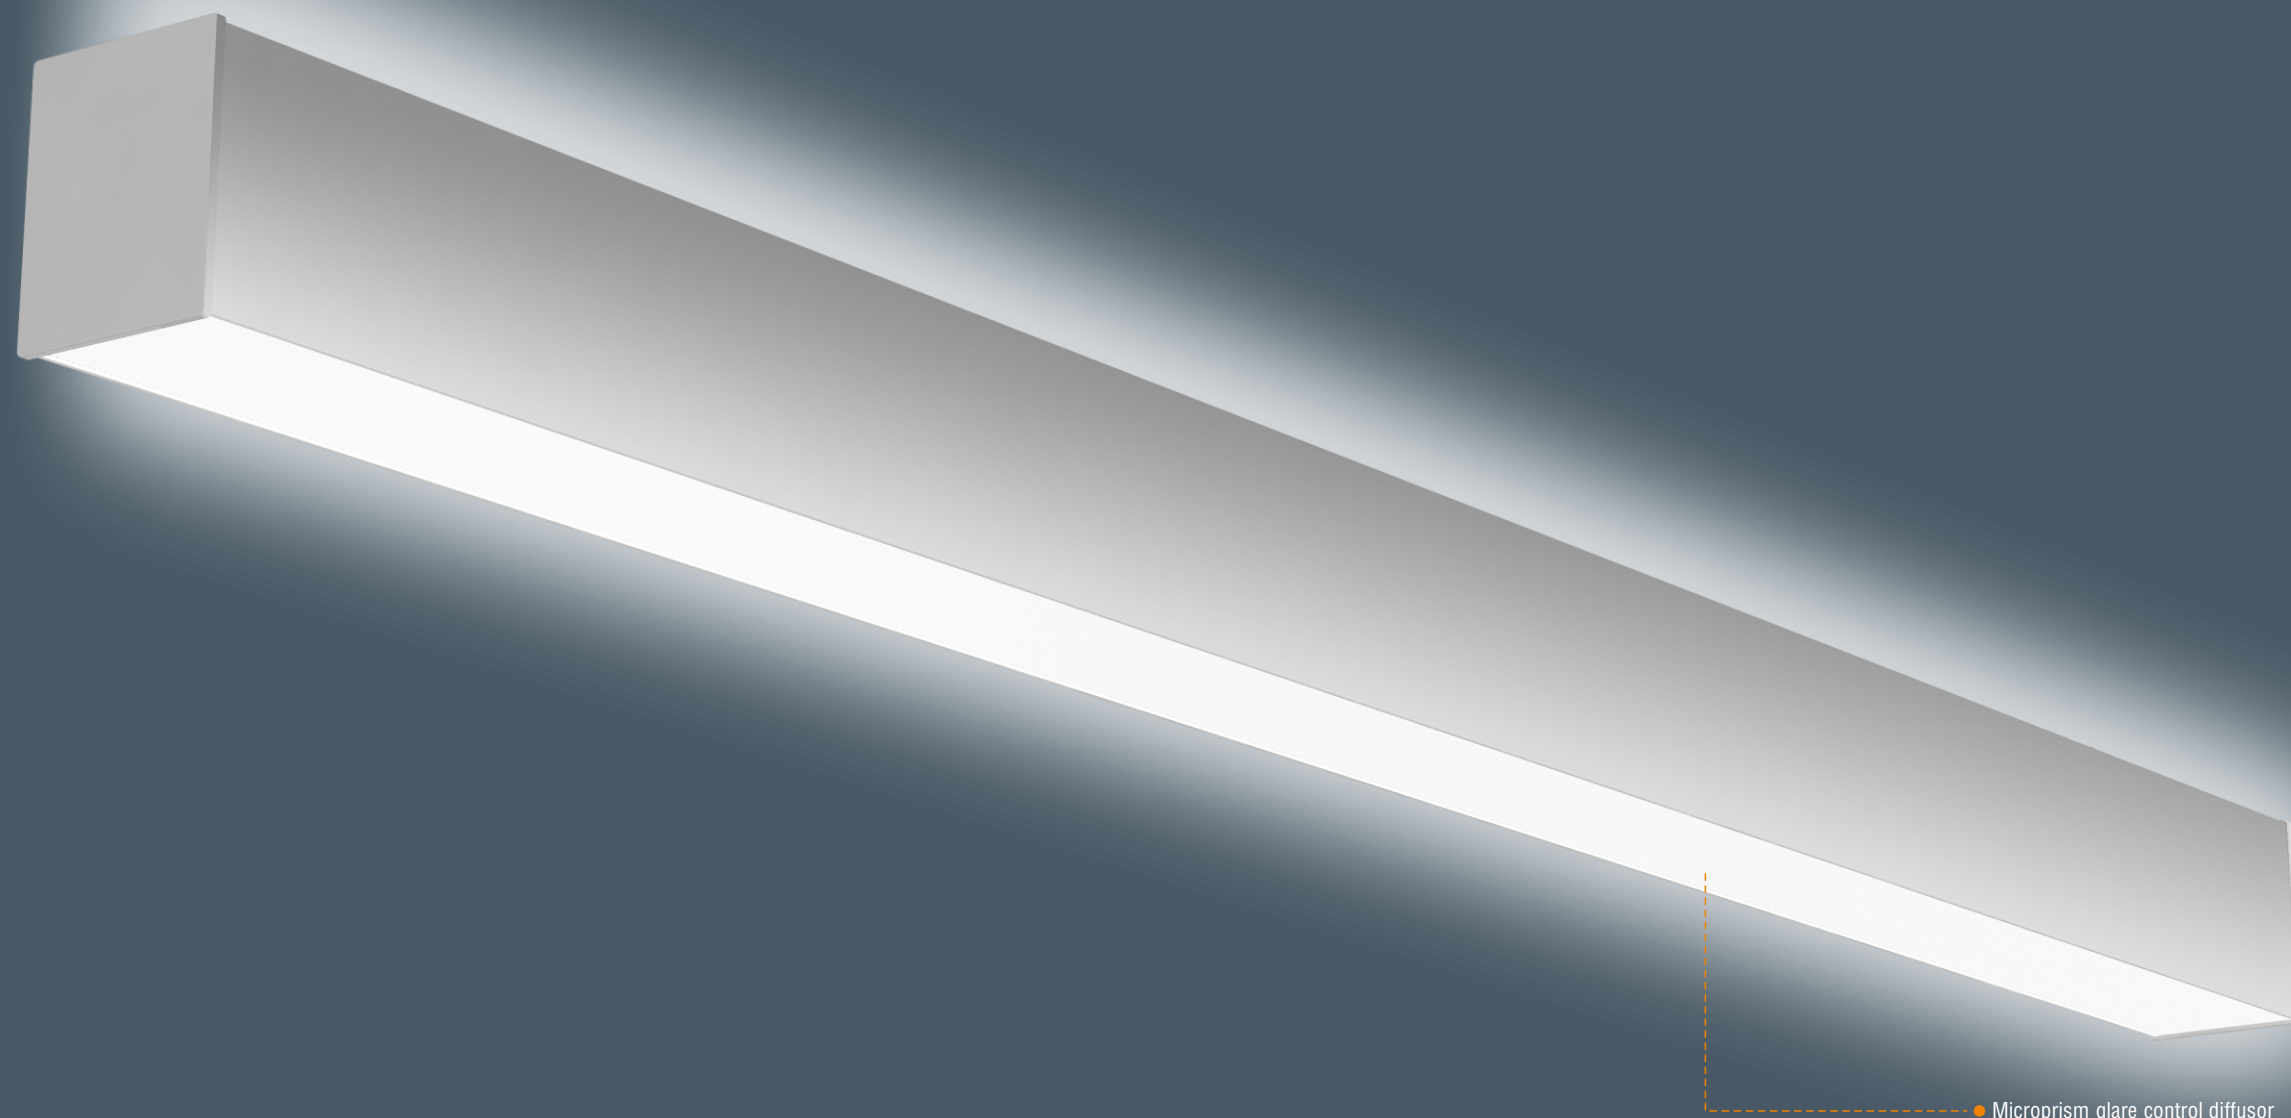


## Uniform indirect/direct light



Premline Linear is available in direct type and Indirect-direct type. The direct lights serve the workstations while indirect lights could enhance the uniformity of the whole task area, helping to create balanced luminous environment through reflection from the ceiling.

## Visual comfort

Thanks to innovative optical technology, Premline could produce glare-free lights with micoprism diffuser.

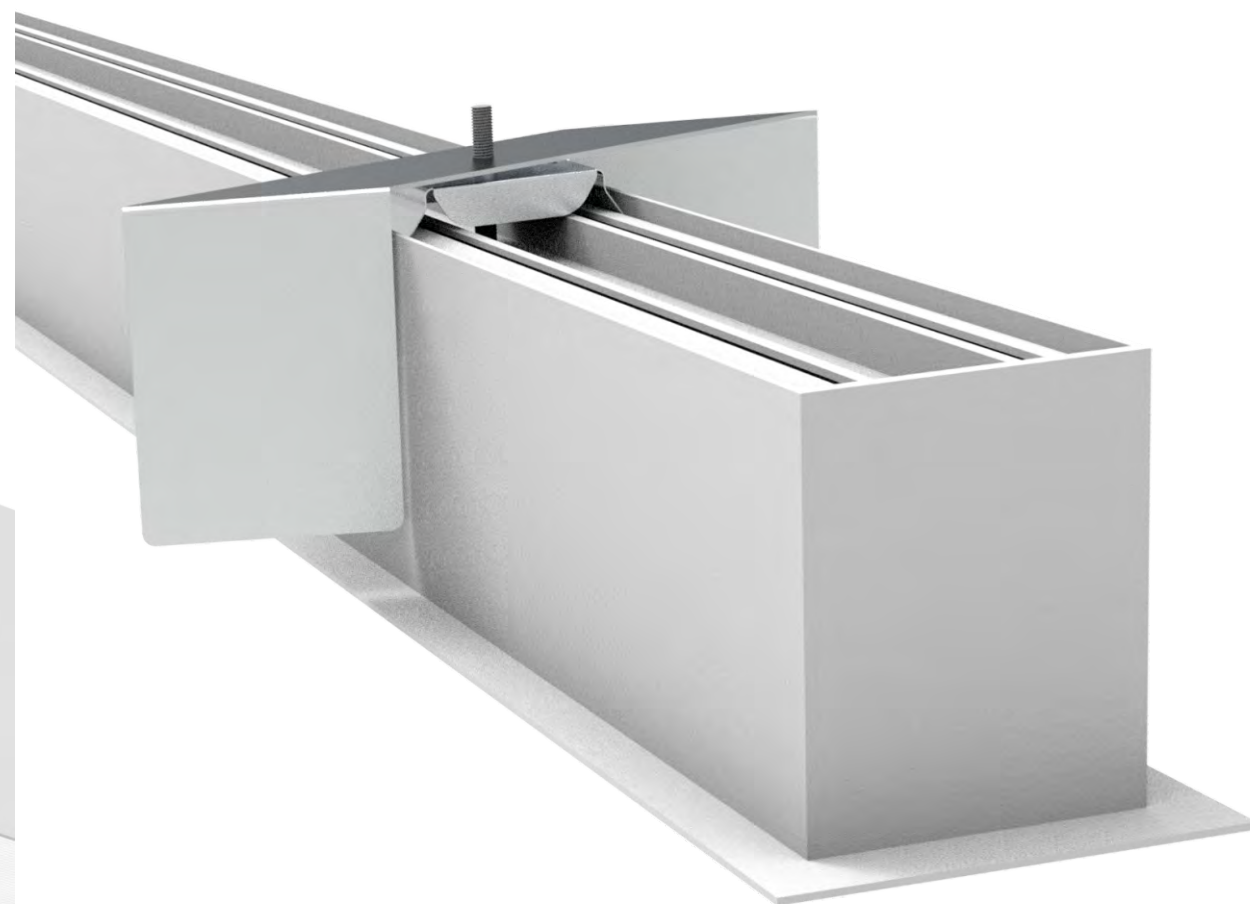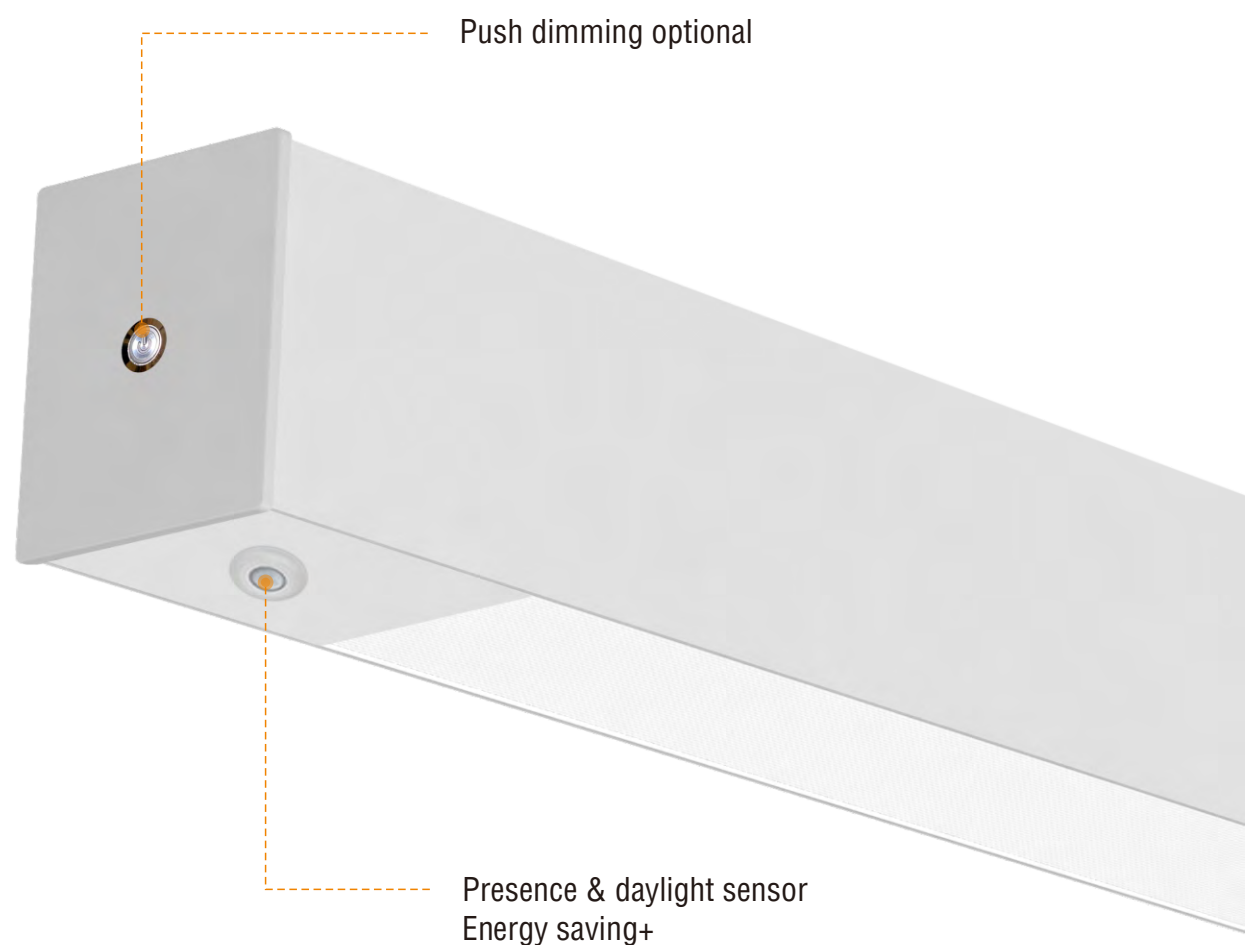

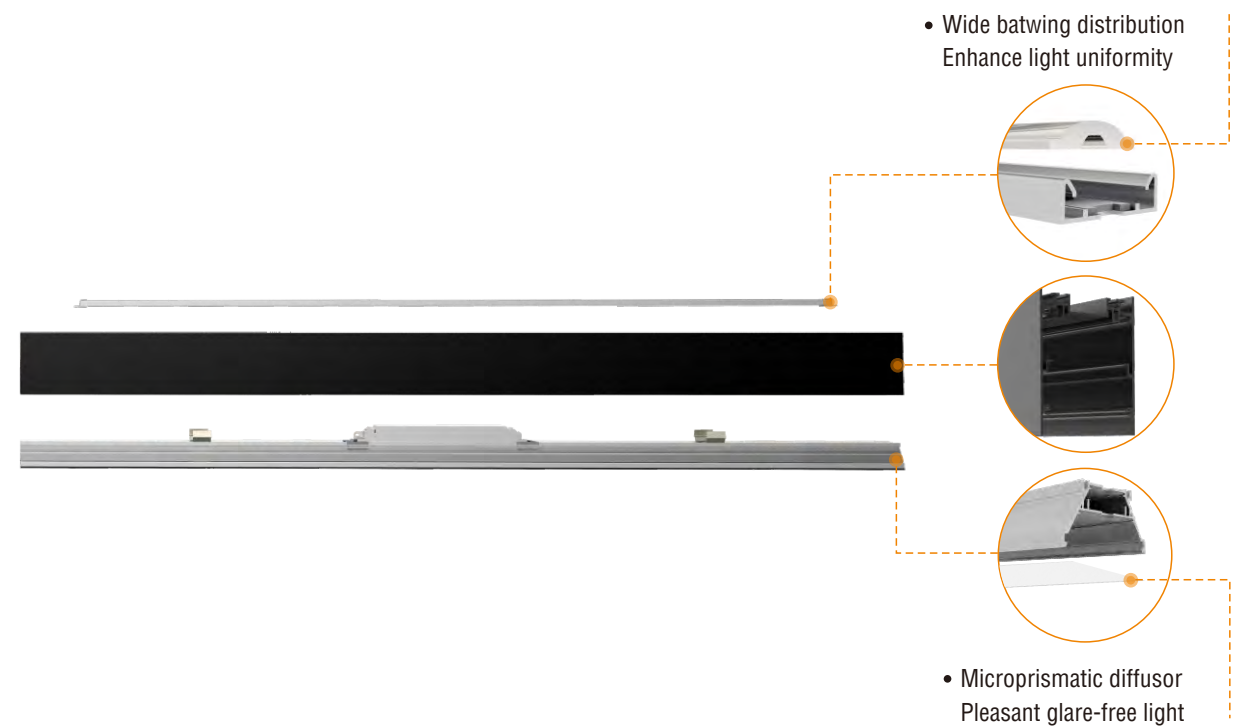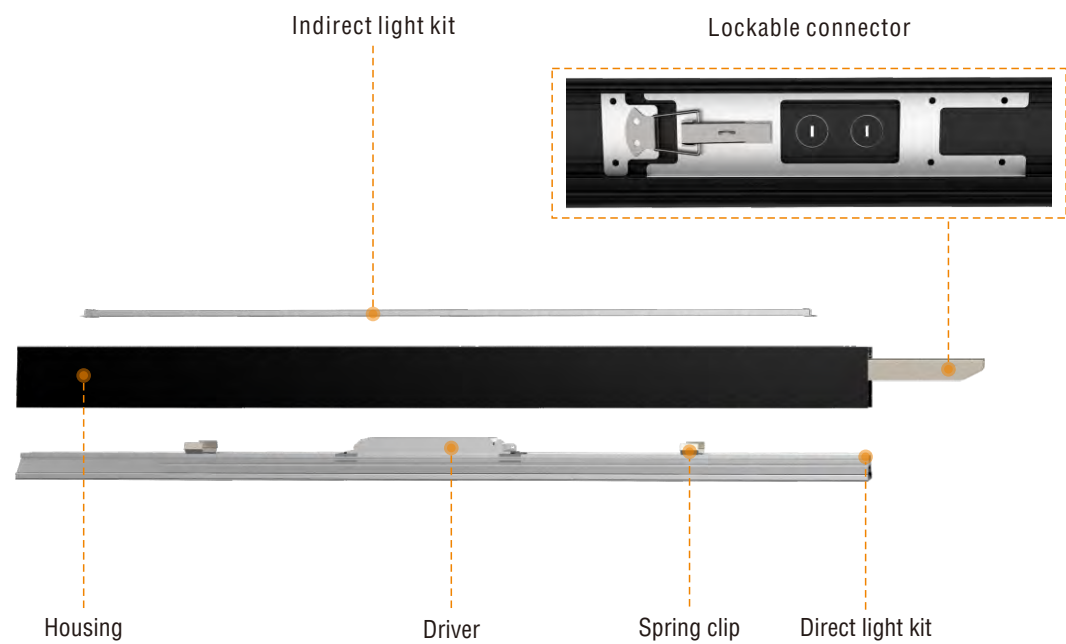
































Premline Linear Lights Details




Modular and elegant design. Fast installation. Simple maintenance

Premline Order Option

Mounting	Control	Dimensions	Configuration	Optics	CCT	Lumen	Color & Finish
 Recessed	 ON/OFF	 1200mm	 Individual	 Direct light	 3000K	1200mm  2400lm(Direct light)	 White (RAL9016)
 Pendant	 DALI	 1500mm	 Continuous start		 4000K	 3200lm(Direct light)	
 Surface-mounted	 Push Dimming	 3000mm	 Continuous middle	 Indirect/direct light	 3000K-6500K	 1600lm ↑ +2400lm ↓ (Indirect/direct light)	 Black (RAL9005)
	 Tunable White					1500mm  3000lm(Direct light)	
	 CASAMBI					 4000lm(Direct light)	
	 HCL human centric lighting					 2000lm ↑ +3000lm ↓ (Indirect/direct light)	
	 Sensor					3000mm  6000lm(Direct light)	
	 Emergency					 8000lm(Direct light)	
						 4000lm ↑ +6000lm ↓ (Indirect/direct light)	




Premline linear lights direct version

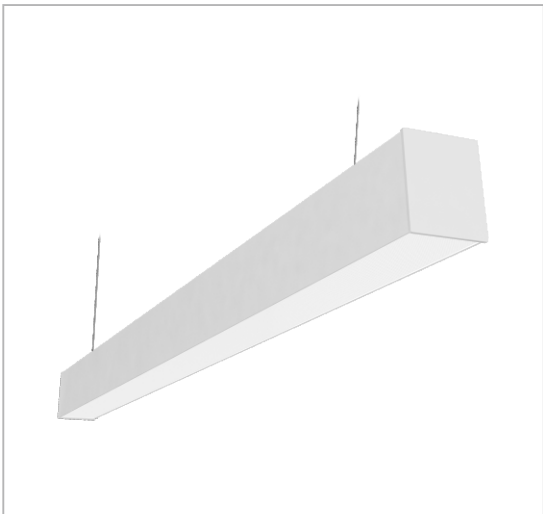

- Features
- More than 120lm/W.
  - Optimal glare control, UGR<22.
  - Seamless connection and no light leakage.
  - Individual type and continuous row optional.
  - Can be flexibly connected to myriad of shape.
  - No flickering, visual comfort.

- Application
- Office, education, communication area.



Specifications


General

- Size 1200mm, 1500mm, 3000mm
- Color Matt White(RAL9016) , MattBlack(RAL9005)
- Material Housing: Aluminium  
Diffusor: PC  
End cap: Aluminium

Electrical

- Efficacy 120lm/W
- Wattage 17W,25W@1200mm,25W,31W@1500mm  
50W,62W@3000mm
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

Dimensions



Optical


- Lumen 2400lm, 3200lm@1200mm,  
3000lm, 4000lm@1500mm  
6000lm, 8000lm@3000mm
- CCT 3000K, 4000K, 3000K-6500K tunable
- CRI >80Ra, >90Ra
- UGR C0<16,C90<16 (X=4H,Y=8H)
- SDCM ≤3

Durability

- Lifespan 50000H(L90, Tc=55°C)
- Warranty 5 years
- Operating -35~45°C
- IP Protection IP20
- IK Protection IK02




Premline linear lights indirect/direct version

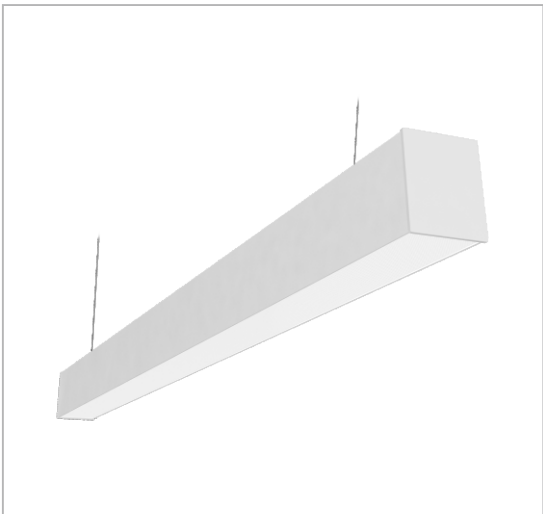

- Features
- More than 130lm/W.
  - Optimal glare control, UGR<19.
  - Seamless connection and no light leakage.
  - Individual type and continuous row optional.
  - Can be flexibly connected to myriad of shape.
  - No flickering, visual comfort.

- Application
- Office, education, communication area.



Specifications


General

- Size 1200mm, 1500mm, 3000mm
- Color Matt White(RAL9016), Matt Black(RAL9005)
- Material Housing: Aluminium  
Diffusor: PC  
End cap: Aluminium

Electrical

- Efficacy 130lm/W
- Wattage 31W@1200mm,38W@1500mm  
77W@3000mm
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

Dimensions



Optical

- Lumen 4000lm(1600lm↑+2400lm↓)@1200mm,  
5000lm(2000lm↑+3000lm↓)@1500mm  
10000lm(4000lm↑+6000lm↓)@3000mm
- CCT 3000K, 4000K, 3000K-6500K tunable
- CRI >80Ra, >90Ra
- UGR C0<16,C90<16 (X=4H,Y=8H)
- SDCM ≤3

Durability

- Lifespan 50000H(L90, Tc=55°C)
- Warranty 5 years
- Operating -35~45°C
- IP Protection IP20
- IK Protection IK02






Premline linear lights recessed version



- Features
- More than 120lm/W.
  - Optimal glare control, UGR<22.
  - Seamless connection and no light leakage.
  - Individual type us row optional.
  - Can be flexibly connected to myriad of shape.
- No flickering, visual comfort.

- Application
- Office, education, communication area.



Specifications


General

- Size 1200mm,1500mm,3000mm
- Color Matt White(RAL9016), Matt Black(RAL9005)
- Material Housing: Aluminium  
Lens: PMMA  
Louver: PC  
End cap: Aluminium

Electrical

- Efficacy 120lm/W
- Wattage 17W,25W@1200mm,25W,31W@1500mm  
50W,62W@3000mm
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

Dimensions



Optical


- Lumen 2400lm, 3200lm@1200mm,  
3000lm, 4000lm@1500mm  
6000lm, 8000lm@3000mm
- CCT 3000K, 4000K, 3000K-6500K tunable
- CRI >80Ra, >90Ra
- UGR C0<22, C90<22 (X=4H, Y=8H)
- SDCM ≤3

Durability

- Lifespan 50000H(L90, Tc=55°C)
- Warranty 5 years
- Operating -35~45°C
- IP Protection IP20
- IK Protection IK02

# Louva Evo

Glare-free and versatile  
luminaire for various mountings


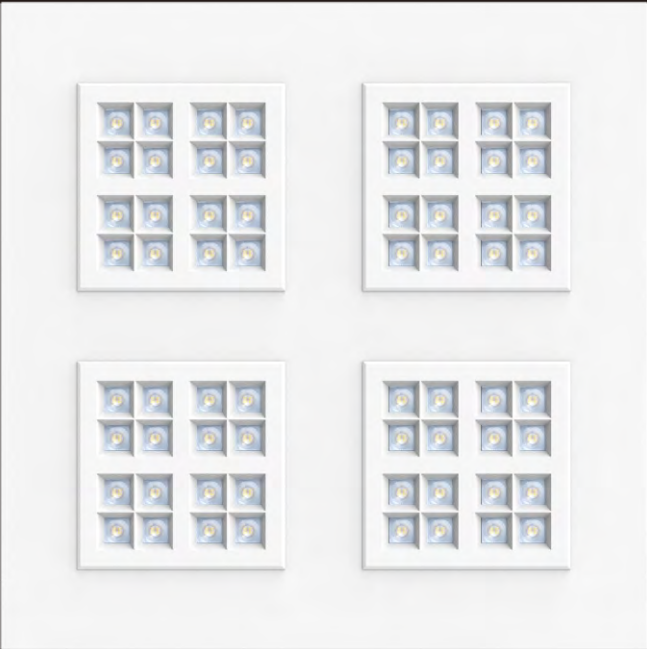





## Modernization of Louva luminaire

As the next generation of louvre luminaire, Louva Evo is the perfect combination of optic design and architectural aesthetics. Thanks to its distinct module with square lens, the luminaire will impress you with its elegant appearance.

Two beam optics

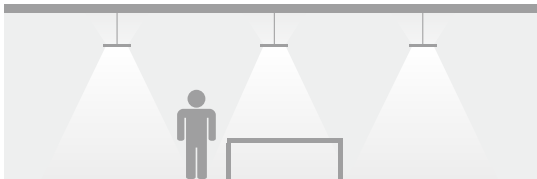
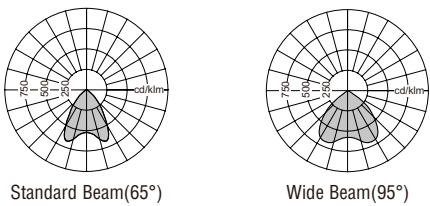



**Standard beam optic for excellent glare control**  
Standard beam version provides highly efficient focus lights and excellent glare control for office workstations, compliant with EN12464-1:2011 (UGR<16, L65<1500cd/m²)

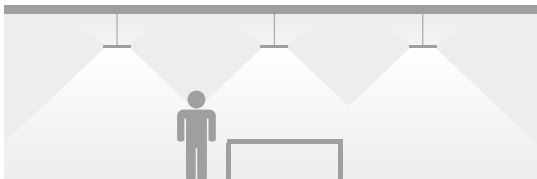

**Wide beam optic for high uniformity**  
Wide beam version offers maximum uniformity with standard-compliant glare control (UGR<19. L65<3000cd/m²) for circulation area or working area with lower ceiling where there is demand on high light uniformity.


Indirect/direct lights

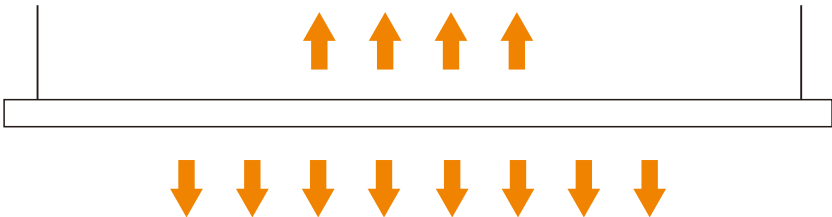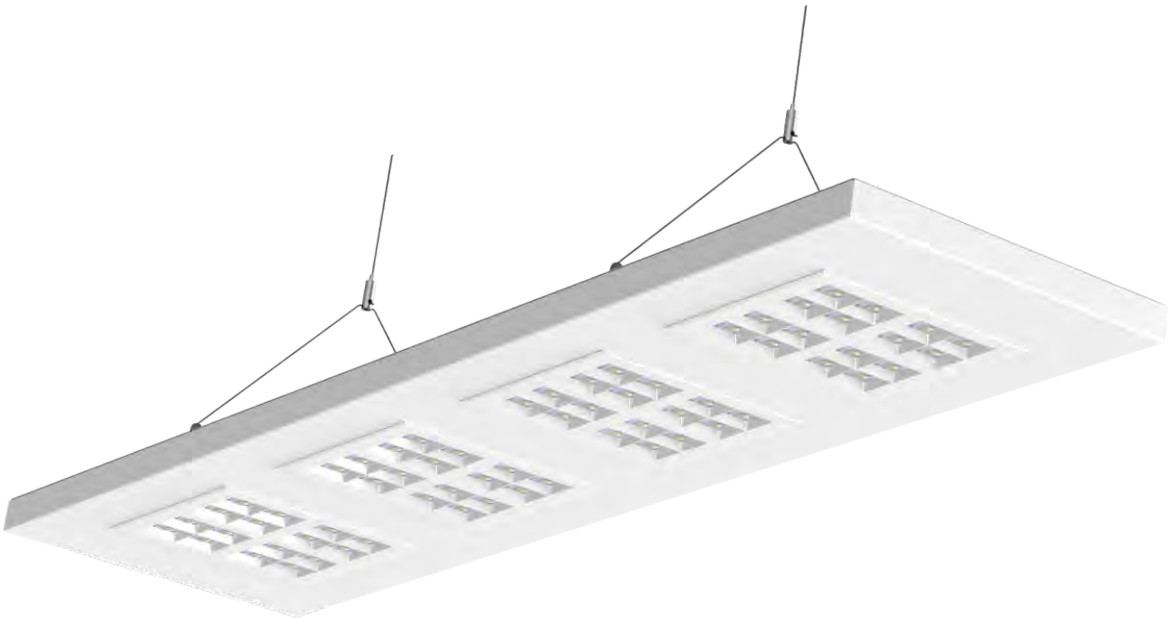

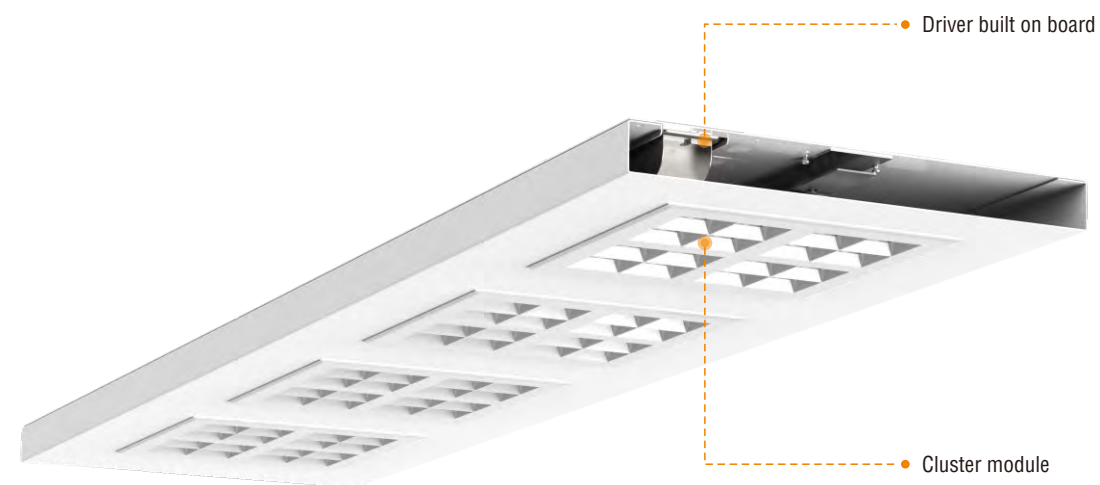


## Easy installation for different ceiling

Owing to the standard-complaint dimension and lumen package, Louva Evo could be installed in variety of ceilings in a few simple steps and perfectly suit for lighting refurbishment projects.



Rectangular



Square




Mini

## Fast maintenance

Thanks to the modular design, both the cluster module and driver can be easily assembled and disassembled for maintenance.




Louva Evo Luminaire Details

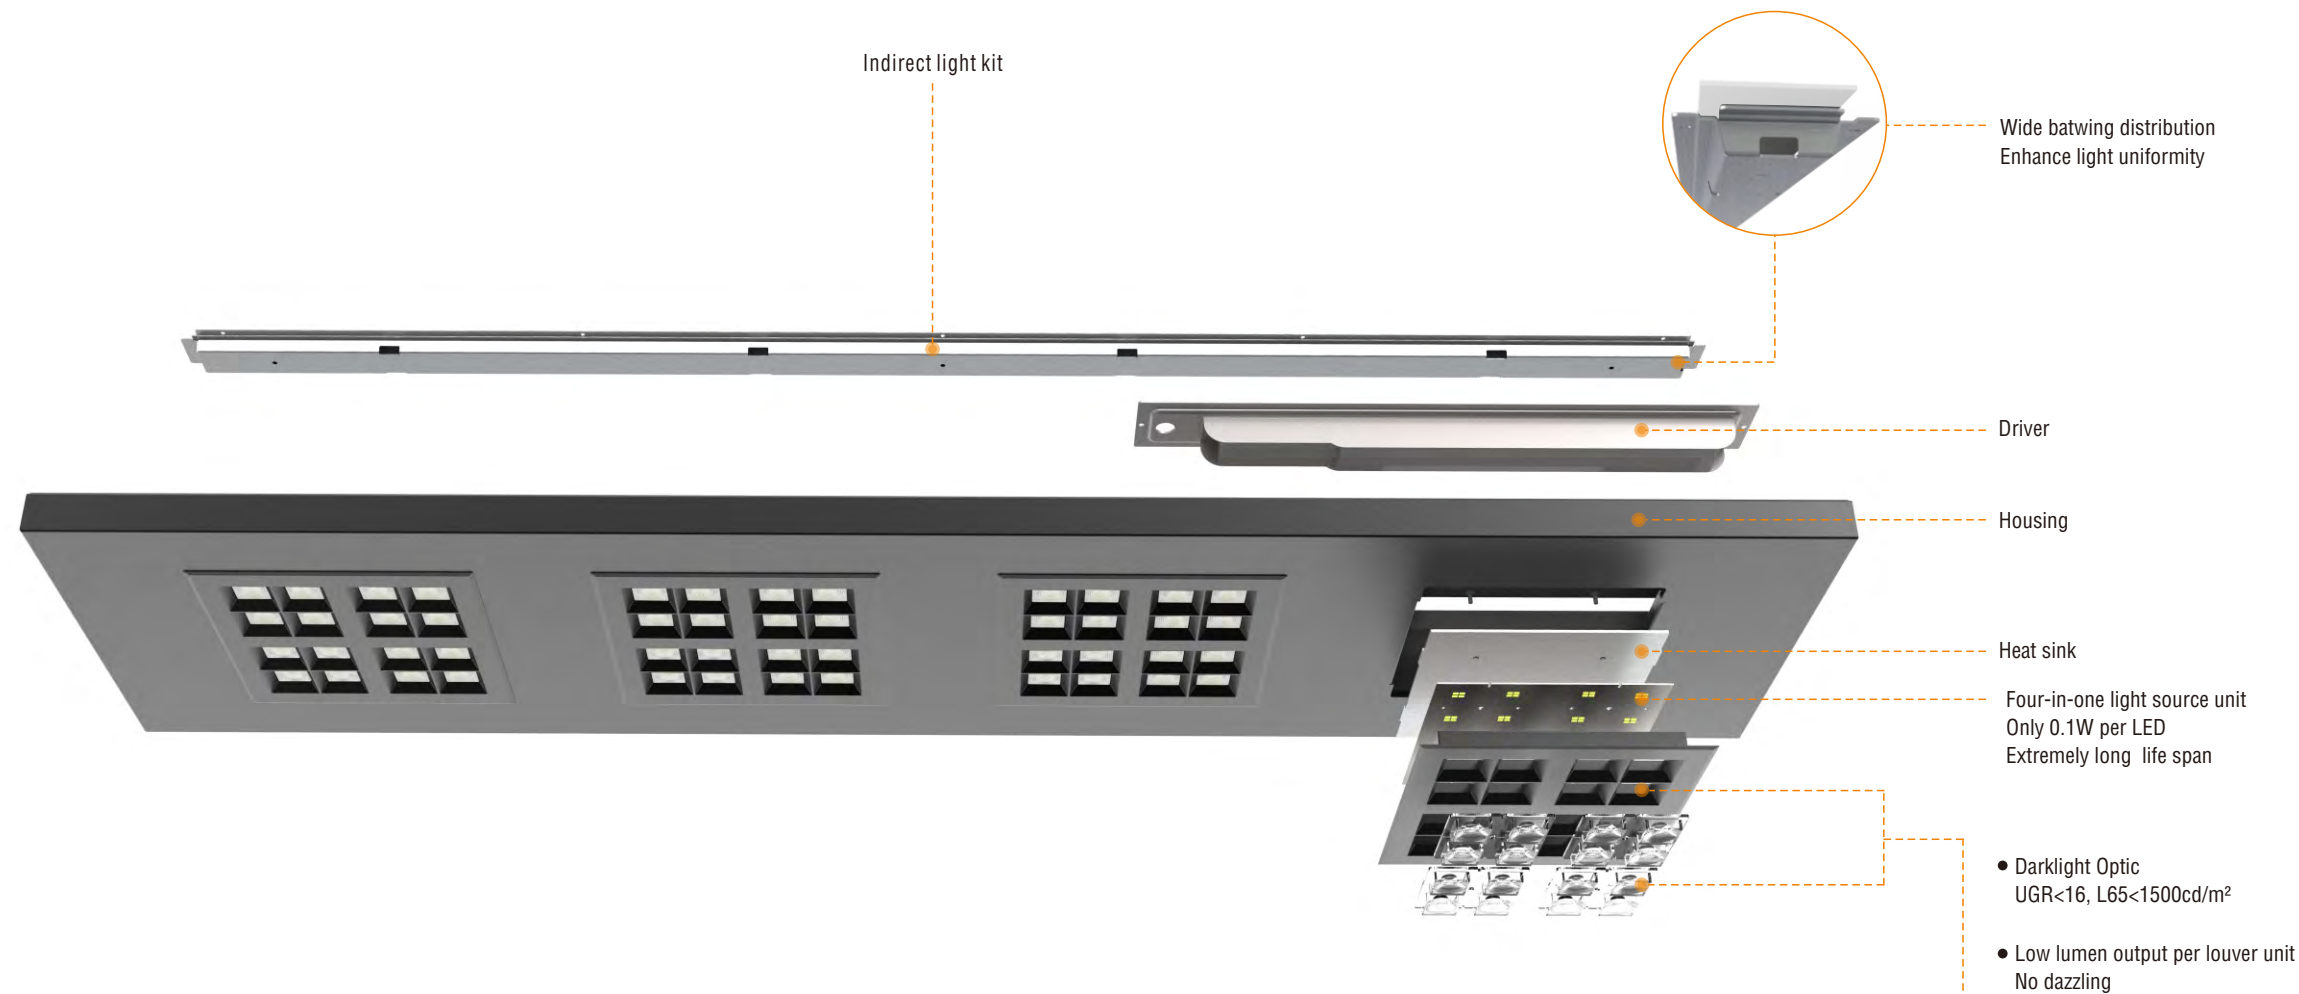


Modular design. Fast mounting. Easy maintenance

Louva Evo Order Option

Shapes



Square

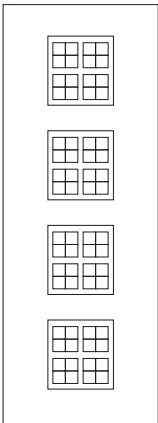

Rectangular




Mini


Mounting



Lay-in



Pendant



Surface-mounted

Control



ON/OFF



DALI



Tunable White



CASAMBI



HCL human centric lighting




Sensor




Emergency


Optics




Standard beam



Wide beam




Standard beam Indirect/direct




Wide beam Indirect/direct

CCT



3000K



4000K



3000K-6500K


Lumen



3200lm (Direct)




4000lm (Direct)



4800lm (Indirect /direct)

Color & Finish





White (RAL9016)



Black (RAL9005)

Louva Evo square luminaire

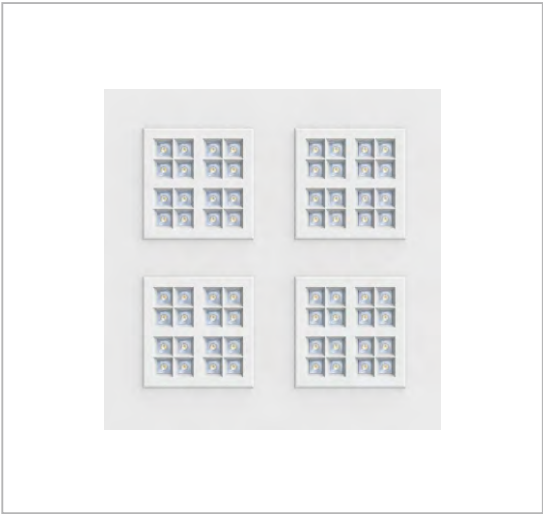

Specifications


General

- Size 595x595mm, 620x620mm
- Color Matt White(RAL9016), Matt Black(RAL9005)
- Material Housing: Steel  
Lens: PMMA  
Louver reflector: PC

Electrical

- Efficacy Up to 130lm/W
- Wattage 26W, 29W
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

Dimensions

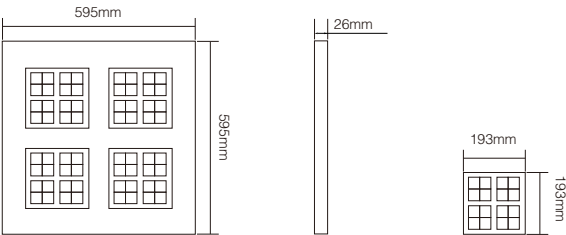


Features

- UGR<16, glare-free and uniform light.
- Elegant and modular design.
- Easy installation and replacement.
- Up to 130lm/W.
- Versatile for variety of mountings.
- No flickering, visual comfort.

Application

- Office, education, communication area.

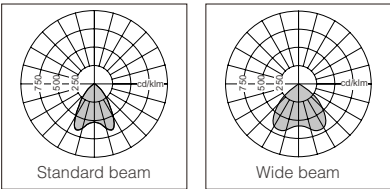



Optical

- Lumen 3200lm, 4000lm
- CCT 3000K, 4000K, 3000K-6500K tunable
- CRI >80Ra, >90Ra
- UGR C0<16,C90<16 (X=4H,Y=8H)@65°  
C0<19,C90<19 (X=4H,Y=8H)@95°
- SDCM ≤3

Durability

- Lifespan 50000H(L90, Tc=55°C)
- Warranty 5 years
- Operating -35~45°C
- IP Protection IP20
- IK Protection IK05

Louva Evo rectangular luminaire

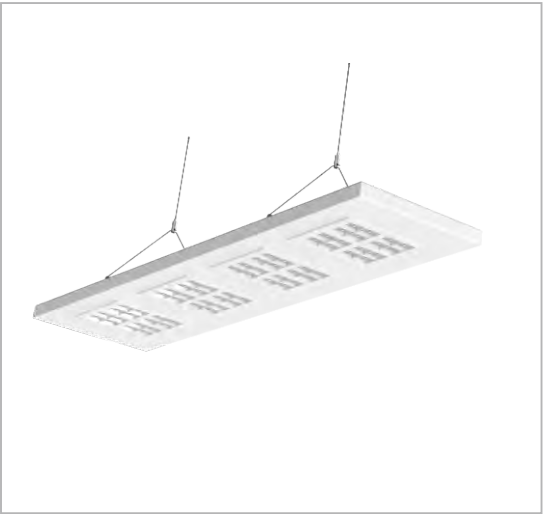

Specifications

General

- Size 295x1195mm
- Color Matt White(RAL9016), Matt Black(RAL9005)
- Material Housing: Steel  
Lens: PMMA  
Louver reflector: PC

Electrical

- Efficacy Up to 140lm/W
- Wattage 26W, 29W, 33W
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

Dimensions




Features

- UGR<16, glare-free and uniform light.
- Elegant and modular design.
- Easy installation and replacement.
- Up to 140lm/W.
- Versatile for variety of mountings.
- No flickering, visual comfort.

Application

- Office, education, communication area.

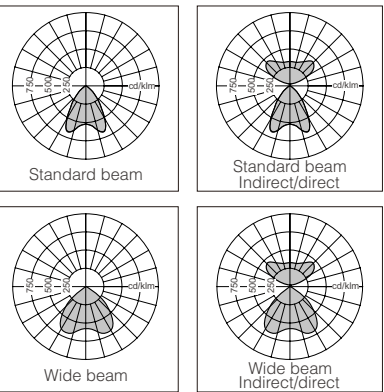

Optical

- Lumen 3200lm,4000lm,4800lm(1600lm↑+3200lm↓)
- CCT 3000K, 4000K, 3000K-6500K tunable
- CRI >80Ra, >90Ra
- UGR C0<16,C90<16 (X=4H,Y=8H)@65°  
C0<19,C90<19 (X=4H,Y=8H)@95°
- SDCM ≤3


Durability

- Lifespan 50000H(L90, Tc=55°C)
- Warranty 5 years
- Operating -35~45°C
- IP Protection IP40
- IK Protection IK05

Act as square downlight



Act as customized luminaire configurater

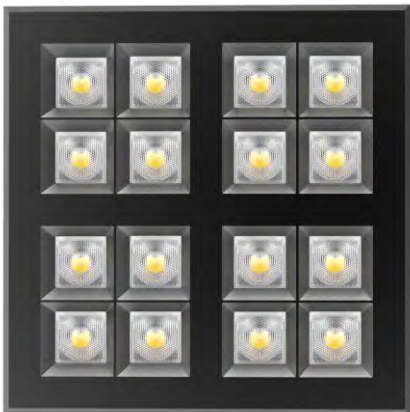

Louva Evo downlight



Specifications


General

- Size 193x193mm
- Color Matt White(RAL9016), Matt Black(RAL9005)
- Material Housing: Steel  
Lens: PMMA  
Louver reflector: PC

Electrical

- Efficacy Up to 135lm/W
- Wattage 12W,15W
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

Dimensions

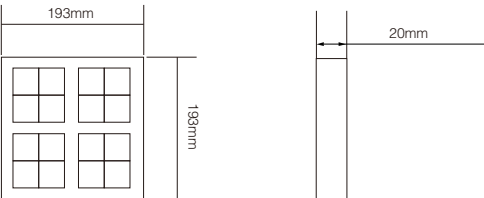


Features

- UGR<19, glare-free and uniform light.
- Elegant and modular design.
- Easy installation and replacement.
- Up to 135lm/W.
- No flickering, visual comfort.

Application

- Office, education, communication area.

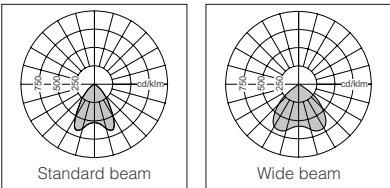

Optical


- Lumen 1500lm,2000lm
- CCT 3000K, 4000K, 3000K-6500K tunable
- CRI >80Ra, >90Ra
- UGR C0<19,C90<19 (X=4H,Y=8H)@65°  
C0<22,C90<22 (X=4H,Y=8H)@95°
- SDCM ≤3

Durability

- Lifespan 50000H(L90, Tc=55°C)
- Warranty 5 years
- Operating -35~45°C

# Prisma

Rectangular and circular luminaires

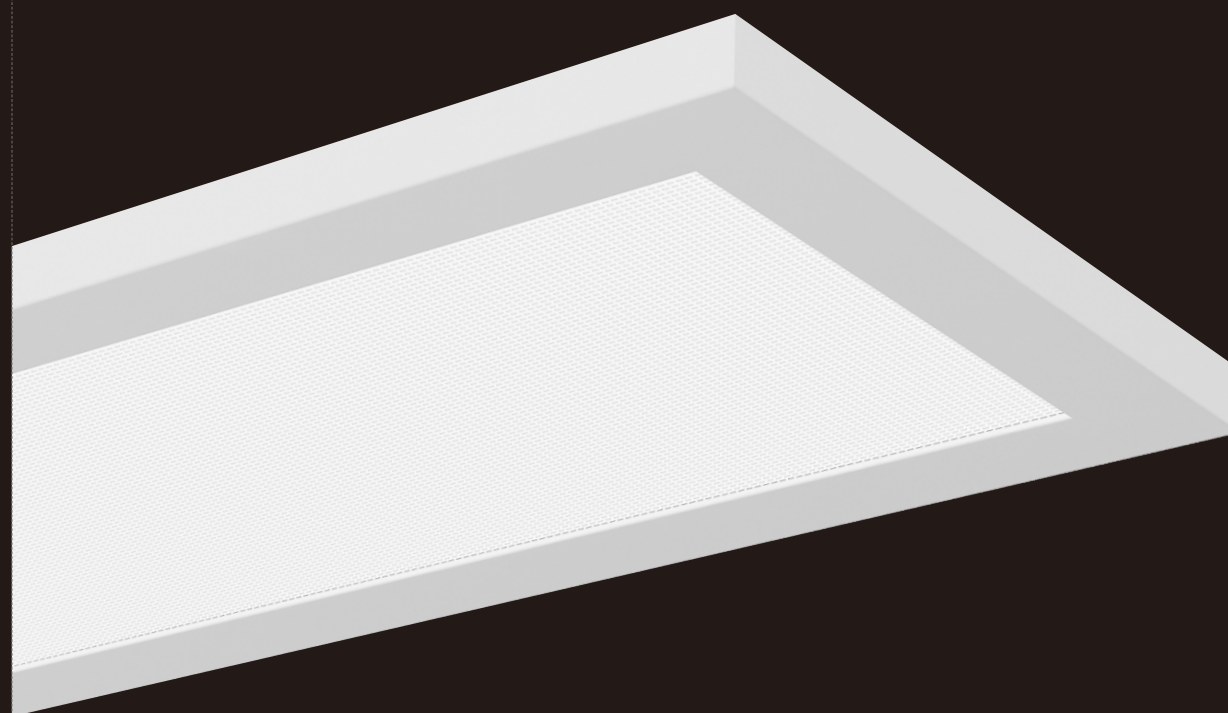






## Aesthetic design Ultra slim

Owing to its ultra slim profile and streamline appearance, Prisma could highly meets the modern architectural lighting design concept.

Prisma Order Option


MICROPRISMATIC

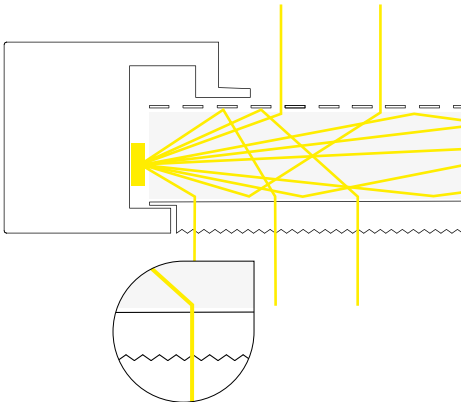


Uniform light  
Optimal distribution

Thanks to the microprismatic diffuser, the luminaire could offer optimal UGR control light. Furthermore, both its direct and indirect light could help create a pleasant light atmosphere.

Shapes



Rectangular



Circular

Control




ON/OFF




DALI

CCT



3000K



4000K

Lumen




4800lm



6000lm

Color & Finish



White  
(RAL9016)




Black  
(RAL9005)

Prisma rectangular luminaire



- Features
- Aesthetic design, ultra slim.
  - Uniform indirect light(40%) and direct light (60%)
  - Easy installation and replacement.
  - Microprismatic optic, optimal glare control.
  - High light efficiency of more than 120lm/W.
  - No flickering, visual comfort.
- Application
- Reception and open area for office, education, etc.



Specifications


General

- Size 295x1195mm
- Color Matt White(RAL9016), Matt Black(RAL9005)
- Material Frame: Aluminium  
Lens: PMMA  
Diffusor: Microprismatic PMMA

Electrical

- Efficacy 120lm/W
- Wattage 40W, 50W
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

Dimensions

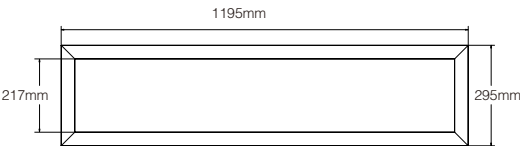


Optical

- Lumen 4800lm(1600lm↑+3200lm↓)  
6000lm(2000lm↑+4000lm↓)
- CCT 3000K, 4000K, 3000K-6500K tunable
- CRI >80Ra, >90Ra
- UGR C0<19,C90<19 (X=4H,Y=8H)
- SDCM ≤3

Durability


- Lifespan 50000H(L90, Tc=55°C)
- Warranty 5 years
- Operating -35~45°C
- IP Protection IP20
- IK Protection IK02



Prisma circular luminaire



- Features
- Aesthetic design, ultra slim.
  - Uniform indirect light(40%) and direct light (60%)
  - Easy installation and replacement.
  - Microprismatic optic, optimal glare control.
  - High light efficiency of more than 100lm/W.
  - No flickering, visual comfort.
- Application
- Reception and open area for office, education, etc.



Specifications


General

- Size Φ580mm
- Color Matt White(RAL9016), Matt Black(RAL9005)
- Material Frame: Aluminium  
LGP: PMMA  
Diffusor: Microprismatic PMMA

Electrical

- Efficacy 100lm/W
- Wattage 40W
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

Dimensions

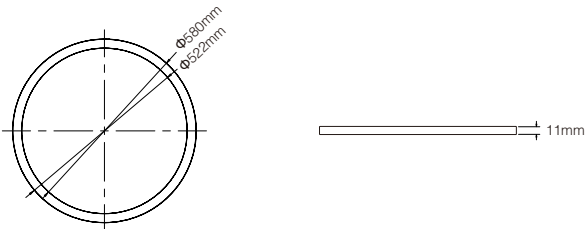

Optical

- Lumen 4000lm(1400lm↑+2700lm↓)
- CCT 3000K, 4000K, 3000K-6500K tunable
- CRI >80Ra, >90Ra
- UGR C0<19,C90<19 (X=4H,Y=8H)
- SDCM ≤3

Durability

- Lifespan 50000H(L90, Tc=55°C)
- Warranty 5 years
- Operating -35~45°C
- IP Protection IP20
- IK Protection IK02

# Accessories

## Accessories for Viewline and Premline



Rod pendant kit



Cord pendant kit



Ceiling mounted clip



Recessed bracket



Junction box




Motion & daylight sensor

## Accessories for Louva Evo



Cord pendant kit



Ceiling mounted frame



Junction box



Motion & daylight sensor

## Accessories for Prisma



Cord pendant kit



Driver box