

AT-1019




Description

Body: Galvanized steel plate after jointing welding.
Optical system: Anodized aluminum reflector and PMMA high transparent diffuser.
Gear plate: Galvanized steel plate, special screw fastening.
Finishing: Surface anti-raging electrostatic spray processing, super resistance to corrosion.
Assembling height: 4-6m.
Fixing: Top fitting Ø60mm or 3/4" gas thread.



Optical Application

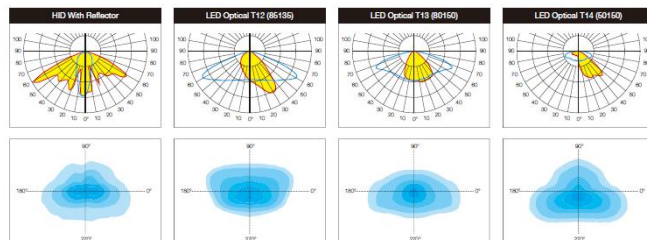

100V-277V
50-60Hz

>50000 h



Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1019 (20)	20W	100-277	11.4	12.6	425 * 425 * 743
AT-1019 (30)	30W	100-277			
AT-1019 (40)	40W	100-277			
AT-1019 (50)	50W	100-277			
AT-1019 (60)	60W	100-277			

AT-1022




Description

Body: Galvanized steel plate after jointing welding.
Optical system: Anodized aluminum reflector and PMMA high transparent diffuser.
Gear plate: Galvanized steel plate, special screw fastening.
Finishing: Surface anti-raging electrostatic spray processing, super resistance to corrosion.
Assembling height: 4-6m.
Fixing: Top fitting Ø60mm or 3/4" gas thread.




Optical Application

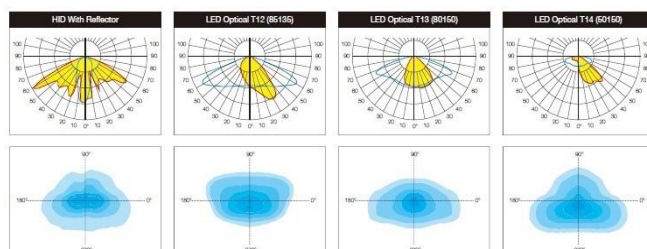

100V-277V
50-60Hz

>50000 h



Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1022 (30)	30W	100-277	10.4	11.6	560 * 560 * 230
AT-1022 (60)	60W	100-277			
AT-1022 (90)	90W	100-277			
AT-1022 (120)	120W	100-277			



AT-1023



Description

Body: Galvanized steel plate after jointing welding.
Optical system: Anodized aluminum reflector and PMMA high transparent diffuser.
Gear plate: Galvanized steel plate, special screw fastener.
Finishing: Surface anti-aging electrostatic spray processing, super resistance to corrosion.
Assembling height: 4-m.
Fixing: Top fitting Ø60mm or 3/4" gas thread.



Green Energy Worldwide Technology Co.,LTD

www.green-energy-worldwide-technology.com

AT-1025



Description

Body: Galvanized steel plate after jointing welding.
Optical system: Anodized aluminum reflector and PMMA high transparent diffuser.
Gear plate: Galvanized steel plate, special screw fastener.
Finishing: Surface anti-aging electrostatic spray processing, super resistance to corrosion.
Assembling height: 4-m.
Fixing: Top fitting Ø76mm.





Green Energy Worldwide Technology Co.,LTD

www.green-energy-worldwide-technology.com



Optical Application




Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1023 (30)	30W	100-277	7.4	8.6	660*660*460
AT-1023 (40)	40W	100-277			
AT-1023 (50)	50W	100-277			
AT-1023 (60)	60W	100-277			




Optical Application


Type1

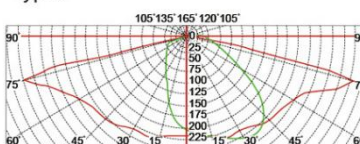

Type2




Type3

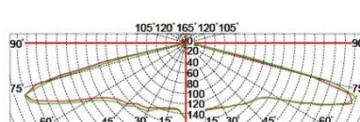

100V-277V
50-60Hz

>50000 h



Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1025 (30)	30W	100-277	9.2	11.5	605 * 605 * 750
AT-1025 (40)	40W	100-277			
AT-1025 (50)	50W	100-277			
AT-1025 (60)	60W	100-277			

AT-1026



Description

Body: Galvanized steel plate after jointing welding.
Optical system: Anodized aluminum reflector and PMMA high transparent diffuser.
Gear plate: Galvanized steel plate, special screw fastening.
Finishing: Surface anti-aging electrostatic spray processing, super resistance to corrosion.
Assembling height: 4-6m.
Fixing: Top fixing Ø76mm.



Green Energy Worldwide Technology Co.,LTD

www.green-energy-worldwide-technology.com

AT-1027



Description

Body: Galvanized steel plate after jointing welding.
Optical system: Anodized aluminum reflector and PMMA high transparent diffuser.
Gear plate: Galvanized steel plate, special screw fastening.
Finishing: Surface anti-aging electrostatic spray processing, super resistance to corrosion.
Assembling height: 4-6m.
Fixing: Top fixing Ø76mm.




Green Energy Worldwide Technology Co.,LTD

www.green-energy-worldwide-technology.com




Optical Application

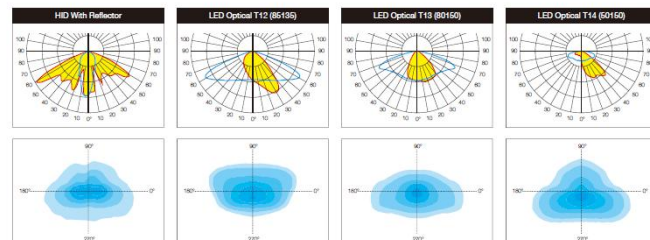

100W-277V
50-60Hz

>50000 h

Dimensions




Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1026 (20)	20W	100-277	12.2	13.8	650 * 650 * 217
AT-1026 (30)	30W	100-277			
AT-1026 (40)	40W	100-277			
AT-1026 (50)	50W	100-277			
AT-1026 (60)	60W	100-277			




Optical Application

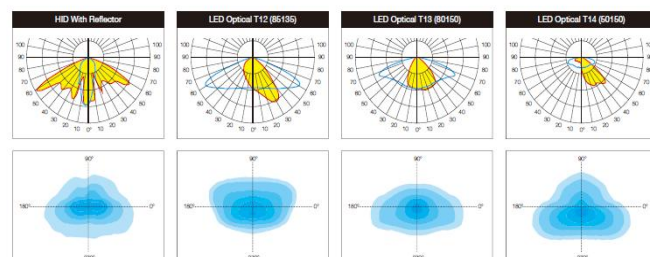

100W-277V
50-60Hz

>50000 h

Dimensions

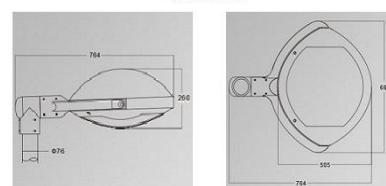

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1027 (20)	20W	100-277	12.2	13.8	666 * 260 * 764
AT-1027 (30)	30W	100-277			
AT-1027 (40)	40W	100-277			
AT-1027 (50)	50W	100-277			
AT-1027 (60)	60W	100-277			

AT-1028



Description

Body: Galvanized steel plate after jointing welding.
Optical system: Anodized aluminum reflector and PMMA high transparent diffuser.
Gear plate: Galvanized steel plate, special screw fastening.
Finishing: Surface anti-aging electrostatic spray processing, super resistance to corrosion.
Assembling height: 4-6m.
Fixing: Top fitting Ø76mm.



Green Energy Worldwide Technology Co.,LTD

www.green-energy-worldwide-technology.com

AT-1029



Description

Body: Galvanized steel plate after jointing welding.
Optical system: Anodized aluminum reflector and PMMA high transparent diffuser.
Gear plate: Galvanized steel plate, special screw fastening.
Finishing: Surface anti-aging electrostatic spray processing, super resistance to corrosion.
Assembling height: 4-6m.
Fixing: Top fitting Ø76mm.




Green Energy Worldwide Technology Co.,LTD

www.green-energy-worldwide-technology.com




Optical Application

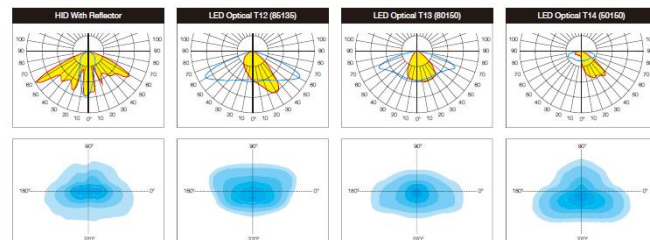

100W-277V
50-60Hz

>50000 h

Dimensions




Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1028 (20)	20W	100-277	12.0	13.4	620 * 620 * 800
AT-1028 (30)	30W	100-277			
AT-1028 (40)	40W	100-277			
AT-1028 (50)	50W	100-277			
AT-1028 (60)	60W	100-277			




Optical Application

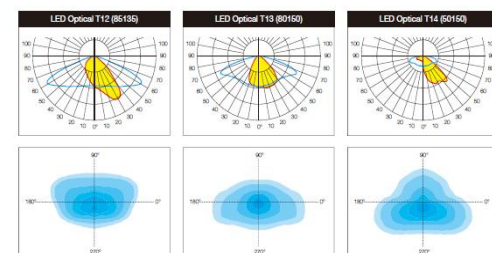

100W-277V
50-60Hz

>50000 h

Dimensions

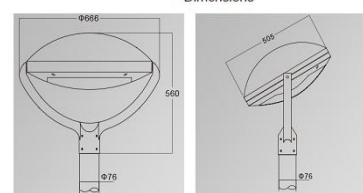

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1029 (20)	20W	100-277	12.2	13.8	666 * 666 * 560
AT-1029 (30)	30W	100-277			
AT-1029 (40)	40W	100-277			
AT-1029 (50)	50W	100-277			
AT-1029 (60)	60W	100-277			

AT-1030



Description

Body: Galvanized steel plate after jointing welding.
Optical system: Anodized aluminum reflector and PMMA high transparent diffuser.
Gear plate: Galvanized steel plate, special screw fastening.
Finishing: Surface anti-aging electrostatic spray processing, super resistance to corrosion.
Assembling height: 4-6m.
Fixing: Top fitting Ø78mm.




Green Energy Worldwide Technology Co.,LTD

www.green-energy-worldwide-technology.com




Optical Application

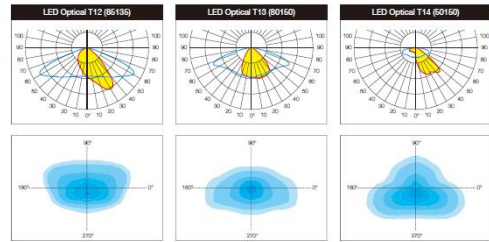

100V-277V
50-60Hz

>50000 h

Dimensions



Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1030 (20)	20W	100-277	10.2	12.5	650 * 650 * 674
AT-1030 (30)	30W	100-277			
AT-1030 (40)	40W	100-277			
AT-1030 (50)	50W	100-277			
AT-1030 (60)	60W	100-277			

AT-1031




Description

Body: Die-cast aluminum.
Optical system: Anodized aluminum reflector and PC diffuser.
Gear plate: Galvanized steel plate.
Finishing: Surface anti-aging electrostatic spray processing, super resistance to corrosion.
Assembling height: 4-6m.
Fixing: Top fitting Ø60mm / Ø78mm.



Optical Application

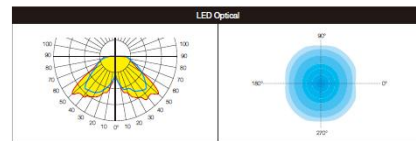

100V-277V
50-60Hz

>50000 h

Dimensions



Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1031 (30)	30W	100-277	10.2	12.5	690 * 690 * 480
AT-1031 (40)	40W	100-277			
AT-1031 (50)	50W	100-277			
AT-1031 (60)	60W	100-277			
AT-1031 (80)	80W	100-277			



Green Energy Worldwide Technology Co.,LTD

www.green-energy-worldwide-technology.com

AT-1032



Description

Body: Galvanized steel plate after jointing welding.
Optical system: Anodized aluminum reflector and PMMA high transparent diffuser.
Gear plate: Galvanized steel plate, special screw fastening.
Finishing: Surface anti-aging electrostatic spray processing, super resistance to corrosion.
Assembling height: 4-6m.
Fixing: Top fitting Ø76mm.



Green Energy Worldwide Technology Co.,LTD

www.green-energy-worldwide-technology.com

AT-1035




Description

Body: Galvanized steel plate after jointing welding.
Optical system: Anodized aluminum reflector and PMMA high transparent diffuser.
Gear plate: Galvanized steel plate, special screw fastening.
Finishing: Surface anti-aging electrostatic spray processing, super resistance to corrosion.
Assembling height: 4-6m.
Fixing: Top fitting Ø60mm / Ø76mm.




Green Energy Worldwide Technology Co.,LTD

www.green-energy-worldwide-technology.com

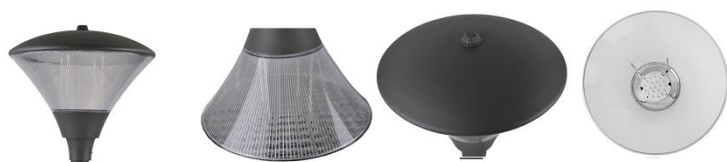


Optical Application

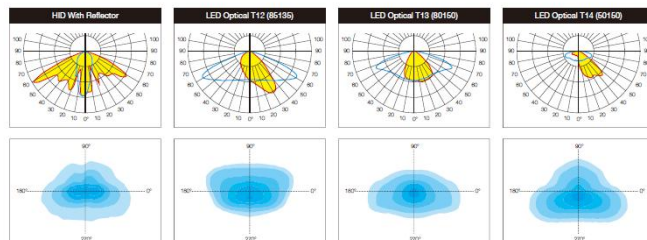

100W-277V
50-60Hz

>50000 h

Dimensions




Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1032 (30)	20W	100-277	12.6	13.8	593 * 593 * 523
AT-1032 (40)	30W	100-277			
AT-1032 (50)	40W	100-277			
AT-1032 (60)	50W	100-277			
AT-1032 (80)	60W	100-277			




Optical Application

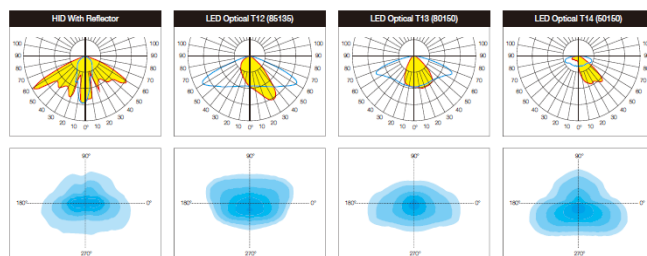

100W-277V
50-60Hz

>50000 h



Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1035 (20)	20W	100-277	10.0	11.4	481 * 481 * 290
AT-1035 (30)	30W	100-277			
AT-1035 (40)	40W	100-277			
AT-1035 (50)	50W	100-277			
AT-1035 (60)	60W	100-277			

AT-1039



Description

Body: Die-cast aluminum.
Optical system: Anodized aluminum reflector and PO diffuser.
Gear plate: Galvanized steel plate.
Finishing: Surface anti-aging electrostatic spray processing, super resistance to corrosion.
Assembling height: 4-6m.
Fixing: Ø38mm tube hanging.



Green Energy Worldwide Technology Co.,LTD

www.green-energy-worldwide-technology.com

AT-1041



Description

Body: Galvanized steel plate after jointing welding.
Optical system: Anodized aluminum reflector and PMMA high transparent diffuser.
Gear plate: Galvanized steel plate, special screw fastening.
Finishing: Surface anti-aging electrostatic spray processing, super resistance to corrosion.
Assembling height: 4-6m.
Fixing: Top fitting Ø60mm




Green Energy Worldwide Technology Co.,LTD

www.green-energy-worldwide-technology.com




Optical Application

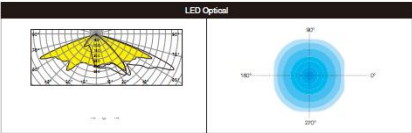

100V-277V
50-60Hz

>50000 h

Dimensions




Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1039 (20)	20W	100-277	9.8	10.9	560 * 560 * 411
AT-1039 (30)	30W	100-277			
AT-1039 (40)	40W	100-277			
AT-1039 (50)	50W	100-277			
AT-1039 (60)	60W	100-277			




Optical Application

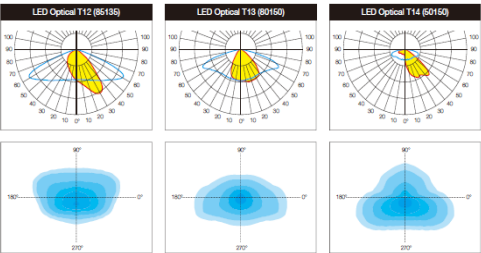

100V-277V
50-60Hz

>50000 h

Dimensions



Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1041 (20)	20W	100-277	9.9	10.9	481 * 481 * 397
AT-1041 (30)	30W	100-277			
AT-1041 (40)	40W	100-277			
AT-1041 (50)	50W	100-277			
AT-1041 (60)	60W	100-277			
AT-1041 (80)	80W	100-277			

AT-1042



Description

Body: Galvanized steel plate after jointing welding.
Optical system: Anodized aluminum reflector and PMMA high transparent diffuser.
Gear plate: Galvanized steel plate, special screw fastening.
Finishing: Surface anti-aging electrostatic spray processing, super resistance to corrosion.
Assembling height: 4-6m.
Fixing: Top fitting Ø60mm / Ø76mm.



Green Energy Worldwide Technology Co.,LTD

www.green-energy-worldwide-technology.com

AT-1044



Description

Body: Galvanized steel plate after jointing welding.
Optical system: Anodized aluminum reflector and PMMA high transparent diffuser.
Gear plate: Galvanized steel plate, special screw fastening.
Finishing: Surface anti-aging electrostatic spray processing, super resistance to corrosion.
Assembling height: 4-6m.
Fixing: Top fitting Ø60mm / Ø76mm.





Green Energy Worldwide Technology Co.,LTD

www.green-energy-worldwide-technology.com



Optical Application

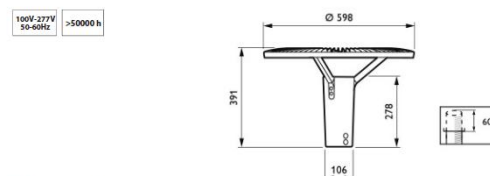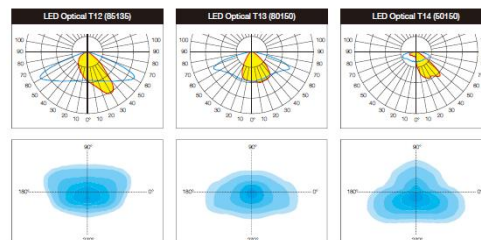


Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1042 (20)	20W	100-277	10.7	11.9	598 * 598 * 391
AT-1042 (30)	30W	100-277			
AT-1042 (40)	40W	100-277			
AT-1042 (50)	50W	100-277			
AT-1042 (60)	60W	100-277			



Optical Application



Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1044 (40)	40W	100-277	10.4	11.6	350 * 700 * 150
AT-1019 (60)	60W	100-277			
AT-1019 (80)	80W	100-277			
AT-1019 (100)	100W	100-277			
AT-1019 (120)	120W	100-277			

AT-1045



Description

Body: Galvanized steel plate after jointing welding.
Optical system: Anodized aluminum reflector and PMMA high transparent diffuser.
Gear plate: Galvanized steel plate, special screw fastening.
Finishing: Surface anti-aging electrostatic spray processing, super resistance to corrosion.
Assembling height: 4-6m.
Fixing: Top fitting Ø60mm / Ø76mm.



Optical Application



Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1045 (80)	80W	100-277	10.9	11.9	690 * 690 * 250
AT-1045 (100)	100W	100-277			
AT-1045 (120)	120W	100-277			



Green Energy Worldwide Technology Co.,LTD

www.green-energy-worldwide-technology.com

AT-1046




Description

Body: Galvanized steel plate after jointing welding.
Optical system: Anodized aluminum reflector and PMMA high transparent diffuser.
Gear plate: Galvanized steel plate, special screw fastening.
Finishing: Surface anti-aging electrostatic spray processing, super resistance to corrosion.
Assembling height: 4-6m.
Fixing: Top fitting Ø60mm / Ø76mm.



Optical Application

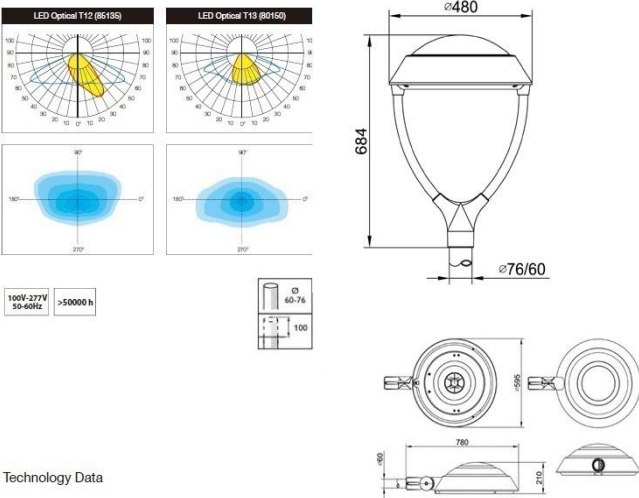

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1046 (30)	30W	100-277	10.2	11.4	520 * 520 * 700
AT-1046 (40)	40W	100-277			
AT-1046 (60)	60W	100-277			
AT-1046 (80)	80W	100-277	12.5	13.4	620 * 620 * 700
AT-1046 (100)	100W	100-277			
AT-1046 (120)	120W	100-277			



Green Energy Worldwide Technology Co.,LTD

www.green-energy-worldwide-technology.com

AT-1047



Description

Body: Galvanized steel plate after jointing welding.
Optical system: Anodized aluminum reflector and PMMA high transparent diffuser.
Gear plate: Galvanized steel plate, special screw fastening.
Finishing: Surface anti-aging electrostatic spray processing, super resistance to corrosion.
Assembling height: 4-6m.
Fixing: Top fitting Ø60mm / Ø76mm.



Green Energy Worldwide Technology Co.,LTD


www.green-energy-worldwide-technology.com

AT-1048



Description

Body: Galvanized steel plate after jointing welding.
Optical system: Anodized aluminum reflector and PMMA high transparent diffuser.
Gear plate: Galvanized steel plate, special screw fastening.
Finishing: Surface anti-aging electrostatic spray processing, super resistance to corrosion.
Assembling height: 4-6m.
Fixing: Top fitting Ø60mm / Ø76mm.


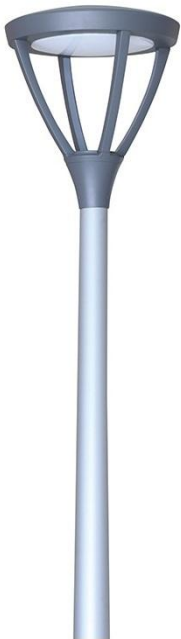


Green Energy Worldwide Technology Co.,LTD

www.green-energy-worldwide-technology.com



Optical Application





Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1047 (30)	30W	100-277	9.4	10.6	400 * 400 * 500
AT-1047 (40)	40W	100-277			
AT-1047 (60)	60W	100-277			
AT-1047 (80)	80W	100-277			



Optical Application

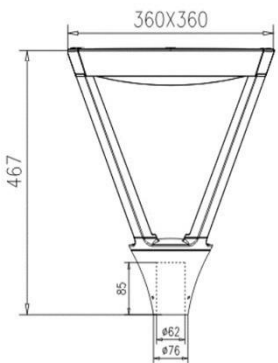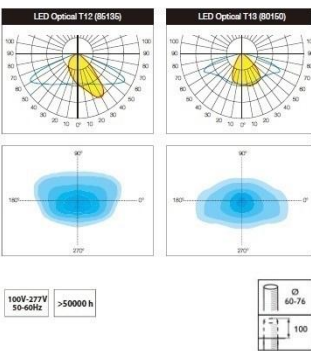

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1048 (30)	30W	100-277	9.4	10.6	400 * 400 * 500
AT-1048 (40)	40W	100-277			
AT-1048 (60)	60W	100-277			
AT-1048 (80)	80W	100-277			