

PET STRAP

PET Strap is an ideal packaging solution for the most varied sectors in industry and craft fields. If necessary, the product can reach high levels of break strength, thus always guaranteeing the utmost reliability.


PET Strap is often used where formerly steel strap was applied, due to its high tensile and tear resistance.



HAND/MACHINE GRADE POLYESTER – NON LUBRICATED

Product Code	Product Finish	Color	Core Size	Width		Thickness		Break Strength N
				Inch	mm	Inch	mm	
HJW0906	Smooth/Emboss	Green/Black	16x6	0.35	9	0.024	0.6	2160
HJW1205	Smooth/Emboss	Green/Black	16x6	1/2	12	0.020	0.5	2400
HJW1206	Smooth/Emboss	Green/Black	16x6	1/2	12	0.024	0.6	2880
HJW1606	Smooth/Emboss	Green/Black	16x6	5/8	16	0.024	0.6	3840
HJW1608	Smooth/Emboss	Green/Black	16x6	5/8	16	0.031	0.8	5120
AAR1609	Smooth/Emboss	Green	16x6	5/8	16	0.035	0.9	6190
AAR1610	Smooth/Emboss	Green	16x6	5/8	16	0.040	1.0	6880
HJW1908	Smooth/Emboss	Green/Black	16x6	3/4	19	0.031	0.8	6080
HJW1910	Smooth/Emboss	Green/Black	16x6	3/4	19	0.040	1.0	7600
HJW1913	Smooth/Emboss	Green/Black	16x6	3/4	19	0.050	1.3	9652
HJW2510	Smooth/Emboss	Green/Black	16x6	1	25	0.040	1.0	10000
HJW2512	Smooth/Emboss	Green/Black	16x6	1	25	0.047	1.2	12000

ADVANTAGE OF PET STRAP



PP STRAP

PP strap is currently the most commonly used straps and is used in a wide range of industries. It was specially designed for light to medium heavy loads and has an excellent performance under normal conditions, because properties such as breaking strength, elasticity and tension loss are sufficient for many applications. It is available in different width, thickness, and color and can be easily printed with, for example, warnings, quality marks or marketing messages.



HAND/MACHINE GRADE POLYPROPYLENE

Product Code	Product Finish	Color	Core Size	Width		Thickness		Break Strength N
				Inch	mm	Inch	mm	
MJP0505	Emboss	Clear/White/Yellow/Black	8x8	3/16	5	0.020	0.5	500
MJP0906	Emboss	Clear/White/Yellow/Black	8x8	3/8	9	0.024	0.6	100
MJP1206	Emboss	Clear/White/Yellow/Black	8x8	1/2	12	0.024	0.6	120
HJP1606	Emboss	Clear/White/Yellow/Black	8x8	5/8	16	0.024	0.6	160

CORD STRAP

Cord strapping is used as a safe, inexpensive product for bundling and securing a wide variety of items across a multitude of industries. From agriculture, nursery, landscaping, automotive, printing, light building products, to baling corrugated and plastic for recycling, bonded cord strapping is your best solution.



REGULAR DUTY CORD STRAP

Product Code	Color	Nominal Length		Nominal Width		Nominal Break daN
		m	Footage	Inch	mm	
JWC1330	White	1100	3608	1/2	13mm	300
JWC1655	White	600	1968	5/8	16mm	550
JWC1962	White	500	1640	3/4	19mm	625
JWC2592	White	450	1476	1	25mm	925
JWC3215	White	300	984	1 1/4	32mm	1500

STRETCH FILM

Stretch film is a stretchable plastic film that is wrapped around items and pallets. Its elastic properties keep items tightly bound together for packaging, shipping, and storage.



HAND/MACHINE GRADE STRETCH FILM

Type	Thickness mic	Width mm Inch	Net Weight kg/roll	Paper Core Diameter mm Inch	Packing roll/box	Elongation
Machine Grade	15	500 20	15	76 3	1	100-400%
	17	500 20	15	76 3	1	100-400%
	20	500 20	15	76 3	1	100-400%
	23	500 20	15	76 3	1	100-400%
	25	500 20	15	76 3	1	100-400%
	28	500 20	15	76 3	1	100-400%
	30	500 20	15	76 3	1	100-400%
Hand Grade	12	450/500 18/20	2.5-5	50/76 2/3	6/4	100-400%
	15	450/500 18/20	2.5-5	50/76 2/3	6/4	100-400%
	17	450/500 18/20	2.5-5	50/76 2/3	6/4	100-400%
	20	450/500 18/20	2.5-5	50/76 2/3	6/4	100-400%
	25	450/500 18/20	2.5-5	50/76 2/3	6/4	100-400%
	25	450/500 18/20	2.5-5	50/76 2/3	6/4	100-400%

PLASTIC CORNER

A simple reusable solution designed to withstand maximum strap tension, these plastic edge protectors are durable and excellent for stabilizing loads.

Protect packaged products from damage, by preventing the strapping cutting into the edges, available in a variety of sizes, suitable for use with plastic and steel strapping.



Product Code	Width	Thickness	Length	Color	Strap Width
19T25	26mm	2.5mm	38mm	Black	15-19mm
19T22	26mm	2.2mm	38mm	Black	15-19mm
19T15	26mm	1.5mm	38mm	Black	15-19mm
32T25	43mm	2.5mm	56mm	Black	15-32mm

STRAPPING BUCKLE

Seals and buckles add a strong secure seal to strapping and prevent contents from moving during transit or storage. For corded polyester strapping, choose sturdy steel buckles that make it easy to tension and re-tension your strapping as goods settle. For a secure fastening on polypropylene strapping, choose plastic buckles that lock the strapping into place, or heavy duty metal seals.

SERRATED SEAL/DIMPLE SEAL

Type	Product Code	Width inch mm	Thickness inch mm	Length inch mm	Weight g/pcs
Serrated Seal	SS1306	1/2 13	0.023 0.6	1.18 30	4.7
	SS1606	5/8 16	0.023 0.6	1.18 30	5.7
	SS1608	5/8 16	0.031 0.8	1.18 30	7.5
	SS1610	5/8 16	0.040 1.0	1.18 30	9.3
	SS1908	3/4 19	0.031 0.8	1.18 30	8.7
Dimple Seal	DS1305	1/2 13	0.020 0.5	1.18 30	4.0
	DS1306	1/2 13	0.023 0.6	1.18 30	4.7
	DS1605	5/8 16	0.020 0.5	1.18 30	4.6
	DS1606	5/8 16	0.023 0.6	1.18 30	5.7



WIRE BUCKLE

Product Code	Finished	Width inch mm	Diameter mm	Packing pcs/ctn	Weight kg/ctn
1333	Galvanized/Phosphate	1/2 13	0.33	1000	9.4
1635	Galvanized/Phosphate	5/8 16	0.35	1000	12.5
1940	Galvanized/Phosphate	3/4 19	0.40	1000	19.7
2550	Galvanized/Phosphate	1 25	0.50	500	19.3
2560	Galvanized/Phosphate	1 25	0.60	500	27.8
3270	Galvanized/Phosphate	1 1/4 32	0.70	250	21.8
3870	Galvanized/Phosphate	1 1/2 38	0.70	250	23.6



STRAPPING TENSIONER

Plastic Manual Strapping Tool provides the simplest method for tightening and sealing plastic strapping around a load or package. Starting with the hand pull tensioner and sealer as our most basic manual device.



Product Code	Color	Applicable Strap	Strap Thickness mm	Strap Width mm	Dimensions L * W * H mm	Weight KGS
JWH33	Red/Blue/Green	PP/PET Strap	0.4-1.0	13-19	270 * 16 * 65	1.5
JWZ33	Blue	PP/PET Strap	0.4-1.0	13-19	260 * 150 * 65	1.5
JWZ35	Blue	PP/PET Strap	0.4-1.0	13-19	260 * 150 * 65	1.5
JWZ19	Blue	Cord/Woven Strap	0.4-1.0	13-19	270 * 165 * 65	1.5
JWZ25	Blue	Cord/Woven Strap	0.4-1.0	13-25	300 * 165 * 85	2.0
JWZ50	Blue	Cord/Woven Strap	0.4-1.0	13-50	310 * 167 * 105	2.2
JWD25	Red	Cord/Woven Strap	0.4-1.0	10-40	285 * 165 * 95	3.0

STRAPPING SEALER

Product Code	Color	Applicable Strap	Strap Thickness mm	Strap Width mm	Dimensions L * W * H mm	Weight KGS
JWS13	Sliver	PP/PET Strap	0.4-0.8	9-13	270 * 16 * 65	1.5
JWS16	Sliver	PP/PET Strap	0.4-0.8	13-16	260 * 150 * 65	1.5
JWS19	Sliver	PP/PET Strap	0.4-0.8	13-19	260 * 150 * 65	1.5

PNEUMATIC STRAPPING TOOL

Pneumatic Strapping Tool is able to finish the step of tightening and welding in one machine. It is driven by air instead of manual operation. Compare to the manual strapping tool, it dramatically improves the packing efficiency. Now it's widely used in industries like brick, glass, paper, aluminum ingot, metal tube, etc.



Model No.	Applicable Strap	Closure Type	Strap Width mm	Max Tension N	Air Pressure Mpa	Dimensions L * W * H mm	Weight KGS
XQD-19	PP/PET Strap	Friction Welding	13-19	2780	0.5-0.8	280*160*180	4.2
XQD-25	PP/PET Strap	Friction Welding	13-25	3260	0.5-0.8	280*160*180	4.2
XQD-32	PP/PET Strap	Friction Welding	13-32	6500	0.5-0.8	320*140*137	6.5
XQH-19	PP/PET Strap	Friction Welding	13-19	/	0.5-0.8	150*82*175	3.8
XQH-25	PP/PET Strap	Friction Welding	13-25	/	0.5-0.8	150*82*175	3.8
XQT-19	PP/PET Strap	Friction Welding	13-19	/	0.5-0.8	240*135*108	2.4
JXW-50	Cord/Woven Strap	Wire Buckle	19-50	6800	0.6-0.8	145*153*320	4.7

BATTERY STRAPPING TOOL

Handheld Battery Powered Strapping Tool is suitable for the packing of the steel, timber, brick, fiber for its compact design and light weight that enables portability. It is used for paper industry, aluminum industry, steel industry, wood, wooden packaging, chemical fiber, cotton, tobacco, chemicals, metal industry and so on.



Product Code	Applicable Strap	Strap Width mm	Thickness mm	Max Tension N	Battery	Charge Time minutes	Dimensions L * W * H mm	Weight KGS
JJW-16	PP/PET Strap	13-16	0.5-1.2	2800	6AH,14.4V	30	370*140*120	3.4
JDC13/16	PP/PET Strap	13-16	0.5-1.2	2800	6AH,11.1V	90	340*140*120	3.4
WDD-160	PP/PET Strap	13-16	0.5-1.2	3000	2.4AH,12V	60	370*140*130	3.9
WDD-190	PP/PET Strap	13-19	0.5-1.2	3000	2.4AH,12V	60	370*140*130	4.0

PALLET STRAPPER


Equipped with externally adjustable track feed, perfect for securing outgoing pallets of any size. The pallet strapping machine performs the strapping function from one position as you operate the controls, therefore eliminating the need for bending over to feed the strap around the pallet manually.



Product Code	JW-008
Dimension	L=950mm W=750mm H=1250mm
Weight	100kg (incl. battery)
Length ChainLance	700cm
Pallet Size	Max. Height: 3000mm Max. Width: 2000mm
Strap Size	Width: 12-19mm Thickness: 0.6-1.3mm
Minimum Clearance Size	Height: 75m Width: 200mm
Strap Speed	Horizontal: 40m/min Vertical: 60m/min
Charger	DC23.6-DC33.6V
Charging Time	app. 2.5h can strap 600 loops

MANUAL STRAPPING TOOL

Manual Steel Strapping Tools are the simplest and most basic method of tensioning, sealing and cutting steel strapping. We offers a variety of manual tools to suit your budget and needs. Depending upon your application one can either invest in a three tool system (tensioner, sealer and cutter) or a combination sealless tool that will perform all three operations without the cost of seals.

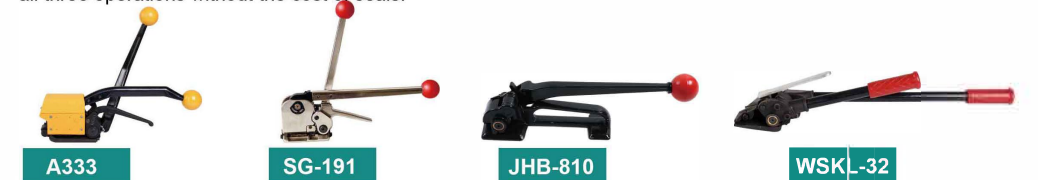

Product Code	Closure Type	Strap Width mm	Strap Thickness mm	Weight KGS	Dimension mm
A333	Buckle Free	13-19	0.38-0.64	3.9	387 * 168 * 308
SG-191	Buckle Free	13-19	0.38-0.80	3.5	390 * 95 * 330
JHB-810	Buckle	13-19	0.3-0.80	2.2	360 * 107 * 87
WSKL-32	Buckle	13-32	0.8-1.20	3.5	620 * 255 * 60
JHC	Buckle	13-19	0.3-0.80	1.0	330 * 155 * 50
WSKS-32	Buckle	9-32	0.8-1.20	3.5	650 * 100 * 180



PNEUMATIC STRAPPING TOOL



Product Code	Applicable Strap	Closure Type	Strap Width	Strap Thickness	Max Tension	Air Pressure	Weight
KCL-32	Steel Strap	Buckle	19-32mm	0.8-1.2mm	≥9.8KN	0.4-0.6Mpa	4.8KGS
KCS-32	Steel Strap	Buckle	19-32mm	0.8-1.2mm	≥16.8KN	0.4-0.6Mpa	3.5KGS
KZ-32B	Steel Strap	Buckle	19-32mm	0.8-1.2mm	≥9.8KN	0.4-0.6Mpa	15.5KGS
GZD-19B	Steel Strap	Buckle	16-19mm	0.38-1.2mm	≥4.0KN	0.4-0.6Mpa	5.0KGS

STRAPPING DISPENSER



Product Code	Applicable Strap	Cord Size	Wheel Size	Dimension	Weight	Type
JW-200	PP/Cord/Woven Strap	200mm	8" Rubber	700 * 350 * 740mm	18 KGS	Whole Type
JW-201	PP/Cord/Woven Strap	200mm	8" Rubber	700 * 350 * 740mm	18 KGS	Split Type
JW-400	PP/PET Strap	406mm	8" Rubber	650 * 320 * 1050mm	25 KGS	Whole Type
JW-402	PP/PET Strap	406mm	8" Rubber	650 * 320 * 1050mm	25 KGS	Split Type
JW-4020	PP/PET/Steel Strap	200/406mm	10" Rubber	665 * 450 * 1070mm	25 KGS	Whole Type
JW-403	Steel Strap	200/406mm	8" Rubber	700 * 400 * 1050mm	15 KGS	Whole Type

FILM DISPENSER



Product Code	Paper Core Length	Paper Core Inner Dia.	Dimension	Weight	Packing
JW620	12"-20"	2"	680 * 305 * 120mm	1.45 KGS	1 pcs/ctn
JB621	12"-20"	2"	690 * 260 * 90mm	1.40 KGS	1 pcs/ctn
SFD01	5"	/	190 * 76mm	0.10KGS	110 pcs/ctn
JWH1	18"	1.5"	300 * 130 * 590mm	1.68KGS	1 pcs/ctn
JWH2	20.5"	2"	300 * 130 * 632mm	1.80KGS	1 pcs/ctn
JWH3	20.5"	3"	300 * 130 * 632mm	2.10KGS	1 pcs/ctn

PP STRAPPING MACHINE

We offer a full range of fully automatic and semi automatic strapping machines that utilize our polypropylene strapping. Semi automatic strapping machines are the most economical choice; a great addition to any mail room. The automatic arch machines are extremely reliable and also come in side seal, dual press, small package, and stainless steel configurations. Lastly, our fully automatic arch strappers are for in-line use and require no operator.



SEMI AUTOMATIC STRAPPING MACHINE

Product Code	Strap Width	Power Supply	Power Consumption	Machine Tension	Dimension	Weight
A-66	5-15.5mm	180-240V, 50-60HZ	0.30KW	100-500N	900 * 595 * 760mm	60KGS
A-66L	5-15.5mm	180-240V, 50-60HZ	0.30KW	100-500N	900 * 595 * 490mm	60KGS
JW-8020	9-15.0mm	100-240V, 50/60HZ	0.65KW	50-600N	895 * 565 * 735mm	90KGS
JW-8022	9-15.0mm	100-240V, 50/60HZ	0.65KW	50-600N	895 * 565 * 735mm	90KGS



FULLY AUTOMATIC STRAPPING MACHINE

Product Code	Strap Width	Power Supply	Strap Speed	Machine Tension	Dimension	Weight
JW-101	9-15mm	100-240V, 50/60HZ	26-29 Strap/min	100-700N	1380 * 620 * 1418mm	230 KGS
JW-102	9-15mm	100-240V, 50/60HZ	26-29 Strap/min	100-700N	1450 * 640 * 1500mm	230 KGS
A66 PLUS	9-12mm	100-240V, 50/60HZ	40 Strap/min	10-400N	1350 * 620 * 1415mm	150 KGS