

# Product data sheet

Specifications



## power supply module Modicon Quantum - 24 V DC 20..30 V - standalone

140CPS21100C

! Discontinued on: 31 December 2021

! To be end-of-service on: 31 December 2029

! Discontinued - Service only

### Main

Range of product	Modicon Quantum automation platform
Product or component type	Power supply module
Power supply type	Standalone

### Complementary

Input voltage	24 V (20...30 V) DC
Input current	1600 mA
Inrush current	30 A
Maximum input power interruption	1 ms 20 V 20 ms 25 V
Associated fuse rating	2.5 A, slow-blow
Output voltage	5.1 V DC
Power supply output current	0.3...3 A standalone
Output overvoltage protection	Internal
Output overload protection	Internal
Power dissipation	2 + (3 x Iout) where Iout is in A
Local signalling	1 LED (green) for power (PWR OK)
Marking	CE
Module format	Standard
Net weight	0.65 kg

### Environment

Protective treatment	Conformal coating Humiseal 1A33
Standards	CSA C22.2 No 142 UL 508
Product certifications	FM Class 1 Division 2 cUL
Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...2000 MHz conforming to IEC 801-3

Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	16.3 cm
Package 1 Width	4.5 cm
Package 1 Length	31.2 cm
Package 1 Weight	740.0 g
Unit Type of Package 2	S02
Number of Units in Package 2	2
Package 2 Height	15.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	1.906 kg

### Offer Sustainability


EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>

### Contractual warranty

Warranty	18 months
----------	-----------


Racks for Modules Mounting

Dimensions of Modules and Racks

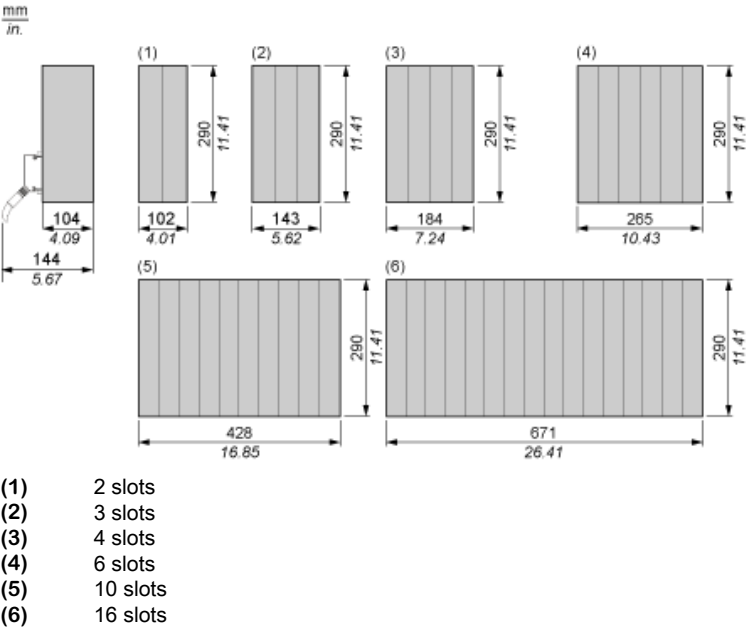

24 Vdc/3 A Power Supply Module

Wiring Diagram

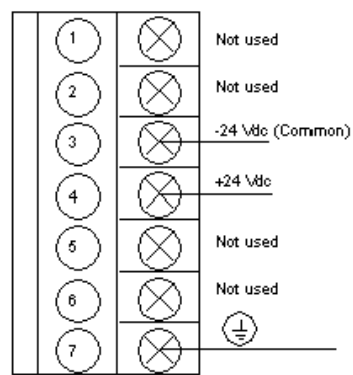

Recommended replacement(s)

140CPS21100C is replaced by:

1x



power supply module X80 - 24..48 V isolated DC - for severe environments  
BMXCPS3020H