

KOL-407A



KOL-407B




KOL-407C



KOL-407D



Anti-glare accessory



Honeycomb

Specification 产品参数


Item No. 产品型号	KOL-407A	KOL-407B	KOL-407C	KOL-407D
LED Brand/LED品牌	OSRAM / Bridgelux / CREE			
LED Q' ty/LED颗数	15Pcs	18Pcs	24Pcs	36Pcs
Rated Power/额定功率	15W	18W	24W	36W
Input Volt/输入电压	DC 24V / AC 100-265V			
Color/颜色	1800K-6500K, R, G, B, Y, RGB, RGBW			
Beam Angle/发光角度	7°, 10°, 15°, 25°, 30°, 45°, 60°, 90°			
Control Way/控制方式	On-Off / DMX512 通电即亮/DMX512			
LED Life/LED寿命	50000h			
IP Rating/防水等级	IP 67			
Load Capacity/承重	IK 10, Max 2000Kg load			
Enclosure Material/外壳材质	Die-cast aluminum+Stainless steel trim 压铸铝灯体+不锈钢面盖			
Size/尺寸	D210*H95	D230*H95	D250*H95	D310*H95
Lumen/流明	85lm/W			
Cutout/开孔直径	185mm	205mm	235mm	290mm
Honeycomb/蜂窝网	Option			






Specification 产品参数

Item No. 产品型号	KOL-C5100 KOL-C7130 KOL-C9150 KOL-C10160 KOL-C15180				
LED Brand/LED品牌	Bridgelux/Cree COB				
Rated Power/额定功率	5W	7W	9W	10W	15W
Lumen/流明	90lm/W output				
Input Volt/输入电压	DC 24V / AC 100-265V				
Color/颜色	2700K, 3000K, 4000K, 5000K, 6000K				
Beam Angle/发光角度	24°, 42°				
Control Way/控制方式	On-Off				
LED Life/LED寿命	50000h				
IP Rating/防水等级	IP 67				
Load capacity/承重	IK 10, Max 2000Kg load				
Enclosure Material/外壳材质	Die-cast Aluminum+Stainless steel trim 压铸铝灯体+不锈钢面盖				
Size/尺寸	D100*H80	D130*H95	D150*H95	D160*H95	D180*H95
Cutout/开孔	95mm	115mm	125mm	143mm	155mm
Honeycomb/蜂窝网	Option				

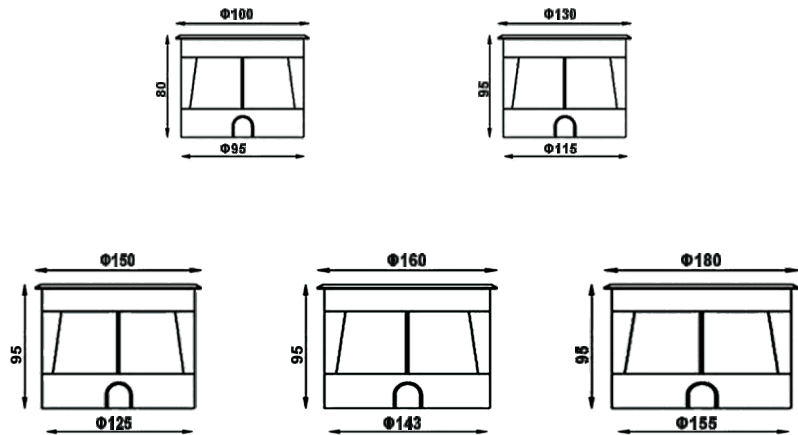





KOL-A130



KOL-A160



KOL-A260



Specification 产品参数

Item No. 产品型号	KOL-A130	KOL-A160	KOL-A260
LED Brand/LED品牌	OSRAM / Bridgelux / CREE		
LED Q'ty/LED颗数	3Pcs	9Pcs	18Pcs
Rated Power/额定功率	3W	9W	18W
Input Volt/输入电压	DC 24V / AC 100-265V		
Color/颜色	1800K-6500K, R, G, B, Y, RGB, RGBW		
Beam Angle/发光角度	7°, 10°, 15°, 25°, 30°, 45°, 60°, 90°		
Control Way/控制方式	On-Off / DMX512 通电即亮/DMX512		
LED Life/LED寿命	50000h		
IP Rating/防水等级	IP 67		
Load Capacity/承重	IK 10, Max 2000Kg load		
Enclosure Material/外壳材质	Die-cast aluminum+Stainless steel trim 压铸铝灯体+不锈钢面盖		
Size/尺寸	D130*H140	D160*H160	D260*H195
Lumen/流明	85lm/W		
Cutout/开孔直径	115mm	145mm	245mm
Honeycomb/蜂窝网	Option		
Angle Adjustable/可调角度	30°		







KOL-AC130



KOL-AC160



Specification 产品参数

Item No. 产品型号	KOL-AC130		KOL-AC160
LED Brand/LED品牌	Bridgelux / CREE		
LED Q' ty/LED颗数	7W		15W
Lumen/流明	90lm/W output		
Input Volt/输入电压	DC 24V / AC 100-265V		
Color/颜色	2700K/3000K/4000K/5000K/6000K		
Beam Angle/发光角度	24°, 42°		
Control Way/控制方式	On-Off 通电即亮		
LED Life/LED寿命	50000h		
IP Rating/防水等级	IP 67		
Load Capacity/承重	IK 10, Max 2000Kg load		
Enclosure Material/外壳材质	Die-cast aluminum+Stainless steel trim 压铸铝灯体+不锈钢面盖		
Size/尺寸	D130*H140		D160*H160
Cutout/开孔直径	115mm		145mm
Honeycomb/蜂窝网	Option		
Angle Adjustable/可调角度	30°		

