

聚氨酯夹纱管

PU Reinforced Tube

产品特性/Product Features:

- 具有极好的柔软性和化学性能、良好的抗震性、质轻、压力损失极小、硬度恒定。
- 工作压力是单层PU气管的1.8倍，使用寿命是单层PU管的二倍以上
- 无毒、无味。
- 可按需定制颜色，易于管路识别。
- 符合ROHS环保要求。
- Excellent flexibility and chemical properties, good earthquake resistance, light weight, minimal pressure loss, constant hardness
- Working pressure is 1.8 times and life is two times than the PU-tube.
- Non-toxic,tasteless.
- Customer-made color is doable for easy pipeline recognition.
- Agree to ROHS environment protection requirement.




聚氨酯夹纱管Y-RPU

产品编码 Code	外径 O. D	内径 I. D	长度 Length	工作压力 Working Pressure	弯曲半径 Bending Radius
	mm	mm	m	Kgf/cm ²	mm
Y-RPU0850	8	5	100	20	20
Y-RPU1065	10	6.5	100	18	25
Y-RPU1280	12	8	100	18	3.5
Y-RPU1410	14	10	100	15	45
Y-RPU1610	16	12	100	15	70


产品用途/Product Use:

- 工业机器人、气动工具、装配厂气压工具、带压输送管道。
- 过水及其它流体。
- 车辆维修及房屋喷漆。
- Industrial robots, pneumatic tools, assembly pneumatic tools, with pressure pipelines.
- Transport water and other fluid.
- Vehicles service and house painting.

技术参数曲线图/ Technical parametersgraph

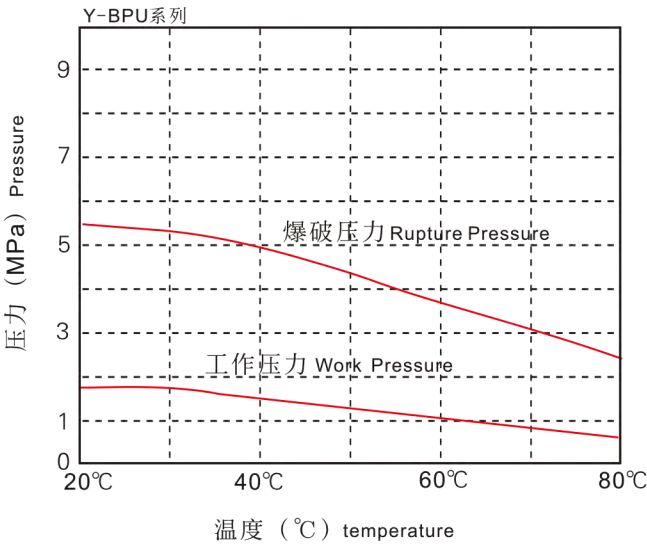

夹纱管结构图/Tube structure of the gripper

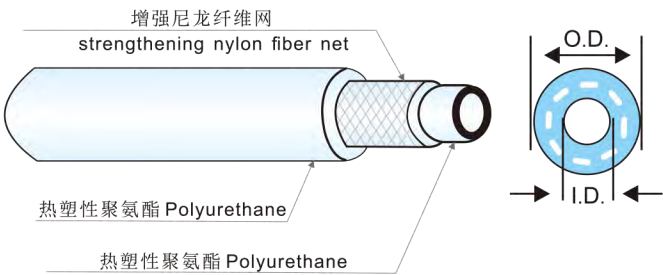

Material 材 质	热塑性聚氨酯 Polyurethane
Application medium 使用介质	空气、水等 Water,air,etc.
Work pressure 工作压力	2MPa
Burst presure 爆破压力	6MPa
Environment temperature 环境温度	-30℃~80℃
Medium temperature 介质温度	-20℃~40℃
Applicable joint 适用接头	快速接头等 Quick joint,etc.
Applicable 适用范围	气动、风动工具 Air/wind driven tool