## 雷达手势感应背光控制

当开关面板处于息屏状态时（背景字熄灭），用户用手掌在面板前挥动，面板即感应到手势，面板背景字就会亮起，当面板在设置的时间内感应不到人体手势，背景字就会自动熄灭。

## LED光圈设计

开关按键状态光圈反馈的人性化设计，当灯光开启时，按键光圈就会点亮为白色，关灯光圈也随之关闭，清楚知道哪个灯开，哪个灯关。

Touch 6018 Rui Shang B series
轻触6018锐尚B系列
远离喧嚣，
触动智能之美，
开启时尚成功之旅！

边框面板一体化

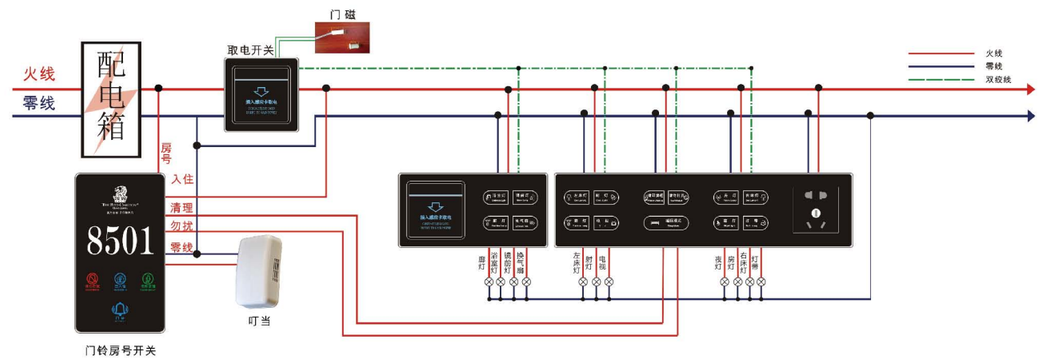

Touch 8010 crystal core series

# 触摸8010晶睿系列

远离噪器，
触动智能之美，
开启时尚成功之旅！

A series of 6009 grain core

# 轻触6009晶睿系列

远离噪器，
触动智能之美，
开启时尚成功之旅！

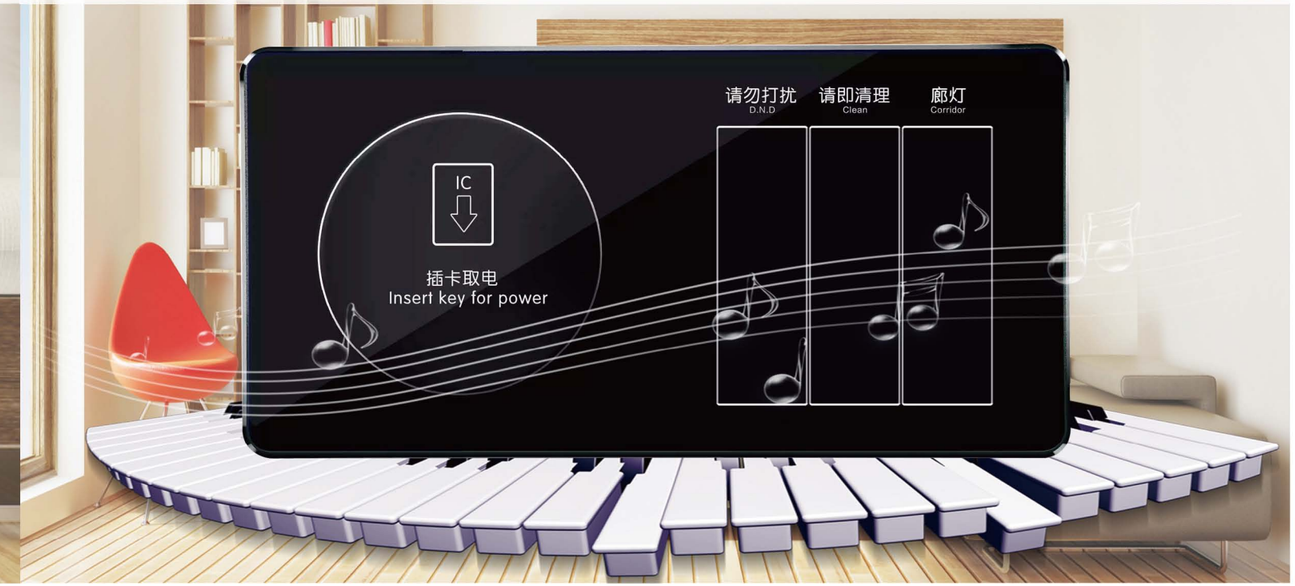




102*102*10 MM

102*188*10MM

102*274*10 MM

## Features

**Humanized two-color backlight design**: the white light circle is on when the light on,yellow backlight when the light off.the light position indication is clear at a glance, which is convenient for identification.

**Convenient and fast installation method**: ultra thin metal frame, integrated base plate and frame, the latest strong magnetic suction installation, simple installation and low labor cost.

## Parameter

Working voltage: AC: 110/220V  DC: 5V/12V/24V
Power consumption: <0.2W
Working temperature: -10 ℃-50 ℃
Working humidity: 0-90%RH
Working life: 100,000 times
Rated power: Resistive load 500W /Gang, inductive load 100W/ Gang

102*102*10mm

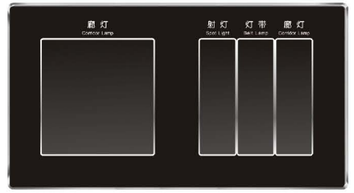

102*188*10mm

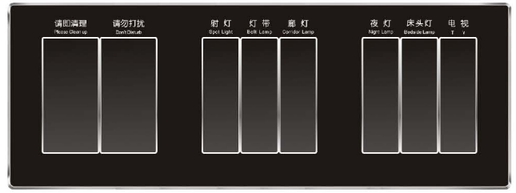

102*274*10mm





## Features

Intelligent mode, no code matching, automatic networking to realize intelligent control, which can be matched with various types of customer control RCU.

Convenient and fast installation method: ultra thin metal frame, integrated base plate and frame, the latest strong magnetic suction installation, simple installation and low labor cost.

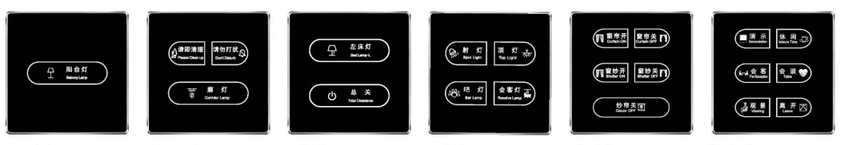

86*86*7mm 86*86*7mm 86*86*7mm 86*86*7mm 86*86*7mm 86*86*7mm

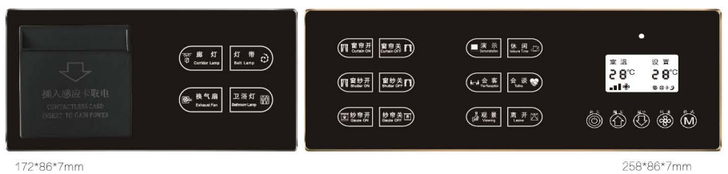

172*86*7mm 258*86*7mm

86*86*7MM 344*86*7MM

## Parameter

Working voltage: AC: 110/220V DC: 5V/12V/24V
Power consumption: <0.2W
Working temperature: -10 ℃-50 ℃
Working humidity: 0-90%RH
Working life: 100,000 times
Rated power: Resistive load 500W /Gang, inductive load 100W/ Gang

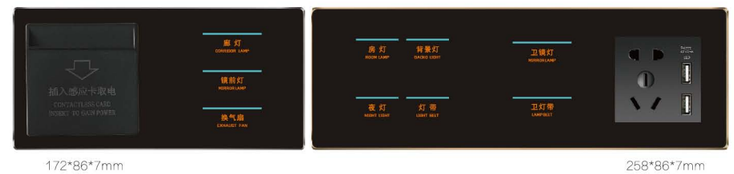

172*86*7mm 258*86*7mm

86*86*7mm 344*86*7mm

A series of 6001

# 轻触6001系列

远离喧嚣，
触动智能之美，
开启时尚成功之旅！

可配面板、边框颜色

## Parameter

Working voltage: AC: 110/220V  DC: 5V/12V/24V
Power consumption: <0.2W
Working temperature: -10 ℃-50 ℃
Working humidity: 0-90%RH
Working life: 100,000 times
Rated power: Resistive load 500W /Gang, inductive load 100W/ Gang

86*86*7mm

172*86*7mm

258*86*7mm

344*86*7mm



SOCKET SWITCH SERIES

# 插座开关系列

远离喧嚣，
触动智能之美，
开启时尚成功之旅！

172*86*7MM

258*86*7MM

344*86*7MM

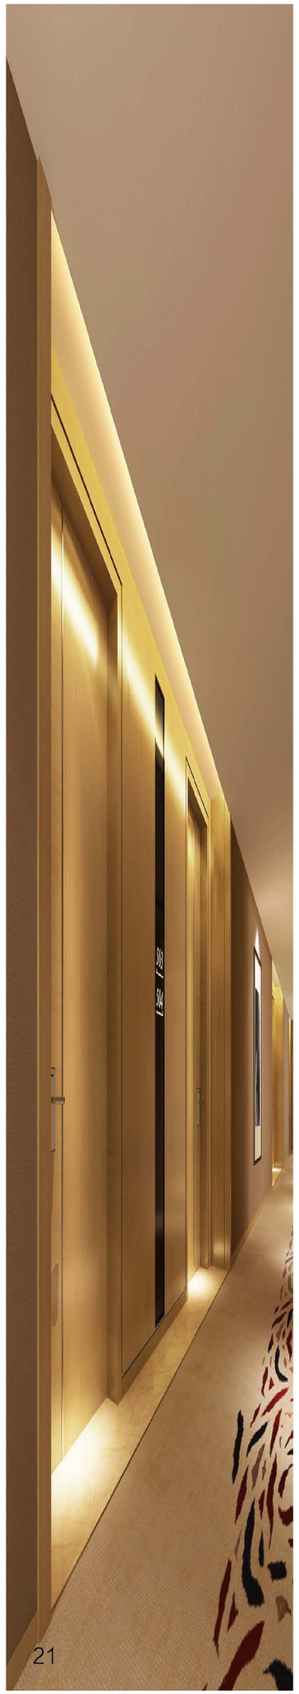

Admission card series

## 插卡取电系列

Temperature control series

## 强弱电温控系列

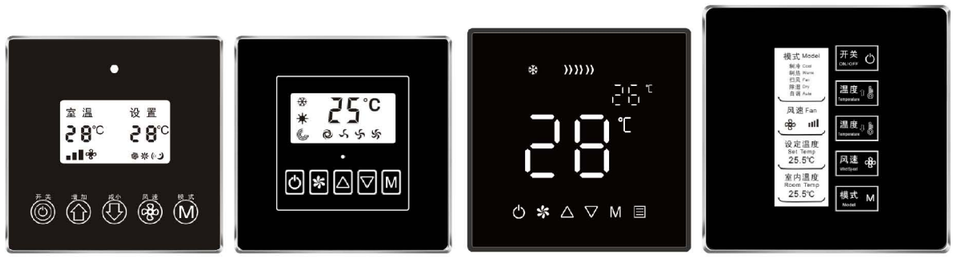


86*86mm 86*86mm 90*90mm 102*102mm

Light modulation / curtain switch series

## 调光/窗帘开关系列

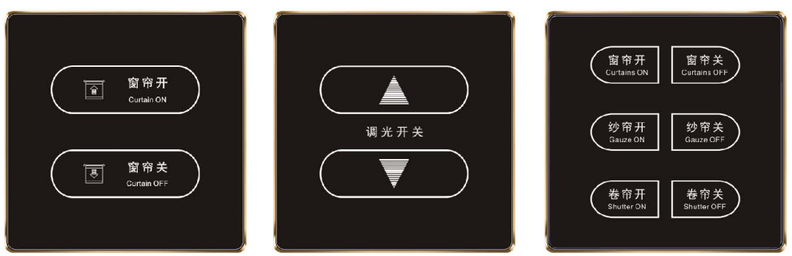


Electronics doorplate series

## 电子门牌系列

120*360*10MM

100*350MM

160*370MM




100*380MM

150*360MM

100+80*400*10MM

100*360MM

180*290MM

120*290*15MM

250*110*35MM

120*400MM

105*606MM

140*250MM

250*500MM

125*400MM

140*350MM

150*350MM

90*140MM

130*130MM

80*250MM

86*286MM

65*290MM

45*300+65*180MM

120*260MM

50*250MM



Electronics doorplate series
电子门牌系列
远离喧嚣，
触动智能之美，
开启时尚成功之旅！

100*300*12mm　120*380*9mm　86*258*7mm　145*240*9mm　130*230*9mm

230*130*9mm

172*86*7mm

86*86*7mm

## Wiring Diagram

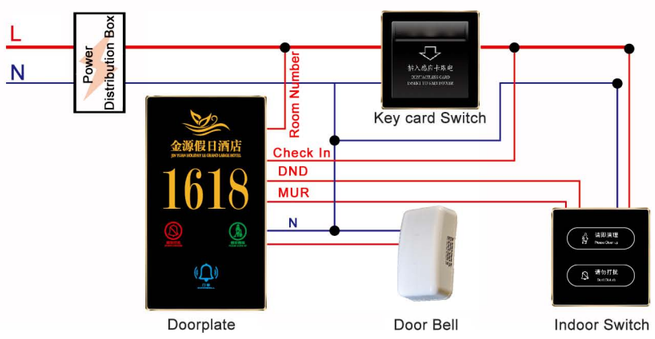

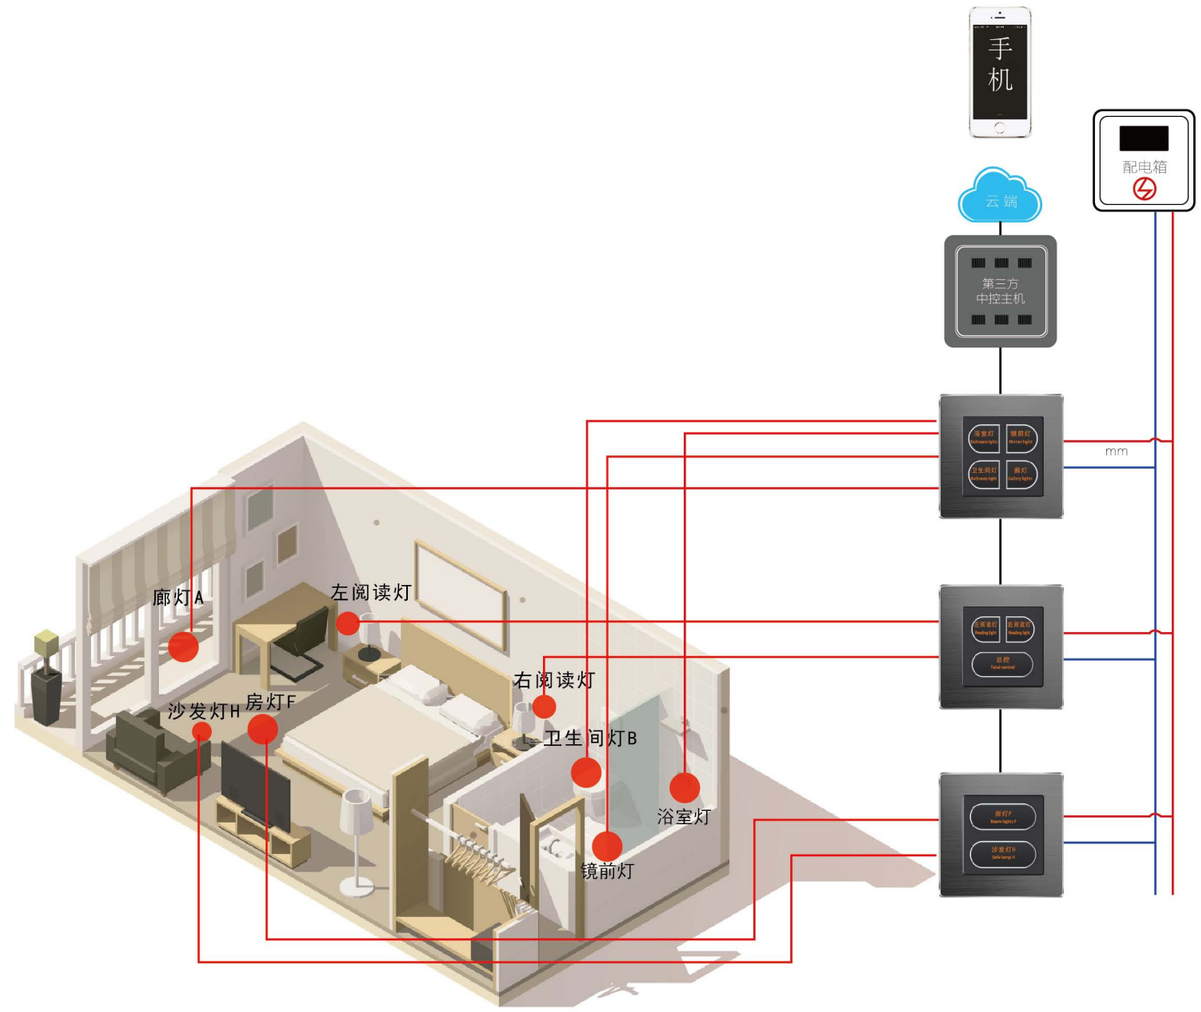
## 220V AC Voltage RS485 Central Control Solution