

CONTENTS

目 录



行业包装方案 Industry Solution	P08-28
开箱机&装箱机 Carton Erector&Carton Loader	P29-35
封箱机 Carton Sealer	P36-47
捆扎机 & 缠绕膜机 Strapping&Wrapping Machine	P48-57
码垛托盘包装 Palletizing	P58-60
收缩机 Shrink Machine	P61-77
真空机 Vacuum Machine	P78-86
封口机 Band Sealing Machine	P87-92
灌装 & 封口机 Filling&Sealing Machine	P93-98
自动立式 & 枕式包装机 Automatic Vertical & Horizontal Packing Machine	P99-107
印码机&贴标机 Printing&Labeling Machine	P108-115
工具&包装材料 Tool&Material	P116-118

Industry Solution

行业包装方案

INDUSTRY SOLUTION
INDUSTRY SOLUTION
INDUSTRY SOLUTION
INDUSTRY SOLUTION
INDUSTRY SOLUTION
INDUSTRY SOLUTION
INDUSTRY SOLUTION
INDUSTRY SOLUTION



袋状产品蜘蛛手机器人装箱、机器人码垛生产线

Bag product delta robotic and robotic palletizing production line



生产线设计产能/Production line designed ability : 每分钟 100~300包 (可根据客户的实际需求产量定制)


生产线设备组成/Production line machine combination : 上料提升机、立式包装机、金检机、选别称、开箱机、蜘蛛手装箱机、称重剔除机、封箱机、打包机、定位抓取线、共栈机、机器人码垛机、栈板输送机

生产线使用产品/Production applied product :

配多头组合秤：饼干、糖果、薯片、膨化食品、花生、瓜子、兰花豆、坚果、红枣、葡萄干、牛肉粒、锅巴、汤圆、水饺、杂粮、茶叶、干货、种子、塑料粒子等颗粒物料

配螺杆充填头：奶粉、豆奶粉、芝麻糊、咖啡、麦片、面粉、调味品、洗衣粉等粉剂物料

配量杯下料头：白糖、食盐、味精、调味品等细小颗粒物

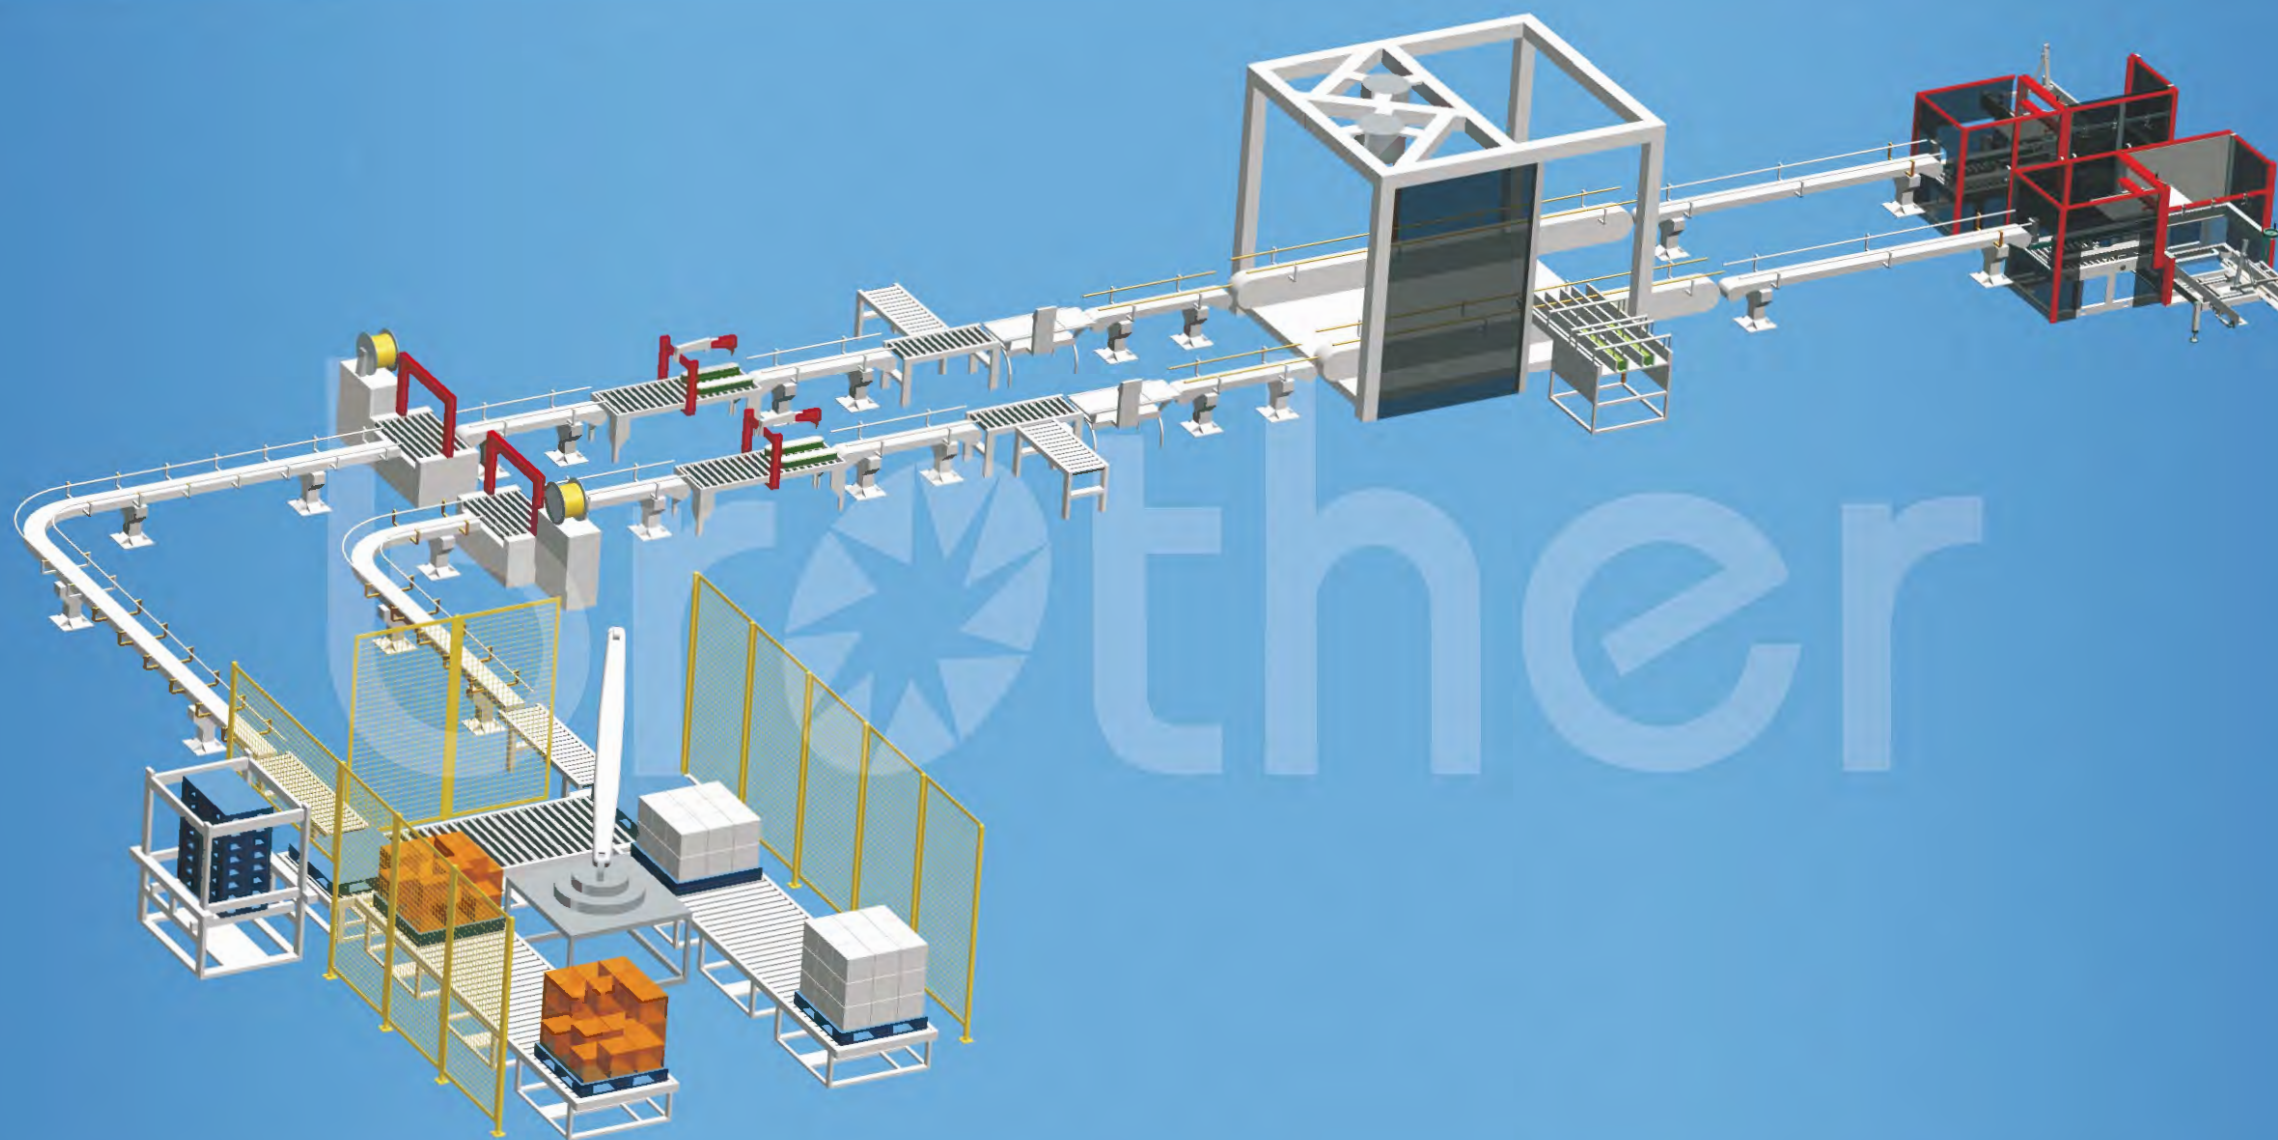

本生产线专门与给袋式包装机对接，满足后段包装全自动化生产需求

★ 提高生产效率 ★ 降低生产成本 ★ 提升产品质量 ★ 减少人员流动

This production line combined with vertical machine, satisfied with packing production line

★ Improving production effective★ Reduce production cost★ Improving product quality



袋状产品伺服装箱、伺服码垛生产线

Bag product servo case loading and palletizing production line



生产线设计产能/Production line designed ability : 每分钟 100~500 包 (可根据客户的实际需求产量定制)

生产线设备组成/Production line machine combination : 枕式包装机、金检机、选别称、并道柔性输送线、开箱机、伺服装箱机、称重剔除机、封箱机、打包机、定位输送线、共栈机、栈板机、伺服码垛机、栈板输送机

生产线使用产品/Production applied product : 饼干、糕点、面包、蛋黄派、雪饼、月饼、挂面、方便面、汤圆、水饺、粉丝、火锅底料、火腿肠、巧克力、雪糕、肥皂、湿纸巾、输液袋等软袋产品



本生产线专门与枕式包装机对接，满足后段包装全自动化生产需求
★ 提高生产效率 ★ 降低生产成本 ★ 提升产品质量 ★ 减少人员流动

This production line combined with pillow machine , satisfied with pecking production line
★ Improving production effective★ Reduce production cost★ Improving product quality



袋状产品机器人装箱、机器人码垛生产线

Bag product robotic loading and palletizing production line



生产线设计产能/Production line designed ability : 每分钟100——500包 (可根据客户实际需求产
生产线设备组成/Production line machine combination : 分流输送线、枕式包装机、并道柔性输
生产线适用产品/Production applied product : 饼干、糕点、面包、蛋黄派、雪饼、月饼、挂面、

量定制)

送线、高速开箱机、机械手装箱机、封箱机、满箱定位抓取线、供栈机、机器人码垛机、栈板输送机
方便面、汤圆、水饺、粉丝、火锅底料、火腿肠、巧克力、雪糕、肥皂、湿纸巾、输液袋等软袋产品



本生产线专门与枕式包装机对接，满足后段包装全自动化生产需求
★ 提高生产效率 ★ 降低生产成本 ★ 提升产品质量 ★ 减少人员流动

This production line combined with pillow machine , satisfied with packing production line
★ Improving production effective★ Reduce production cost★ Improving product quality



瓶装产品全自动装箱、机器人码垛生产线

Bottle product automatic case loading and robotic palletizing production line




生产线设计产能/Production line designed ability : 每小时5000——30000瓶 (可根据客户实际需求产量定制)

生产线设备组成/Production line machine combination : 灌装机、旋盖机、贴标机、分道输送线、开箱机、抓取式装箱机、落差式装箱机、称重剔除机、封箱机、打包机、定位输送线、供栈机、机器人码垛机

生产线适用产品/Production applied product :

日用化工类: 洗发水、洗洁精、洗手液、润肤露、洗面奶、防晒霜、沐浴露、消毒液、清洗液、 润滑油、刹车油、玻璃水等瓶装产品
油脂食品类: 食用油、香油、橄榄油、蜂蜜、营养液、口服液、苹果醋、果粒橙、酸奶、调味料、酱油、食醋、料酒、糖浆等瓶装产品

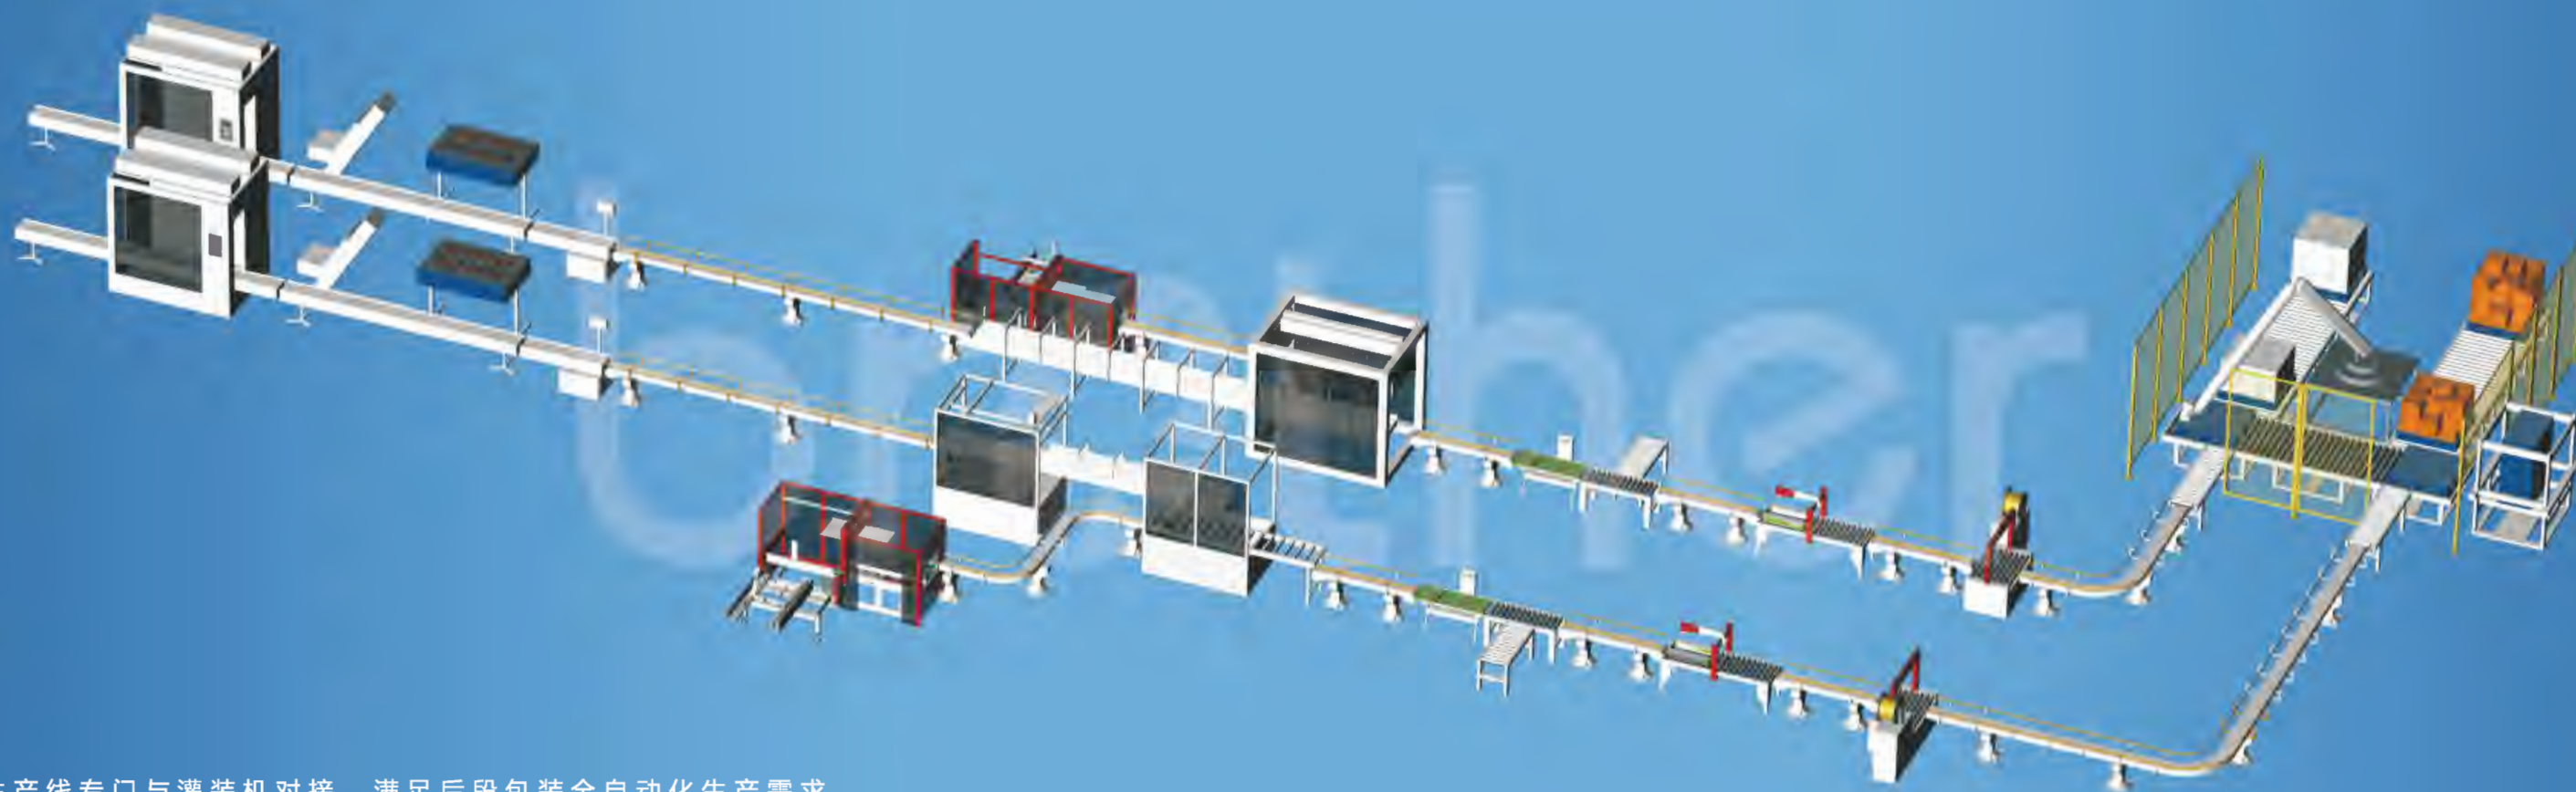

本生产线专门与灌装机对接，满足后段包装全自动化生产需求

★ 提高生产效率 ★ 降低生产成本 ★ 提升产品质量 ★ 减少人员流动

This production line combined with filling machine , satisfied with packing production line

★ Improving production effective★ Reduce production cost★ Improving product quality



盒装产品全自动装箱、伺服码垛生产线
Box type product case loading and palletizing production line





生产线设计产能/Production line designed ability : 每分钟60——300盒 (可根据客户实际需求产量定制)
生产线设备组成/Production line machine combination : 装盒机、金检机、选别称、开箱机、伺服装箱机、侧推式 装箱机、称重剔除机、封箱机、打包机、定位输送线、伺服码垛机
生产线适用产品/Production applied product : 各种纸盒包装、塑料盒包装、铁盒包装等盒装产品及块状产品




本生产线专门与装盒包装机对接，满足后段包装全自动化生产需求
★ 提高生产效率 ★ 降低生产成本 ★ 提升产品质量 ★ 减少人员流动
This production line combined with box filling machine , satisfied with packing production line
★ Improving production effective★ Reduce production cost★ Improving product quality



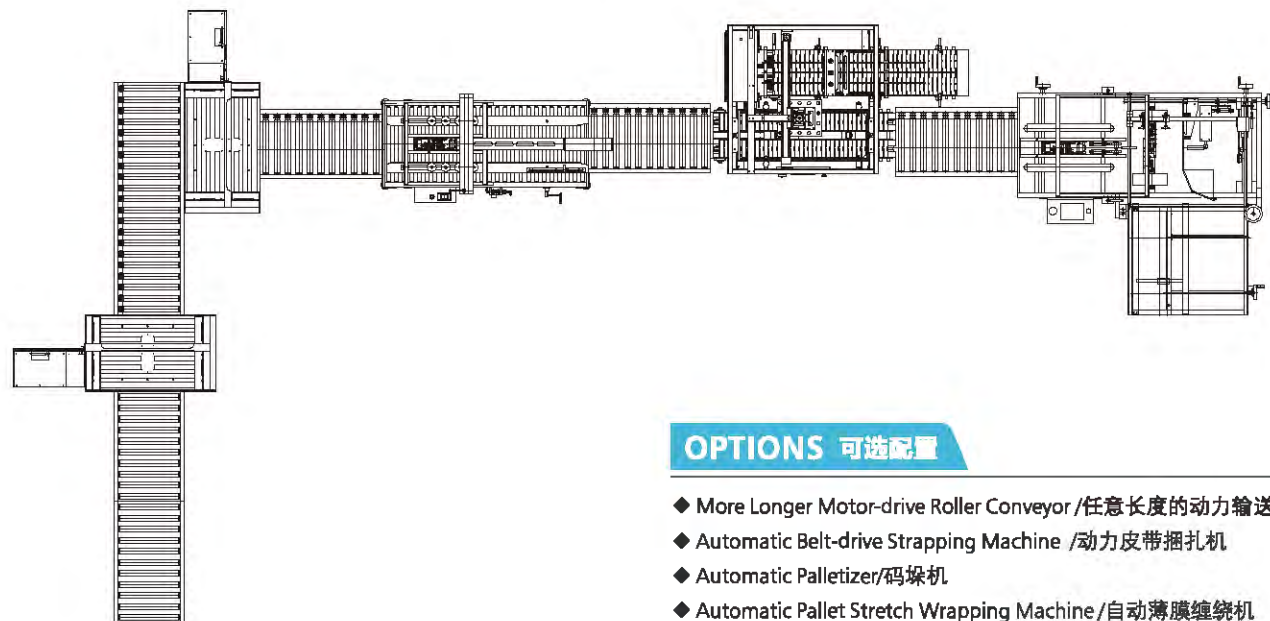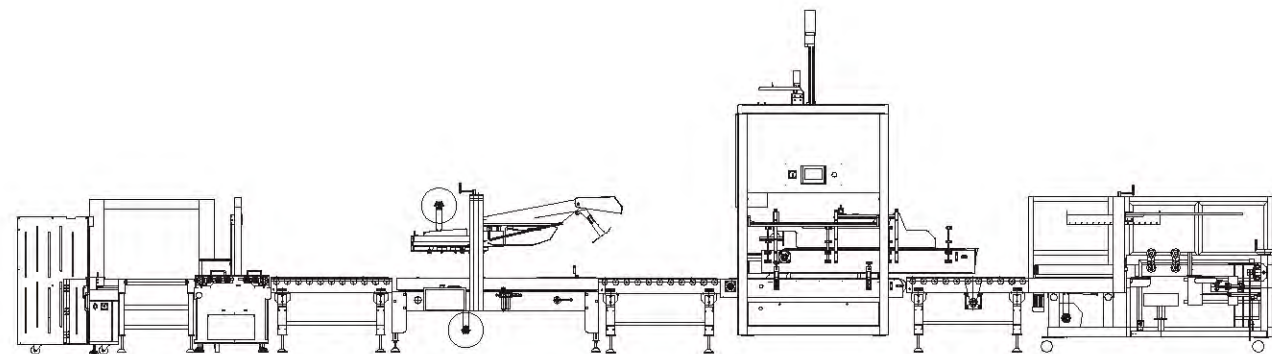

OPTIONS 可选配置

- ◆ More Longer Motor-drive Roller Conveyor /任意长度的动力输送机
- ◆ Automatic Belt-drive Strapping Machine /动力皮带捆扎机
- ◆ Automatic Palletizer/码垛机
- ◆ Automatic Pallet Stretch Wrapping Machine/自动薄膜缠绕机

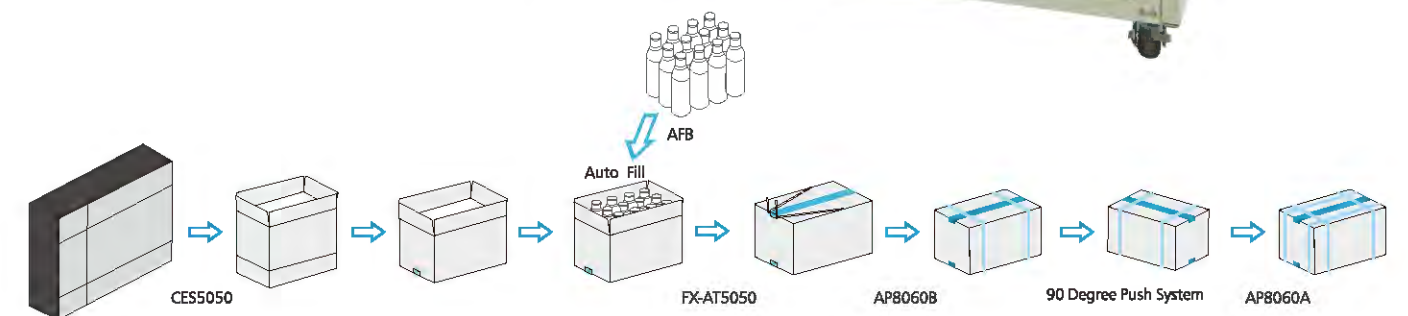

FEATURES 特性

The system consists of carton erector & bottom sealer, automatic carton sealer, automatic strapping machine, 90 degree push conveyor and conveying frame, which has the function of continuous automatic carton open-bottom seal-fill-uppen seal and multi-belt strapping, and it not only takes up less room but also reduces the packing cost as well. It is full automatic control and reliable working, convenient operation and simple maintenance while, all machine can be used separately.


本套包装系统由自动开箱封底机，动力输送台，自动装箱机，自动折盖封箱机，全自动捆扎机，90度转角推料输送台和输送架组成；具有连续自动开箱-封底-装箱-封盖及多道捆扎包装的功能，既提高了包装的美观性，又降低包装成本。为全自动无人控制，工作可靠。操作方便，保养简单。所有机器也可分别单独使用。

CONFIGURATION 配置

- ◆ CES4035N Carton Erector & Bottom Sealer/自动开箱封底机 1unit
- ◆ RCM/D Motor-drive Roller Conveyor/动力滚筒输送机 1unit
- ◆ AFB Automatic Carton Filler /自动装箱机
- ◆ FX-AT5050 Automatic Top Flap Carton Sealer /自动折盖封箱机 1unit
- ◆ AP8060B Automatic Strapping Machine With Belt-drive /全自动皮带输送捆扎机 1unit
- ◆ RC1M/V 90 Degree Push Conveyor/90度转角推料输送台 1unit
- ◆ RC1M/D Belt-drive Roller Conveyor/皮带动力输送台 1unit
- ◆ AP8060C Automatic Strapping Machine/全自动捆扎机 1unit
- ◆ RC2M Non-drive Roller Conveyor/无动力滚筒输送台

APL-CSS02

Automatic Carton Packing Line
纸箱封箱捆扎包装线

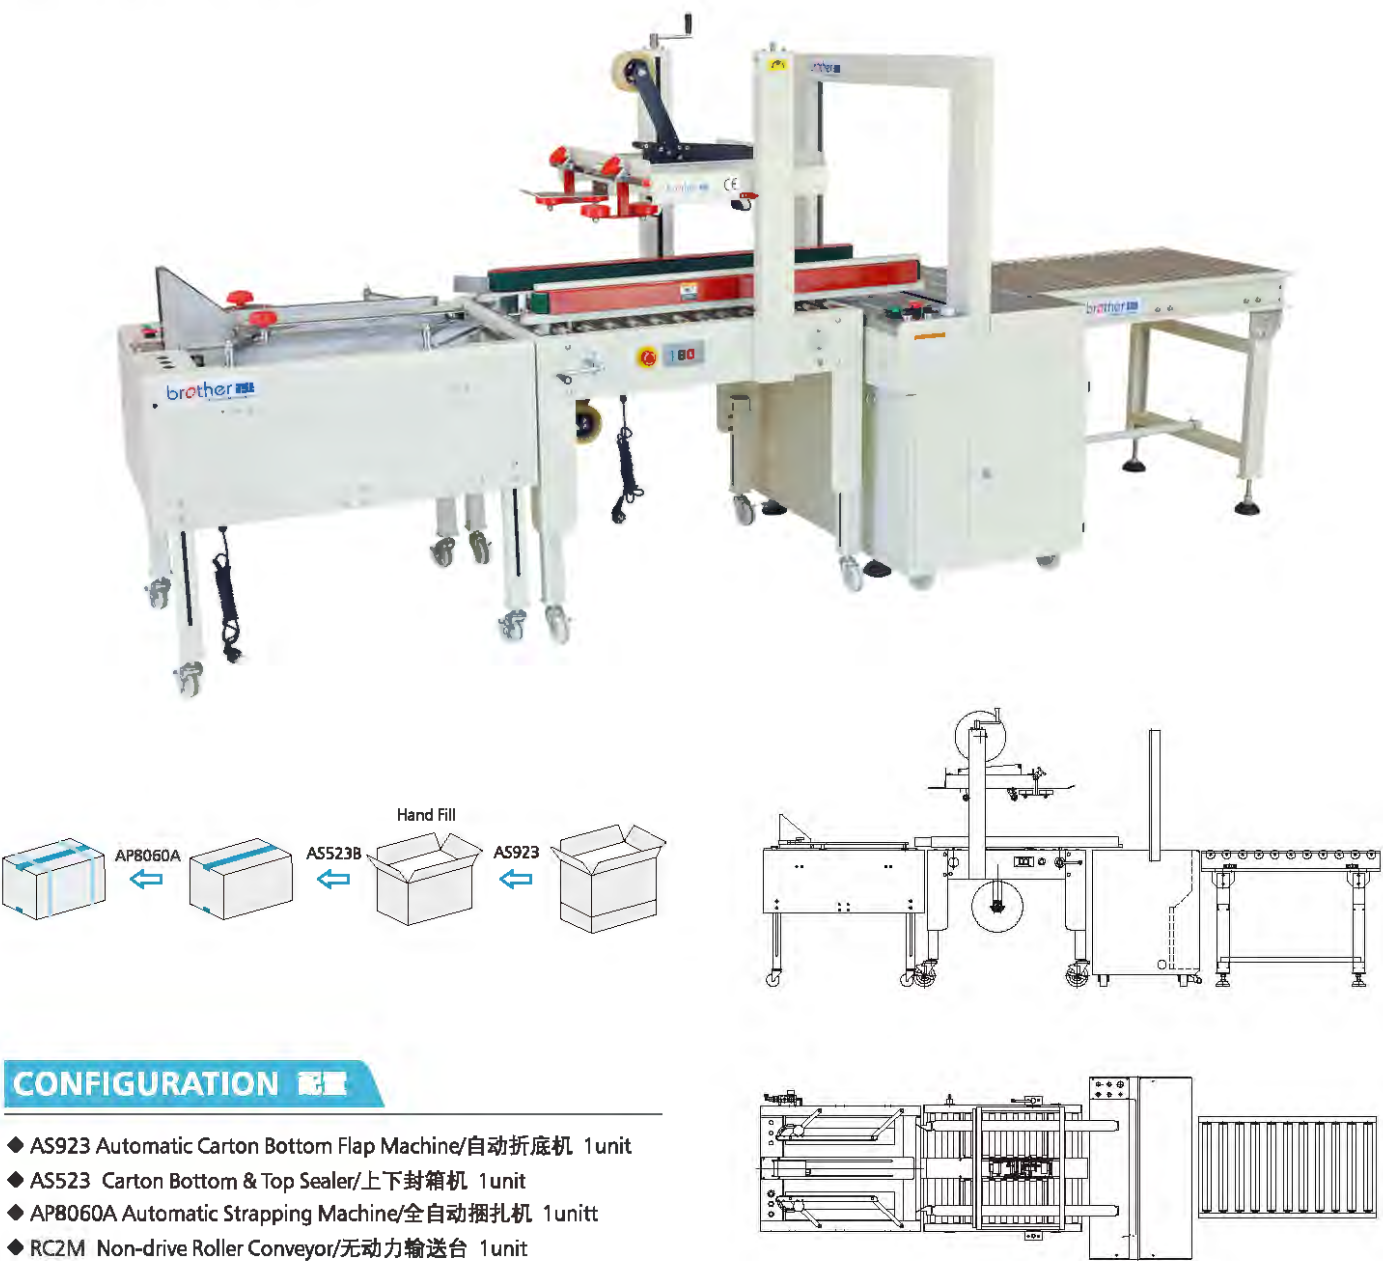


CONFIGURATION 配置

- ◆ AS923 Automatic Carton Bottom Flap Machine/自动折底机 1unit
- ◆ AS523 Carton Bottom & Top Sealer/上下封箱机 1unit
- ◆ AP8060A Automatic Strapping Machine/全自动捆扎机 1unit
- ◆ RC2M Non-drive Roller Conveyor/无动力输送台 1unit

Model/型号	AS923	AS523B	AP8060A
Conveyor speed/输送速度	20boxes/min.	20m/min.	2.18Sec./Strap
Max.Packager size/最大包件尺寸	L600 × W500mm	W500 × H580mm	W800 × H600mm
Min.Packager size/最小包件尺寸	L200 × W100mm	W100 × H100mm	W200 × H100mm
Power supply/供给电源	110V,220-240V/50-60Hz,1Phase		3Phase 380V,415V/50-60Hz
Power consumption/耗用功率	0.1KVA	0.18KVA	0.5KVA
Width of tape/胶带宽度	—	36mm,48mm,50mm,60mm	W12-15mm,T0.5-0.8mm
Machine size/机器尺寸	L950 × W800 × H780mm	L1200 × W850 × H1330mm	L1100 × W600 × H1540mm
Machine weight/机器重量	55kg	160kg	180kg

APL-CSS03

Automatic Carton Packing Line
纸箱封箱捆扎包装线

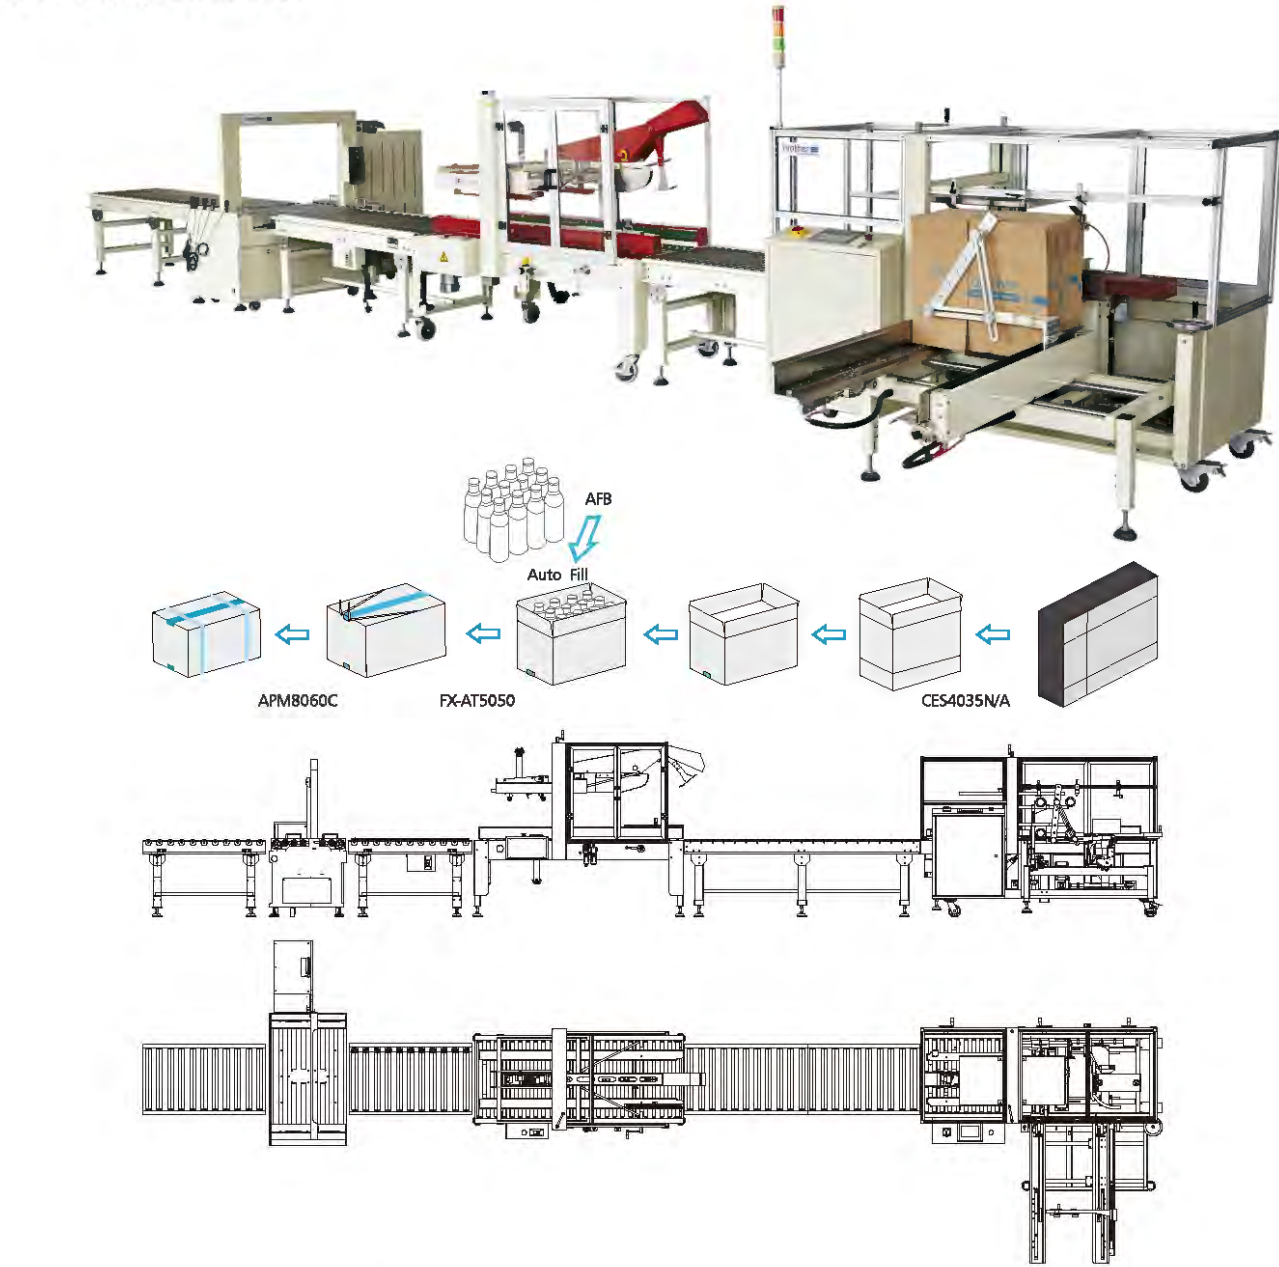

CONFIGURATION 配置

- ◆ CES4035N/A Carton Erector & Bottom Sealer/自动开箱封底机 1unit
- ◆ RC2M Non-drive Roller Conveyor/无动力输送台
- ◆ FX-AT5050 Automatic Flaps Fold & Bottom Sealer / 全自动折盖封箱机 1unit
- ◆ RC1M/D Motor-drive Roller Conveyor/动力输送台
- ◆ APM8060C Automatic Strapping Machine/全自动捆扎机 1unit
- ◆ RC2M Non-drive Roller Conveyor/无动力输送台

FEATURES 特性

The system consists of automatic carton bottom flap, automatic carton sealer, automatic strapping machine and conveying frame, which has the function of continuous automatic carton sealing and multi-belt strapping, and it not only takes up less room but also reduces the packing cost as well. It is automatic control and reliable working, convenient operation and simple maintenance while, the carton sealer and strapping machine can be used separately.

本套包装系统由自动折底机，自动封箱机，全自动捆扎机和输送架组成，具有连续自动封箱及多道捆扎包装的功能，既减少占地面积，又降低包装成本。除前部分需人工放箱装箱外，后部分的封箱捆扎为自动控制，工作可靠，操作方便，保养简单。封箱机、捆扎机也可分别单独使用。

APL-CSS05

Automatic Carton Packing Line

纸箱封箱捆扎包装线




Hand Carton Fold & Product Fill



CONFIGURATION 配置


- ◆ AS523B Automatic Carton Top & Bottom Sealer/自动封箱机 1unit
- ◆ AP8060A Automatic Strapping Machine/全自动捆扎机 1unit
- ◆ RC2M Non-drive Roller Conveyor/无动力输送台 1unit

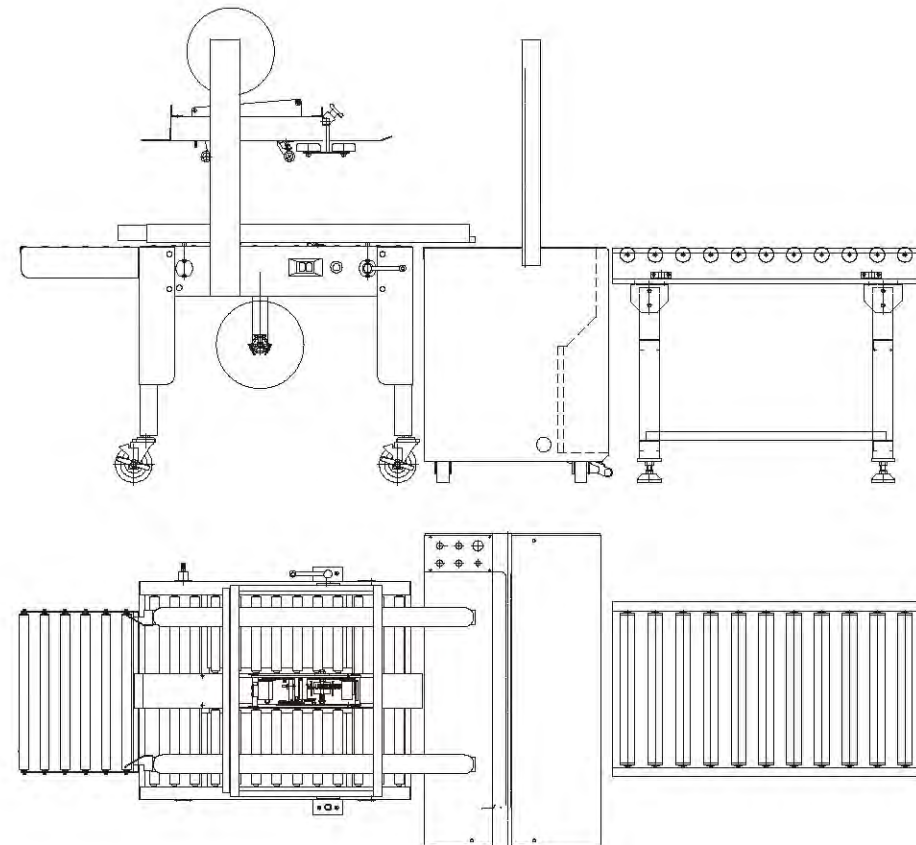

APL-CS06


Automatic Carton Packing Line

纸箱封箱包装线

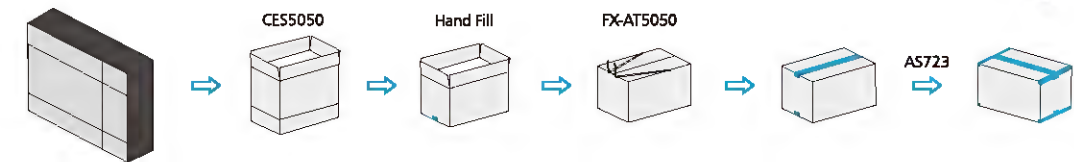

CONFIGURATION 配置


- ◆ CES4035N/A Carton Erector & Bottom Sealer/自动开箱封底机 1unit
- ◆ RC2M/D Motor-drive Roller Conveyor/动力滚筒输送机 1unit
- ◆ FX-AT5050 Automatic Top Flap Carton Sealer/自动折盖封箱机 1unit
- ◆ AS723 Automatic Carton Corner Sealer/自动角边封箱机 1unit
- ◆ RC2M Non-drive Roller Conveyor/无动力输送台 1unit

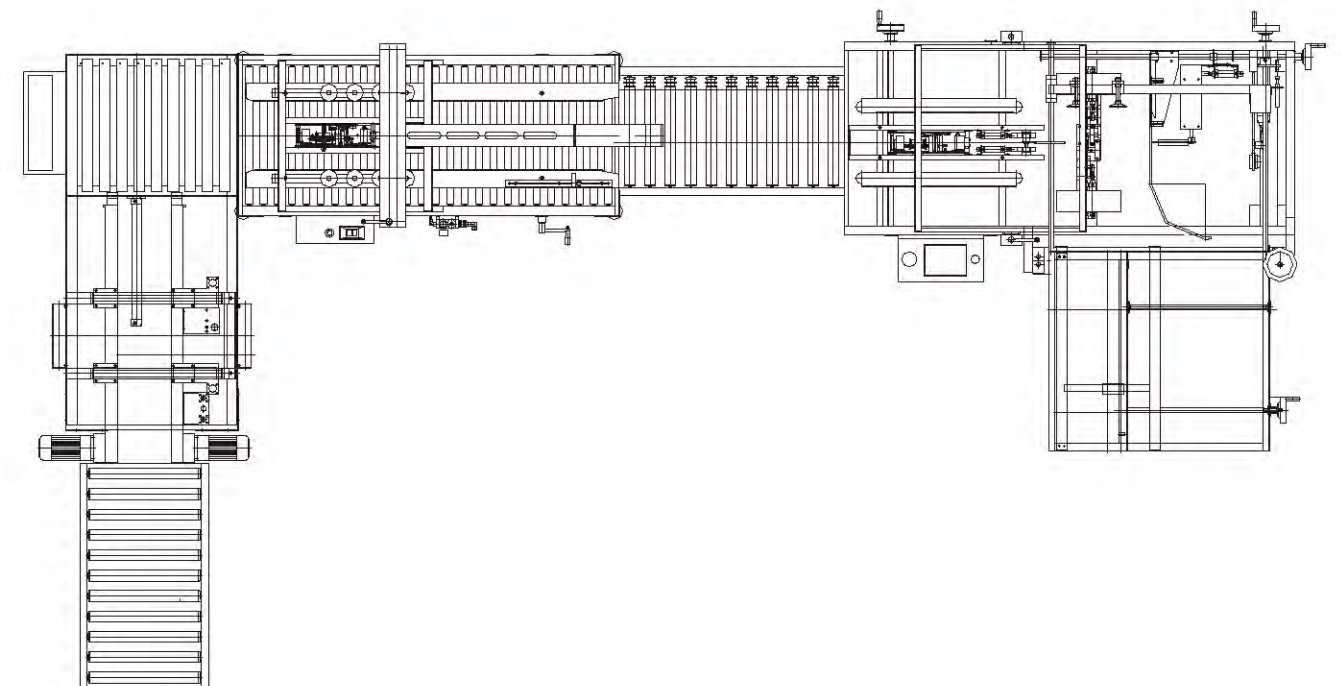

APL-CS07

Automatic Carton Packing Line

纸箱封箱包装线

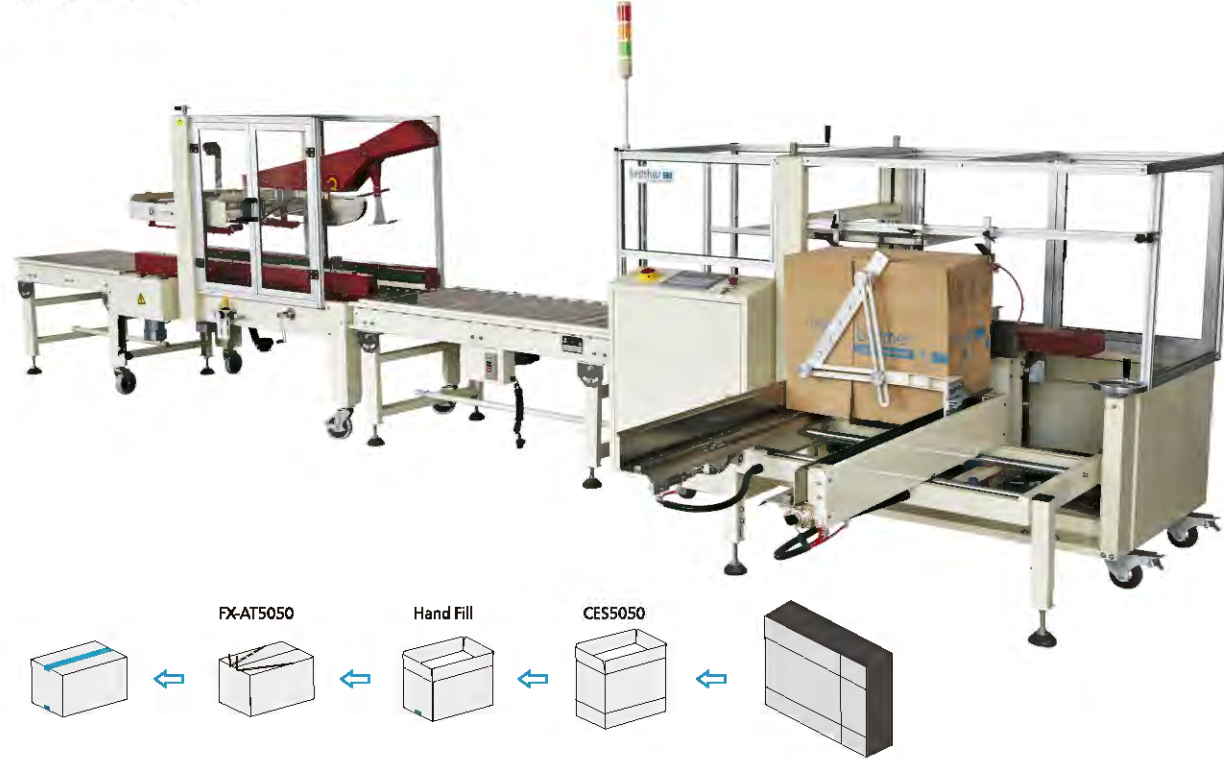


CONFIGURATION 配置

- ◆ CES4035N/A Carton Erector & Bottom Sealer/自动开箱封底机 1unit
- ◆ RC2M/D Motor-drive Roller Conveyor/动力滚筒输送机 1unit
- ◆ FX-AT5050 Automatic Top Flap Carton Sealer/自动折盖封箱机 1unit
- ◆ RC2M Non-drive Roller Conveyor/无动力输送台 1unit

OPTIONS 可选配置


- ◆ Automatic Carton Filler/自动装箱机
- ◆ More Longer Motor-drive Roller Conveyor/任意长度的动力输送机
- ◆ Automatic Palletizer/码垛机
- ◆ Automatic Pallet Stretch Wrapping Machine/自动薄膜缠绕机

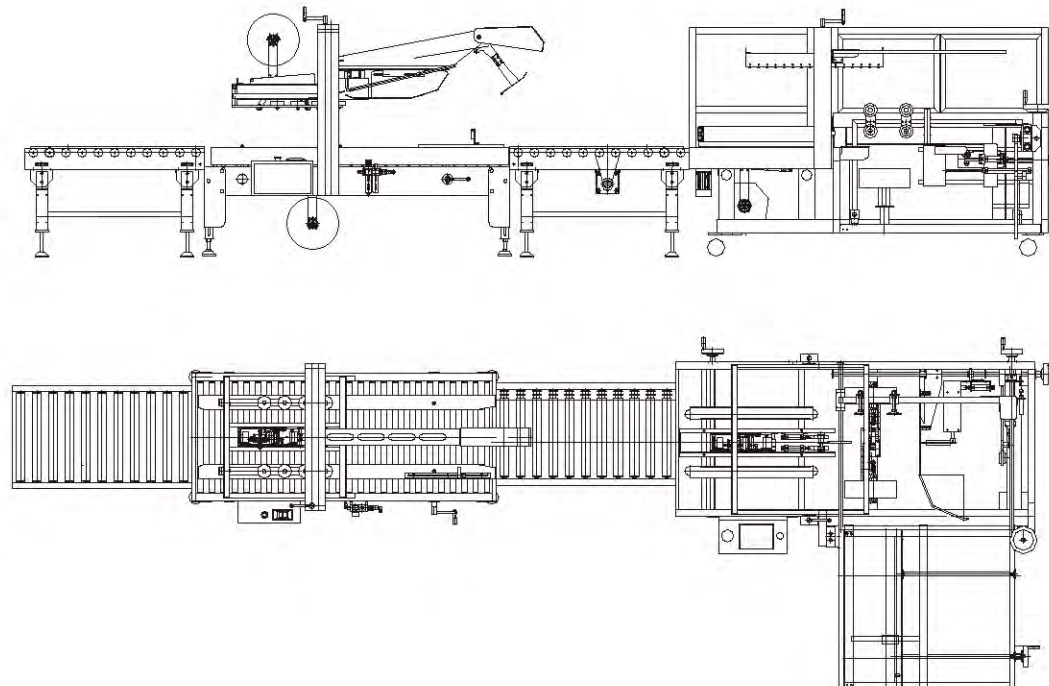

APL-CS08

Automatic Carton Packing Line


纸箱封箱包装线

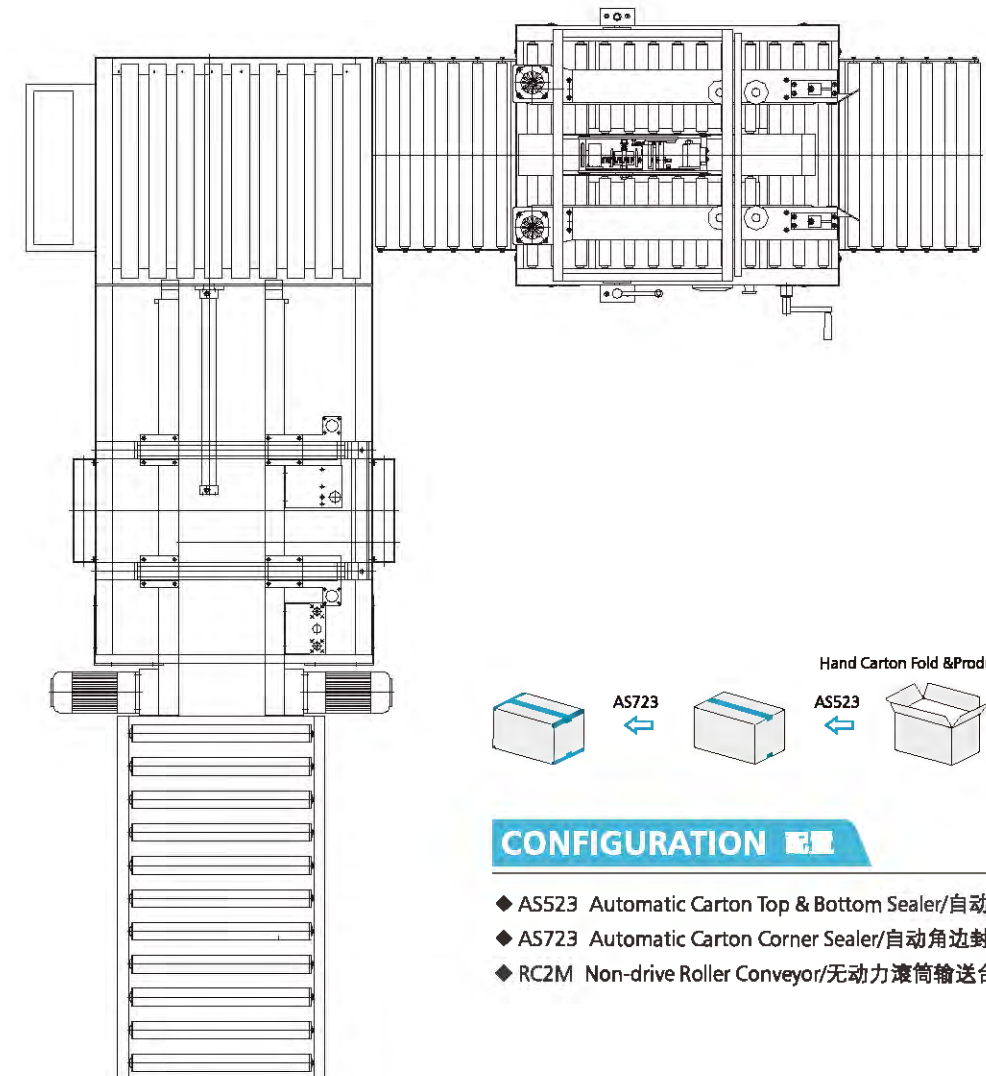


CONFIGURATION 配置

- ◆ AS523 Automatic Carton Top & Bottom Sealer/自动封箱机 1unit
- ◆ AS723 Automatic Carton Corner Sealer/自动角边封箱机 1unit
- ◆ RC2M Non-drive Roller Conveyor/无动力滚筒输送台 1unit


RC2M/D 动力滚筒输送台
Motor-drive Roller Conveyor




RC1M/2M 无动力滚筒输送台
Non-drive Roller Conveyor

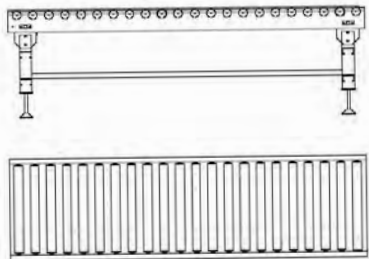


ERC3M 伸缩输送台
Extend Roller Conveyor

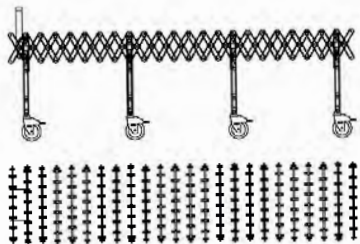

ERC4M/D 动力滚筒伸缩输送台
Motor-drive Extend Roller Conveyor

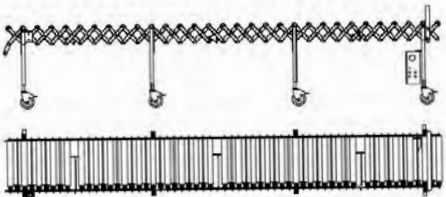


BC2M/400 动力皮带输送台
Belt Conveyor With Driving Force

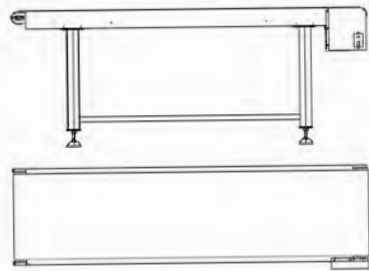


◆ Any Size Available


ERC4M/R 动力滚筒伸缩输送台
Extend Roller Conveyor With Driving Force

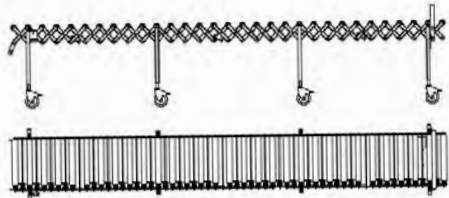

RCY180 动力滚筒圆角输送台
Corner Conveyor With Driving Force

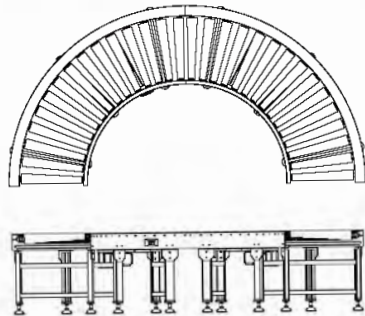

RC1M/V 90度转角推料输送台
90 Degree Push Conveyor

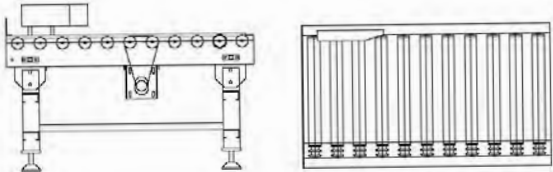

CARTONERECTOR&CARTONLOADER
CARTONERECTOR&CARTONLOADER
CARTONERECTOR&CARTONLOADER
CARTONERECTOR&CARTONLOADER
CARTONERECTOR&CARTONLOADER
CARTONERECTOR&CARTONLOADER
CARTONERECTOR&CARTONLOADER
CARTONERECTOR&CARTONLOADER
CARTONERECTOR&CARTONLOADER
CARTONERECTOR&CARTONLOADER

Carton Erector & Carton Loader

开箱机&装箱机



CES4035N


Carton Erector & Bottom Sealer 自动开箱封底机

FEATURES 特性

Vertical storage is adopted for storing carton blanks, for which carton blanks can be added at any time without stopping the machine; It's suitable for forming and sealing cartons of the same size. If carton size need to be changed, the operator should adjust the machine manually(finishing in 2-3 minutes); It's rationally designed so that the forming, folding and sealing process are accomplished simultaneously; All the parts are precise and durable,without causing any vibration in running. Running steadily with long life; Light in weight, high performance and speed.

采用立式储存纸板方式，并可随时补充纸箱板，适用于同一时间同种纸箱尺寸包装使用，如需变换纸箱规格，手动调节即可，所需时间1-2分钟；合理化设计，同步吸取成型，摺底与封底一次同步成型；体积轻巧，机件性能精密耐用，运作过程无振动，运转稳固寿命长，效率高；配装刀片防护装置，避免操作时意外刺伤；可单机作业，也可与自动化包装流水线配套使用。

Model/型号	CES4035N
Carton Size/适用纸箱	L200~500mm/W150~390mm/H100~350mm
Table height/台面高度	H 650mm
Speed/封箱速度	1-10 box/min
Dimension/机器尺寸	L2000 x W1900 x H1450mm
Power supply/电源	220V/380V 50/60HZ
Air source/气源	> 500L/min、0.4~0.8 Mpa
Tape/使用胶带	W48mm-W60-75mm x L1000
Machine weight/机器重量	NW-400kg GW-550kg

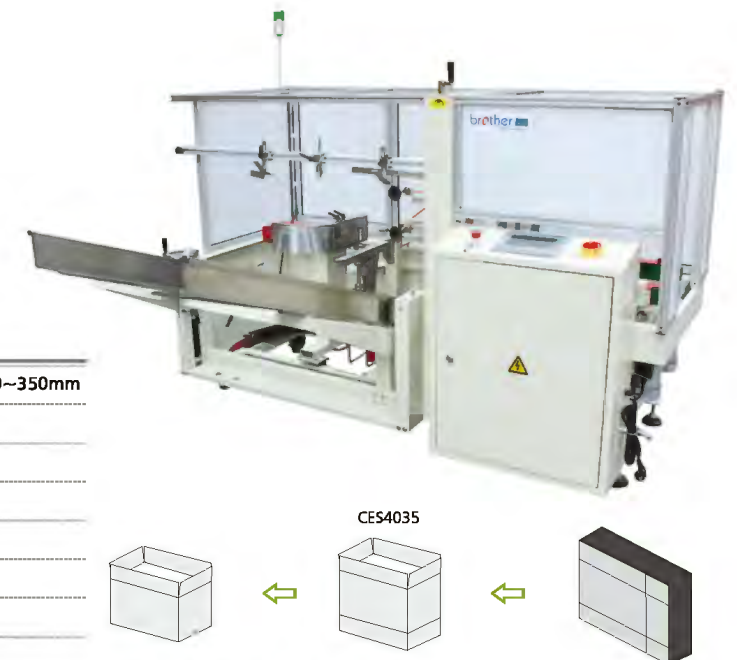

CES4035N/A

Carton Erector & Bottom Sealer 自动开箱封底机

FEATURES 特性

采用立式储存纸板方式，并可随时补充纸箱板，不需停机可随意延长储箱架。此开箱机结构设计：一次完成纸箱吸箱、开箱、成型、折底、封底等包装工序。适用于多种尺寸的纸箱自动开箱封底，如需变换纸箱规格，手动调节即可，所需时间1-2分钟；本开箱机可单机作业，也可与自动化包装流水线配套使用。本开箱机性能稳定、品质可靠、适用性强、包装效率高、使用寿命长；自动化程度高：自动开箱、自动折合下盖、自动密封下底胶带，机器采用PLC+显示屏控制，大大方便操作，是自动化规模生产必不可少的流水线设备。机件性能精密耐用，结构设计严密，运转过程无振动，运转稳定可靠；配装刀片防护装置，避免操作时意外刺伤，安全的生产，高效的包装。

Model/型号	CES4035N/A		
Carton Size/适用纸箱	L200~500mm/W150~390mm/H100~350mm	Power supply/电源	220V/380V 50/60HZ
Table height/台面高度	H 650mm	Air source/气源	> 500L/min、0.4~0.8 Mpa
Speed/封箱速度	1-10 box/min	Tape/使用胶带	W48mm-W60-75mm x L1000
Dimension/机器尺寸	L2000 x W1900 x H1450mm	Machine weight/机器重量	NW-400kg GW-550kg

GB-30

Carton Erector & Bottom Sealer
自动开箱封底机

FEATURES 特性

- ◆ 采用进口电器元件及气动元件。
- ◆ 采用立式储存纸板方式,并可随时补充纸箱板,不需停机。
- ◆ 适用于各种不同规格的包装纸箱,可根据纸箱尺寸的大小手动调节即可,1-2分钟即可完成。
- ◆ 操作简单,采用PLC+显示屏控制;减少劳动用工,提高生产效率,降低生产成本。
- ◆ 占地面积小,机件精密耐用,运作过程无振动,运转稳固寿命长,效率高。
- ◆ 配装刀片防护装置,避免操作时意外刺伤。
- ◆ 瞬间将纸箱板吸取打开成型,折底封箱同步完成;封箱效果好,美观实用。
- ◆ 可单机作业,也可与自动化包装流水线配套使用。

Model/型号	GB-30
Carton Size/试用纸箱	L200-500/W200-460/H200-400mm
Table height/台面高度	600mm
Power Supply/电源电压	3Phase 220V,380/50-60Hz
Power/功率	0.2KW
Air source/气源	> 500L/min、0.4~0.8 Mpa
Machine weight/机器重量	380kg



CES7550N/A

Carton Erector & Bottom Sealer
自动开箱封底机

FEATURES 特性

采用立式储存纸板方式,并可随时补充纸箱板,不需停机。此开箱机结构设计:一次完成纸箱吸箱、开箱、成型、折底、封底等包装工序。适用于多种尺寸的纸箱自动开箱封底,如需变换纸箱规格,手动调节即可,所需时间1-2分钟;本开箱机可单机作业,也可与自动化包装流水线配套使用。本开箱机性能稳定、品质可靠、适用性强、包装效率高、使用寿命长;自动化程度高:自动开箱、自动折合下盖、自动密封下底胶带,机器采用PLC+显示屏控制,大大方便操作,是自动化规模生产必不可少的流水线设备。机件性能精密耐用,结构设计严密,运转过程无振动,运转稳定可靠;配装刀片防护装置,避免操作时意外刺伤,安全的生产,高效的包装。

Model/型号	CES7550N/A		
Carton Size/适用纸箱	L500~750mm/W300~500mm/H100~350mm	Power supply/电源	220V/380V 50/60HZ
Table height/台面高度	H 650mm	Air source/气源	> 500L/min、0.4~0.8 Mpa
Speed/封箱速度	1-10 box/min	Tape/使用胶带	W48mm-W60-75mm x L1000
Dimension/机器尺寸	L2300 x W2000 x H1450mm	Machine weight/机器重量	NW-400kg GW-550kg



CES 4035M

Medium Box Machine
中速开箱机

FEATURES 特性

- ◆ 适用于多种尺寸的纸箱开箱封底,如需变动纸箱规格,手动调节即可,操作简单方便。
- ◆ 自动开箱、自动折合下盖、自动密封纸箱底部,机器采用PLC+人机界面控制,操作方便、维修简单、性能稳定,是自动化规模生产必不可少的流水线设备。
- ◆ 折底不停留,输送中完成折底、封底;3秒钟完成吸箱、成型、折底、封底整个过程;高速、稳定、方便、经济。
- ◆ 使用此开箱机替代人工,至少可减少2-3个包装工,节省5-10%的耗材,提高30%的效率,大大地节省成本,提升效率;更可使包装标准化。
- ◆ 已广泛地应用于食品、医药、饮料、烟草、日化、电子等各行业。

Model/型号	CES 4035M
Speed/开箱速度	15-18箱/分钟
Storage volume/纸箱暂存量	100pcs(1000mm)
Case size/纸箱尺寸	L:250-400 W:150-350 H:100-350mm
Electric/使用电力	220V 1φ 200W
Air source/必要空气压	6kg/平方厘米
Air consuming/空气消耗量	450NL/min
Machine size/机器尺寸	L2400xW2050xH1450mm
Tape size/胶带尺寸	48、60、75mm
Machine weight/机器重量	550kg




CES4030H

High Speed Box Machine
高速开箱机

FEATURES 特性

采用立式储存纸板方式,并可随时补充纸箱板,不需停机。此开箱机结构设计:一次完成纸箱吸箱、开箱、成型、折底、封底等包装工序。适用于多种尺寸的纸箱自动开箱封底,如需变换纸箱规格,手动调节即可,所需时间1-2分钟;本开箱机可单机作业,也可与自动化包装流水线配套使用。本开箱机性能稳定、品质可靠、适用性强、包装效率高、使用寿命长;自动化程度高:自动开箱、自动折合下盖、自动密封下底胶带,机器采用PLC+显示屏控制,大大方便操作,是自动化规模生产必不可少的流水线设备。机件性能精密耐用,结构设计严密,运转过程无振动,运转稳定可靠;配装刀片防护装置,避免操作时意外刺伤,安全的生产,高效的包装。

Model/型号	CES4030H		
Speed/开箱速度	25-30箱/分钟	Air source/必要空气压	6kg/平方厘米
Storage volume/纸箱暂存量	80pcs(800mm)	Air consuming/空气消耗量	450NL/min
Case size /纸箱尺寸	L:250-450 W:150-400 H:100-300mm	Machine size/机器尺寸	L3120xW1250xH1740mm
Electric/使用电力	380V 3φ 746W	Machine weight/机器重量	1200kg

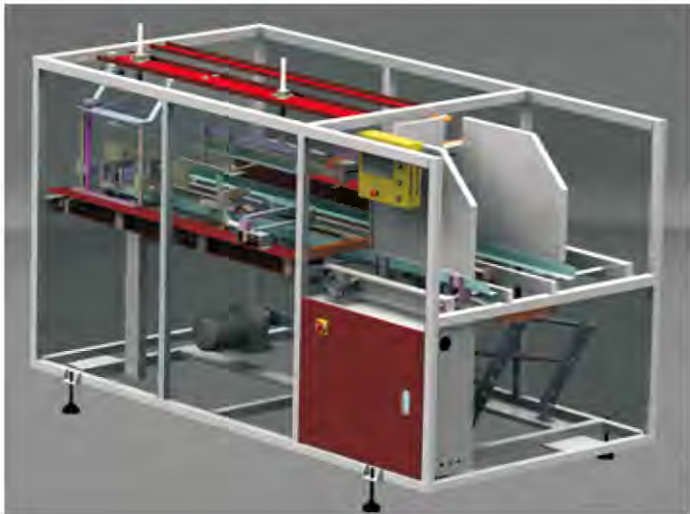

YCZX-35

Cardboard Carton Erector
纸板裹包式装箱机

FEATURES 特性

- ◆ 适用于啤酒，饮料，瓶装水，医药，食品等瓶（罐）装生产线的纸箱包装。
- ◆ 纸板裹包方式，比传统包装方式节省包材约1/5费用。
- ◆ 采用集中系统与人机界面相结合，完善了裹包各种控制功能，直接输入修改及储存多种包装规格的参数。
- ◆ 采用平纸板一次成型裹包，独特的压箱技术，纸箱成型更牢固，包装效果美观，操作人员的劳动强度降到最低，对纸板的要求也最低。
- ◆ 采用知名热熔胶设备，操作方便，经久耐用。经它包装后的产品，外形挺括、美观、贮运方便。
- ◆ 采用纤巧的机身设计，节省空间，美观，安全。



Model/型号	YCZX-35
Machine size/整机外形尺寸	5130×W2600×1800
Carton size/纸箱成型后尺寸	550<L+W+H<1000
Production ability/生产能力	L460×W280 ×350
Speed/包装速度	30包/分钟
Power supply/工作电源/功率	三相 380V，50Hz / 7KW
Machine weight/机器重量	≈2500kg

DR-A

Delta robot
并联机器人



FEATURES 特性

视觉拾取机械手用于装配，拾取，包装领域，针对不规则，凌乱的多物料，可以准备的进行分类包装，采用高速摄像机对物料进行图像采集，通过数据处理，转化成信号传送给机械手臂，从而进行作业。

特点:

1. 速度快，荷重大，精度佳，易用性强。
2. 占用空间小，节省宝贵的场地资源。
3. 不同物料可以通过软件来调整动作适应包装要求。
4. 可以轻松集成到机械设备及生产线中。
5. 可进行物料计数，叠加，分类。
6. 带冲洗结构，维修量小。

Model/型号	DR-A		
Vision accuracy/视觉精度	+/- 0.5 mm	Power supply/电源	220V/380V 50/60HZ
Positioning accuracy/重复定位精度	0.1 mm	Weight/重量	120-145 kg
Dimension/直径	880-1130 mm	Stlyes of installation/安装方式	倒置式
Speed/最大速度	10 m/ s2	Machine size/外形尺寸	950-1050 mm



AFB-III

Automatic Carton Filler
自动装箱机(跌落式装箱)

FEATURES 特性

- ◆ 自动包装流水线中，装箱机是整个系统运行的核心。
- ◆ 装箱机用于完成运输包装，它是将包装成品按一定排列装入纸箱的一种机械。
- ◆ 采用P.L.C + 触摸显示屏控制。设有缺瓶报警停机，无瓶不装箱安全装置。
- ◆ 大大方便操作、管理、减少生产人员和劳动强度，是自动化规模生产必不可少的设备。
- ◆ 我公司生产的装箱机为摆复式全自动装箱机。适用于各生产线上的小瓶口的各类瓶型。

Model/型号	AFB
Power supply/电源电压	220V/50Hz
Power/功率	1.5KVA
Speed/装箱速度	5-10 box/min
Use gas source/使用气源	400l/min
Machine size/机器尺寸	L1500×W1200×H2600mm
Machine weight/机器重量	400kg

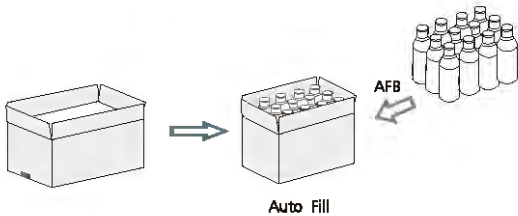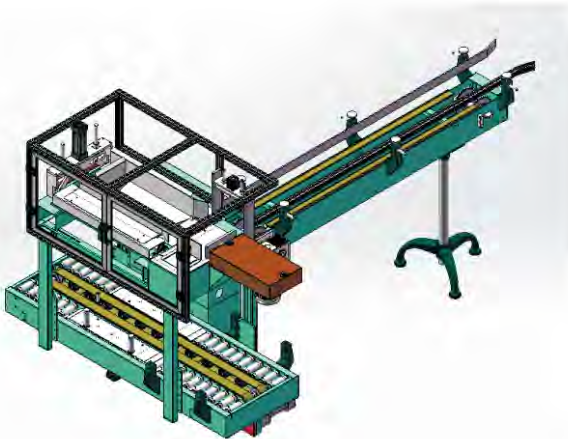

ROBOT-A

Six axis robot
六轴机器人装箱

FEATURES 特性

视觉拾取机械手用于装配，拾取，包装领域，针对不规则，凌乱的多物料，可以准备的进行分类包装，采用高速摄像机对物料进行图像采集，通过数据处理，转化成信号传送给机械手臂，从而进行作业。

特点:

1. 速度快，荷重大，精度佳，易用性强。
2. 占用空间小，节省宝贵的场地资源。
3. 不同物料可以通过软件来调整动作适应包装要求。
4. 可以轻松集成到机械设备及生产线中。
5. 可进行物料计数，叠加，分类。
6. 带冲洗结构，维修量小。



AFB-II

Automatic Carton Filler
自动装箱机(双头瓶装抓取式装箱)



FEATURES 特性

在自动包装流水线中，装箱机是整线系统运行的核心，包装机械虽不是产品直接生产机械，但它却是实现生产自动化所必需的。装箱机用于完成运输包装，它是将包装成品按一定排列方式和定量装入箱中的一种机械。我公司生产的包装机为摆复式全自动装箱机。

In the whole package line, case packer is the center of the whole system. Case packer will transport and pack the finished product in to paper box according to the required arrange. Case packer manufactured by our company is sway model full auto case packer.

Model/型号	AFB-II
Power supply/电源电压	380V/50Hz
Power/功率	3.7KW
Speed/装箱速度	10-12 box/min
Air source pressure/气源压力	0.5-0.8Mpa
Cylinder work pressure/气缸工作压力	0.6Mpa
Grappling work pressure/抓头工作压力	0.25Mpa
Total Air consumption/设备总耗量	0.9m3/h

电器配置说明
Electrical Configuration
PLC选用三菱，变频器选用施耐德或松下，
低压电器选用施耐德。
We mainly use Mitsubishi PLC,Schneider and Panasonic
Inverter,Schneider low-voltage apparatus.

适用装箱品种类型
Applicable Types Of Bottle
适用于各生产线的小瓶口的各类瓶型。
Applicable to all small-bottle neck production lines of
various types.

备注：设备可以与本公司配套生产的自动开箱机，动力输送台，自动折盖封箱机，自动捆扎机等配套使用。

Carton
Sealer

封箱机

CARTON SEALER
CARTON SEALER
CARTON SEALER
CARTON SEALER
CARTON SEALER
CARTON SEALER
CARTON SEALER




FXJ6050

Semi-Automatic Carton Sealer 半自动封箱机

Standard Model 标准型

Top & Bottom Drive Belt 上下皮带驱动

Model/型号	FXJ6050
Conveyor speed/输送速度	20m/min.
Max.Packager size/最大包件尺寸	W500 × H600mm
Min.Packager size/最小包件尺寸	W150 × H120mm
Width of tape/胶带宽度	36mm,48mm,50mm,60mm
Power supply/供给电源	110V,220-240V/50-60Hz
Power consumption/耗用功率	0.18KVA
Machine size/机器尺寸	1630 × 800 × 1330mm
Machine weight/机器重量	145kg



FXJ5050 II

Semi-Automatic Carton Sealer 半自动封箱机

Standard Model 标准型

Top & Bottom Drive Belt 上下皮带驱动

Model/型号	FXJ5050 II
Conveyor speed/输送速度	20m/min.
Max.Packager size/最大包件尺寸	W500 × H500mm
Min.Packager size/最小包件尺寸	W150 × H120mm
Width of tape/胶带宽度	36mm,48mm,50mm,60mm
Power supply/供给电源	110V,220-240V/50-60Hz
Power consumption/耗用功率	0.18KVA
Machine size/机器尺寸	1630 × 800 × 1230mm
Machine weight/机器重量	145kg



FEATURES 特性

- ◆ Top and Bottom drive belts(FXJ6050)
- ◆ Inter changeable top bottom tape cartridge
- ◆ 2" Top and Bottom Tape Head
- ◆ Tape Overlap length can be adjusted from 5~50mm
- ◆ Roller working table
- ◆ Manual Top Squeezers
- ◆ Blade guards
- ◆ Crank Handle adjustments
- ◆ Leg height adjustment 240mm

- ◆ Infeed/Outfeed Tables and 3" Tape Head are optional
- ◆ Optional casters locking/swivel
- ◆ 3 inch side sealing are optional
- ◆ 可按要求定制75mm贴边尺寸

FXJ系列封箱机主要适用于纸箱的封口包装，既可单机作业，也可与流水线配套使用，广泛应用在家用电器、纺织、食品、百货、医药、化工等行业。封箱机采用即贴胶带对纸箱封口，经济快速、容易调整，可一次完成上、下封箱动作，采用印字胶带，更可提高产品形象。


FXJ6060

Semi-Automatic Carton Sealer 半自动封箱机

Strong Model 加强型

Top & Bottom Drive Belt 上下皮带驱动

Model/型号	FXJ6060
Conveyor speed/输送速度	20m/min.
Max.Packager size/最大包件尺寸	W600 × H600mm
Min.Packager size/最小包件尺寸	W150 × H110mm
Width of tape/胶带宽度	36mm,48mm,50mm,60mm
Power supply/供给电源	110V,220-240V/50-60Hz
Power consumption/耗用功率	0.24KVA
Machine size/机器尺寸	1830 × 840 × 1330mm
Machine weight/机器重量	160kg

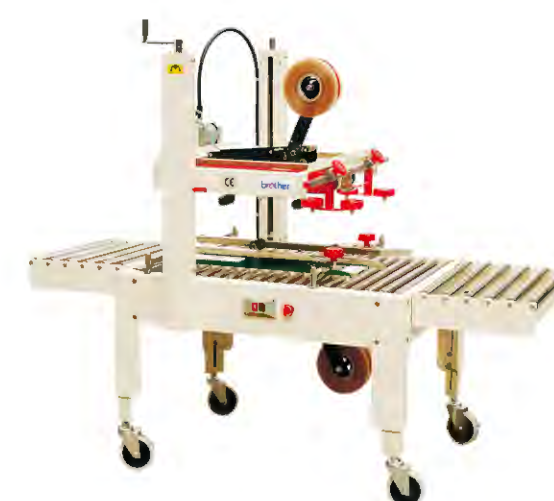

FXJ5050I

Semi-Automatic Carton Sealer 半自动封箱机

Standard Model 标准型

Side Drive Belt 两侧皮带驱动

Model/型号	FXJ5050I
Conveyor speed/输送速度	20m/min.
Max.Packager size/最大包件尺寸	W500 × H500mm
Min.Packager size/最小包件尺寸	W100 × H100mm
Width of tape/胶带宽度	36mm,48mm,50mm,60mm
Power supply/供给电源	110V,220-240V/50-60Hz
Power consumption/耗用功率	0.18KVA
Machine size/机器尺寸	1660 × 850 × 1260mm
Machine weight/机器重量	120kg



FEATURES 特性

- ◆ Top and Bottom drive belts(FXJ6060)
- ◆ Side drive belts(FXJ5050)
- ◆ Intchangeable top bottom tape cartridge
- ◆ 2.5" Top and Bottom Tape Head
- ◆ Tape Overlap length can be adjusted from 5mm to 50mm
- ◆ Roller working table
- ◆ Manual Top Squeezers
- ◆ Blade guards
- ◆ Crank Handle adjustments

- ◆ Leg height adjustment 240mm
- ◆ Options: 3 inch Tape Head; 3Inch Tape overlap length

- ◆ 上部及下部驱动皮带系统确保、重纸箱输送
- ◆ 机芯上下可互换，且置换简便容易
- ◆ 皮带的张力、胶粘带的张力调整容易，可适用于软硬纸箱
- ◆ 工作台面可调：550~840mm，操作感觉舒适
- ◆ 纸箱宽度及高度调整容易，以曲柄反手调整
- ◆ 选配功能：使用75mm宽的胶带，75mm长贴边尺寸

FXJ5050 III

Semi-Automatic Carton Sealer
半自动封箱机

Side Drive Belt 两侧皮带驱动

Model/型号	FXJ5050III
Conveyor speed/输送速度	20m/min.
Max.Packager size/最大包件尺寸	W500×H500mm
Min.Packager size/最小包件尺寸	W100×H100mm
Width of tape/胶带宽度	36mm,48mm,50mm,60mm
Power supply/供给电源	110V,220-240V/50-60Hz
Power consumption/耗用功率	0.18KVA
Machine size/机器尺寸	1860×850×1260mm
Machine weight/机器重量	120kg



FX50/60

Semi-Automatic Carton Bottom Sealer
半自动封箱机

Model/型号	FX50/60
Conveyor speed/输送速度	20m/min.
Max.Carton width/最大纸箱宽度	W500mm / W600mm
Min.Carton width/最小纸箱宽度	W100mm
Width of tape/胶带宽度	36mm,48mm,50mm,60mm
Power supply/供给电源	110V,220-240V/50-60Hz
Power consumption/耗用功率	0.18KVA
Machine size/机器尺寸	1630×800×900mm / 1630×900×900mm
Machine weight/机器重量	70kg / 75kg



FEATURES 特性

- ◆ Side drive belts
- ◆ Inter changeable top bottom tape cartridge
- ◆ 2" Top and Bottom Tape Head
- ◆ Tape Overlap length can be adjusted from 5~50mm
- ◆ Roller working table
- ◆ Manual Top Squeezers
- ◆ Blade guards
- ◆ Crank Handle adjustments
- ◆ Leg height adjustment 240mm

- ◆ Infeed/Outfeed Tables and 3" Tape Head are optional
- ◆ Optional casters locking/swivel
- ◆ 3 inch side sealing are optional
- ◆ 可按要求定制75mm贴边尺寸


FXJ系列封箱机主要适用于纸箱的封口包装，既可单机作业，也可与流水线配套使用，广泛应用在家用电器、纺织、食品、百货、医药、化工等行业。封箱机采用即贴胶带对纸箱封口，经济快速、容易调整，可一次完成上、下封箱动作，采用印字胶带，更可提高产品形象。

AS123

Semi-Automatic Carton Sealer
半自动封箱机

Top Sealing Model 单封型
Side Drive Belt 两侧皮带驱动

Model/型号	AS123
Conveyor speed/输送速度	20m/min.
Max.Packager size/最大包件尺寸	W500×H600mm
Min.Packager size/最小包件尺寸	W100×H80mm
Width of tape/胶带宽度	36mm,48mm,50mm,60mm
Power supply/供给电源	110V,220-240V/50-60Hz
Power consumption/耗用功率	0.18KVA
Machine size/机器尺寸	1580×740×1330mm
Machine weight/机器重量	145kg



AS223

Semi-Automatic Carton Sealer
半自动封箱机

Double useful Model 两用型
Top & Bottom Drive Belt(Widen belt) 上下皮带驱动

Model/型号	AS223
Conveyor speed/输送速度	20m/min.
Max.Packager size/最大包件尺寸	W500×H580mm
Min.Packager size/最小包件尺寸	W100×H80mm
Width of tape/胶带宽度	36mm,48mm,50mm,60mm
Power supply/供给电源	110V,220-240V/50-60Hz
Power consumption/耗用功率	0.18KVA
Machine size/机器尺寸	1550×820×1320mm
Machine weight/机器重量	120kg



FEATURES 特性

- ◆ Top and Bottom drive belts(AS223)
- ◆ Side drive belts(AS123)
- ◆ 2" Top and Bottom Tape Head
- ◆ Tape Overlap length can be adjusted from 5~50mm
- ◆ Manual Top Squeezers
- ◆ Blade guards
- ◆ Crank Handle adjustments
- ◆ Leg height adjustment 240mm
- ◆ Options: Top & Bottom together sealing(AS223)3 inch Tape Head; 3 Inch Tape overlap length; Infeed Roller Table

- ◆ 轻巧耐用，操作简便，无噪音
- ◆ 左右皮带驱动，适用于较小纸箱(AS123)
- ◆ 上下方皮带驱动，适用较重纸箱(AS223)
- ◆ 标准规格品，零件随时供应
- ◆ 单侧封口，适合作纸箱用
- ◆ 可选择单侧封口，也可选择上下同时封口(AS223)
- ◆ 选配功能：AS223机可选用上下同时封口；使用75mm宽的胶带；75mm长贴边尺寸；入口滚筒辅助托架
- ◆ Japanese technical cooperation model & Popular products sales in Japan market

AS423

Semi-Automatic Carton Sealer 半自动封箱机

Side Sealing Model 侧封型

Top & Bottom Drive Belt 上下皮带驱动

Model/型号	AS423
Conveyor speed/输送速度	20m/min.
Max.Packager size/最大包件尺寸	W500 × H500mm
Min.Packager size/最小包件尺寸	W150 × H70mm
Width of tape/胶带宽度	36mm,48mm,50mm,60mm
Power supply/供给电源	110V,220-240V/50-60Hz
Power consumption/耗用功率	0.18KVA
Machine size/机器尺寸	1100 × 900 × 1320mm
Machine weight/机器重量	180kg



AS523

Semi-Automatic Carton Sealer 半自动封箱机

European Style Model 技术领先型

Side Drive Belt 两侧皮带驱动

Model/型号	AS523
Conveyor speed/输送速度	20m/min.
Max.Packager size/最大包件尺寸	W500 × H580mm
Min.Packager size/最小包件尺寸	W100 × H100mm
Width of tape/胶带宽度	36mm,48mm,50mm,60mm
Power supply/供给电源	110V,220-240V/50-60Hz
Power consumption/耗用功率	0.18KVA
Machine size/机器尺寸	1740 × 850 × 1330mm
Machine weight/机器重量	160kg



FEATURES 特性

- ◆ Top and Bottom drive belts, Carton go smoothly(AS423)
- ◆ Side drive belts(AS523)
- ◆ 2.5" Top and Bottom Tape Head
- ◆ Tape Overlap length can be adjusted from 5~50mm
- ◆ Suitable for side open cartons of beverages, floor tiles(AS423)
- ◆ Suitable for top & bottom open, small size cartons(AS523)
- ◆ Crank Handle adjustments
- ◆ Leg height adjustment 240mm
- ◆ Options: 3 inch side sealing are optional
Infeed table & Outfeed table(AS423)

- ◆ 轻巧耐用，操作简便，无噪音
- ◆ 上下皮带驱动，纸箱输送平稳，封箱效果好(AS423)
- ◆ 两侧皮带驱动，纸箱输送平稳，封箱效果好(AS523)
- ◆ 适用于侧边开口纸箱的封口，如饮料、地砖等(AS423)
- ◆ 适用于上下开口且较小的纸箱封口(AS523)
- ◆ 标准规格品，零件随时供应
- ◆ 选配功能：使用75mm宽的胶带；75mm长贴边尺寸
- ◆ Japanese technical cooperation model & Popular products sales in Japan market

AS323

Manual Flaps Fold & Bottom Sealer 手动纸箱折盖封底机

Auto.Fold Model 自动折盖型

Side Drive Belt 两侧皮带驱动

Model/型号	AS323
Conveyor speed/输送速度	20m/min.
Max.Packager size/最大包件尺寸	L600 × W500 × H600mm
Min.Packager size/最小包件尺寸	L200 × W150 × H100mm
Width of tape/胶带宽度	36mm,48mm,50mm,60mm
Power supply/供给电源	110V,220-240V/50-60Hz
Power consumption/耗用功率	0.18KVA
Machine size/机器尺寸	2000 × 890 × 1220mm
Machine weight/机器重量	190kg



AS323局部工作效果图



AS323封箱原理示意图

FXJ6050S/AS523S

Manual Flaps Fold & Bottom Sealer 手动纸箱折盖封底机

Stainless steel Model 不锈钢型

Full Stainless steel material 全不锈钢材质

- ◆ All specification same as FXJ6050/AS523
- ◆ 所有技术参数与FXJ6050/AS523相同



FX-AT5050

Automatic Flaps Fold & Bottom Sealer
全自动折盖封箱机

Auto.Fold Model 自动折盖型
Side Drive Belt 两侧皮带驱动

FEATURES 特性

- ◆ Interchangeable top bottom tape cartridge
- ◆ 2" Top and Bottom Tape Head
- ◆ Adjustment to various cartons size
- ◆ The top is automatically folded
- ◆ Automatic feed in time, without man-care, available to connect to full automatic production line
- ◆ Leg height adjustment 350mm
- ◆ Infeed/Outfeed Tables and 3" Tape Head are optional
- ◆ 机芯上下可互换, 且置换简便容易
- ◆ 各种宽度胶带上下机芯封口
- ◆ 可调节使用多种尺寸纸箱
- ◆ 上部自动摺盖
- ◆ 及时自动送料, 无需人工操作, 可以与自动流水线配套
- ◆ 工作台高度可以根据需要调节
- ◆ 用气量约: 160L/min



FXJ6050B/8060B

Automatic Flaps Fold & Bottom Sealer
全自动折盖封箱机

Heavy Duty Model 载重型
Top & Side Drive Belt 上部及两侧皮带驱动

FEATURES 特性

- ◆ Top and Side drive belts
- ◆ Interchangeable top bottom tape cartridge
- ◆ 2" Top and Bottom Tape Head
- ◆ Roller working table
- ◆ Manual Top Squeezers
- ◆ Crank Handle adjustments
- ◆ Leg height adjustment 290mm(FXJ8060B)
- ◆ 上部及下部驱动皮带系统确保、重纸箱输送
- ◆ 机芯上下可互换, 且置换简便容易
- ◆ 皮带的张力、胶粘带的张力调整容易, 可适用于软硬纸箱
- ◆ 工作台面可调: 550~840mm, 操作感觉舒适


Model/型号	FXJ8060B	FXJ6050B	FX-AT5050
Conveyor speed/输送速度	16m/min.	16m/min.	16m/min.
Max.Packager size/最大包件尺寸	W600×H800mm	W500×H600mm	W500×H500mm
Min.Packager size/最小包件尺寸	W120×H150mm	W110×H150mm	W120×H120mm
Power supply/供给电源	110V,220-240V/50-60Hz,1Phase		
Power consumption/耗用功率	300W	300W	240W
Width of tape/胶带宽度	36mm,48mm,60mm	36mm,48mm,60mm	36mm,48mm,60mm
Machine size/机器尺寸	1870×950×1610mm	1730×850×1380mm	1780×950×1400mm
Machine weight/机器重量	145kg	145kg	240kg

AS723

Automatic Carton Corner Sealer
全自动角边封箱机

Carton Corner Type 角边封箱
Corner-type full automatic carton sealing machine

Model/型号	AS723
Conveyor speed/输送速度	6~10boxes/min.
Max.Packager size/最大包件尺寸	L500×W500×H500mm
Min.Packager size/最小包件尺寸	L320×W200×H180mm
Power supply/供给电源	220V/380V、1φ-3φ、50-60Hz
Use gas source/使用气源	6kg、f/cm2-150n/min
Width of tape/胶带宽度	48mm,60mm,75mm
Machine size/机械尺寸	L1900×W1130×H1530mm
Machine weight/机器重量	380kg

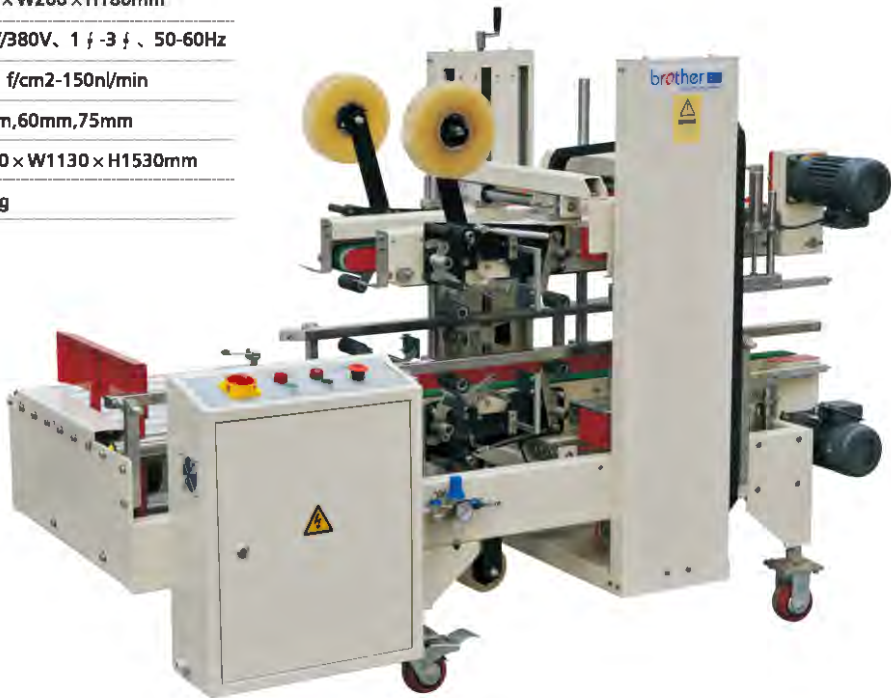

FEATURES 特性

- ◆ This set is a foursquare one-unit series. It can be combined with other "I"-shaped taping machine to operate(I-shaped automatically carton sealing)
- ◆ Transmission design, operate by upper and lower transmission box affixed with sealed carton
- ◆ Within carton specification, normalize the same carton based on the same packing sheet, finish by manual adjustment for specification change(just 1 minute for adjustment)
- ◆ On-line process adopt L type forward push steering
- ◆ Machine parts are precise and durable, with long operating life
- ◆ Guarantee more artificial stickers with beauty, fast speed, high efficiency
- ◆ 本套系列是以单机组合配套, 单机型四角边封箱系列。可配合其他 “一” 字型贴带机型联机配套, 组合成(工字型自动封箱)作业
- ◆ 传动设计方式, 采用上下传动送箱贴带封箱包装作业
- ◆ 适用纸箱规格内, 于同时包装单规格化之同一纸箱, 于改变规格手动调整型, (所需调整时间仅1分钟内)完成
- ◆ 联机流程——采用L式顺向推入转向
- ◆ 机件性能精密又耐用, 运转稳固寿命长
- ◆ 保证较人工贴带美观、速度快、效率高



AS-823A

Pneumatic Carton Sealer

自动尺寸调节封箱机

Pneumatic adjust Model 气动调节型
Top & Bottom Drive Belt 上下皮带驱动

FEATURES 特性

- ◆ Top and Bottom drive belts
- ◆ Interchangeable top & bottom tape cartridge
- ◆ 2" Top and Bottom Tape Head
- ◆ Roller working table
- ◆ Automatic adjust carton size
- ◆ Blade guards
- ◆ Leg height adjustment 290mm (FXJ8060B)
- ◆ 上部及下部驱动皮带系统确保、重纸箱输送
- ◆ 机芯上下可互换，且置换简便容易
- ◆ 皮带的张力、胶粘带的张力调整容易，可适用于软硬纸箱
- ◆ 针对不同纸箱的尺寸，机器自动调节并工作
- ◆ 工作台面可调：550~840mm，操作感觉舒适
- ◆ 用气量约：250L/min




AS-623A

Pneumatic Carton Sealer

自动尺寸调节封箱机

FEATURES 特性

- ◆ Top and Bottom drive belts
- ◆ Interchangeable side tape cartridge
- ◆ Top belt pressure adjustable
- ◆ Roller working table
- ◆ Tape head take off easily
- ◆ Blade guards
- ◆ Leg height adjustment 290mm (FXJ8060B)
- ◆ 上部及下部驱动皮带系统确保、重纸箱输送
- ◆ 机芯左右可互换，且置换简便容易
- ◆ 上皮带的压力可调整，可适用于膨松泡沫盒
- ◆ 工作台面可调：550~840mm，操作感觉舒适



Full Stainless Steel Material

Model/型号	AS823A	AS623
Power/电源	220V/50Hz	220V/50Hz 2 × 120W
Driving belt speed/封箱速度	2 × 90W16m/min	18m/min
Range of box dimensions/包装箱尺寸	Length: 200mm~∞ Width: 150mm~500mm Height: 120mm~500mm	Length: 150mm~∞ Width: 260mm~460mm Height: 100mm~500mm
Adhesive band used/使用胶带	OPP(BOPP, 牛皮纸, PV)胶带	OPP(BOPP, 牛皮纸, PV)胶带
Width of adhesive band/封箱胶带宽度	36mm, 48mm, 60mm (60以上需定制)	36mm, 48mm, 60mm (60以上需定制)
Height of working table/工作台高度	560~750mm	560~750mm
Dimension/外形尺寸(长 × 宽 × 高)	980 × 1000 × 1300(mm)	1000 × 900 × 1300(mm)
Net weight/重量	120kg	160kg

FX-AT5050B

Carton Sealer & Auto.Flaps Fold


半自动封箱机&自动折盖封箱机

Auto.Fold Model 自动折盖型
Side Drive Belt 两侧皮带驱动

FEATURES 特性

- ◆ 机芯上下可互换，且置换简便容易
- ◆ 各种宽度胶带上下机芯封口
- ◆ 可调节使用多种尺寸纸箱
- ◆ 上部自动折盖
- ◆ 无需人工操作，可以与自动流水线配套
- ◆ 工作台高度可以根据需要调节

Model/型号	FX-AT5050B
Power supply/供给电源	220V/50-60Hz
Power/功率	0.24KW
Min.Packager size/最小包件尺寸	L200 × W120 × H120mm
Max.Packager size/最大包件尺寸	L600 × W500 × H500mm
Conveyor speed/输送速度	16m/min.
Use gas source/用气量	300L/min
Width of tape/胶带宽度	36mm, 48mm, 60mm (60以上需定制)
Machine size/机械尺寸	L1780 × W950 × H1640mm
Machine weight/机器重量	260kg



FX-AT5050L

Carton Sealer & Auto.Flaps Fold

半自动封箱机&自动折盖封箱机

Auto.Fold Model 自动折盖加长型
Side Drive Belt 两侧皮带驱动

FEATURES 特性

- ◆ 机芯上下可互换，且置换简便容易
- ◆ 各种宽度胶带上下机芯封口
- ◆ 可调节使用多种尺寸纸箱
- ◆ 上部自动折盖
- ◆ 及时自动供料，无需人工操作，可以与自动流水线配套
- ◆ 工作台高度可以根据需要调节

Model/型号	FX-AT5050L
Power supply/电源电压	110V, 220~240V/50Hz-60Hz
Power/功率	480W
Max.Packager size/最大包装尺寸	1100 × 460 × 1000mm
Min.Packager size/最小包装尺寸	300 × 150 × 200mm
Speed/皮带速度	16m/min.
Machine weight/机器重量	285kg
Machine Size/外型尺寸	3120 × 960 × 2040mm



FXJ9050T

Bottom Sealer&Automatic Carton Filler

半自动封箱机&自动折底封箱机

Special Model 特殊型 (高窄型)
Side & Bottom Drive Belt 上下皮带驱动
& Special Motor

Model/型号	FXJ9050T
Conveyor speed/输送速度	16m/min.
Max.Packager size/最大包件尺寸	W500 × H900mm
Min.Packager size/最小包件尺寸	W130 × H110mm
Width of tape/胶带宽度	36mm,48mm,50mm,60mm
Power supply/供给电源	110V,220-240V/50-60Hz
Power consumption/耗用功率	0.24KVA1
Machine size/机器尺寸	830 × 840 × 1330mm
Machine weight/机器重量	130kg

注：工作台面最低230mm

FEATURES 特性

- ◆ Side and Bottom drive belts
- ◆ Intechangeable top bottom tape cartridge
- ◆ 2.5" Top and Bottom Tape Head
- ◆ Roller working table
- ◆ 本机采用定速电机，使上下皮带输送速度一致，确保封箱工作的稳定。
- ◆ 皮带的张力、胶粘带的张力调整容易，可适用于软硬纸箱
- ◆ 封箱宽度及高度调整容易，以曲柄反手调整



AS923B

Bottom Sealer&Automatic Carton Filler

半自动封箱机&自动折底封箱机

Model/型号	AS923B
Conveyor speed/输送速度	16m/min.
Max.Packager size/最大包件尺寸	L500 × W450 × H570mm
Min.Packager size/最小包件尺寸	W150 × H120mm
Power supply/供给电源	110V,220-240V/50-60Hz
Power consumption/耗用功率	300W
Width of tape/胶带宽度	36mm,48mm,50mm,60mm
Machine size/机器尺寸	1720 × 820 × 1450mm
Machine weight/机器重量	180kg

FEATURES 特性

- ◆ 自动折底封箱机用人工撑开纸箱胚，自动折底盖，人工装箱后送入封箱机上下封箱，可单机作业或与自动生产线配套使用。
- ◆ 本封底机采用国际先进技术，并选用优质零部件、电器及气动元件
- ◆ 本产品可根据纸箱规格进行调节，适合多种规格同时使用，方便、快速，适应性强
- ◆ 本产品是现代化日用品、电子、玩具、印刷、五金、食品、服装、通信等大中型企业提高效率、节省成本的最佳选择之一。



Strapping&Wrapping Machine

捆扎机 & 缠绕膜机

STRAPPING&WRAPPING MACHINE
STRAPPING&WRAPPING MACHINE
STRAPPING&WRAPPING MACHINE
STRAPPING&WRAPPING MACHINE
STRAPPING&WRAPPING MACHINE
STRAPPING&WRAPPING MACHINE
STRAPPING&WRAPPING MACHINE
STRAPPING&WRAPPING MACHINE
STRAPPING&WRAPPING MACHINE
STRAPPING&WRAPPING MACHINE



SM06

Semi-Automatic Strapping Machine
半自动捆扎机

New Design
Option Color: sky-blue & white



SM06H



SM06T



SM06S

FEATURES 特性

- ◆ Standard accessory, it's advantage is stable quality, durable material, and easy maintenance.
- ◆ Special design-Control PP strap cooling time. It can macke the PP strap to fasten well in any time.
- ◆ "Electricity-saving" device, the motor automatically stops running at once after one cyile strap to reduce the normal wear and to prolong the machine life.
- ◆ Non-fast heater plate, it will increase the work efficiency. The advanced P.C.B microchip circuit board control system, less malfunction and easy maintenance.
- ◆ Installing an auxiliary feed/reset switch and tension adjust switch at the control panel makes you operate more conveniently.
- ◆ 瞬间加热：打开电源后5秒钟即可捆包作业
- ◆ 节电功能：机器停止捆扎工作即自动停机
- ◆ 可适用各种规格之PP带：可处理宽5-15mm，厚0.5-1.5mm的机用带
- ◆ 捆扎质量：包装带粘合精准、牢固
- ◆ 维修方便：主机芯一键式拆卸，简单，方便

Model/型号	SM06H/SM06T	SM06L/SM06S
Strapping tension/捆扎力	40-400N adjustable	40-400N adjustable
Strapping speed/捆扎速度	0.53Sec./Strap	0.53Sec./Strap
Strap width/机用带宽度	5-15mm	5-15mm
Power supply/供给电源	110V,220-240V/50-60Hz	110V,220-240V/50-60Hz
Power consumption/耗用功率	0.2KVA	0.2KVA
Machine size/机器尺寸	806X546X750mm	1360X546X590mm/490X350X800mm
Machine weight/机器重量	67kg/65kg	62kg/50kg

KZB

Semi-Automatic Strapping Machine
半自动捆扎机

KZB- I
Standard Model 标准型

Model/型号	KZB-I
Strapping tension/捆扎力	40-480N adjustable
Strapping speed/捆扎速度	1.8Sec./Strap
Strap width/机用带宽度	6-15mm
Power supply/供给电源	110V,220-240V/50-60Hz
Power consumption/耗用功率	0.34KVA
Machine size/机器尺寸	836X560X725mm
Machine weight/机器重量	85kg



KZB- II
Low Table Model 低台型

Model/型号	KZB-II
Strapping tension/捆扎力	40-480N adjustable
Strapping speed/捆扎速度	1.8Sec./Strap
Strap width/机用带宽度	6-15mm
Power supply/供给电源	110V,220-240V/50-60Hz
Power consumption/耗用功率	0.34KVA
Machine size/机器尺寸	1410X560X505mm
Machine weight/机器重量	80kg



KZBT
Table Model 桌上型



FEATURES 特性

Standard accessory, it's advantage is stable quality, durable material, and easy maintenance. Special design-Control PP strap cooling time. It can macke the PP strap to fasten well in any time. "Electricity-saving" device, the motor automatically stops running at once after one cyile strap to reduce the normal wear and to prolong the machine life. Non-fast heater plate, it will increase the work efficiency. The advanced P.C.B microchip circuit board control system, less malfunction and easy maintenance. Installing an auxiliary feed/reset switch and tension adjust switch at the control panel makes you operate more conveniently.

兄弟牌KZB系列半自动捆扎机以PP机用带为捆扎材料，主要用于商业、邮政、铁路、银行、食品、医药、书刊发行等行业的纸箱、木箱、纸包件、柳编箱、布包件的包装捆扎；在插入机用带后，机器能自动完成聚带、粘合、切断、出带的捆扎过程。

- ◆ 瞬间加热：打开电源后5秒钟即可捆包
- ◆ 可适用各种规格之PP带：可处理6-15mm的PP带
- ◆ 节电功能：机器停止捆扎工作后运行35秒即自动停机
- ◆ 捆扎质量：包装带粘合精准、牢固

SM10H

Semi-Automatic Strapping Machine

半自动捆扎机

Model/型号	SM10H/SM10T
Strapping tension/捆扎力	40-400N adjustable
Strapping speed/捆扎速度	0.53Sec./Strap
Strap width/机用带宽度	5-15mm
Power supply/供给电源	110V,220-240V/50-60Hz
Power consumption/耗用功率	0.2KVA
Machine size/机器尺寸	809X5206X760mm
Machine weight/机器重量	67kg/65kg



SM10T

Semi-Automatic Strapping Machine

半自动捆扎机

FEATURES 特性

- ◆ Standard accessory, it's advantage is stable quality, durable material, and easy maintenance.
- ◆ Special design-Control PP strap cooling time. It can macke the PP strap to fasten well in any time.
- ◆ "Electricity-saving" device, the motor automatically stops running at once after one ciyle strap to reduce the normal wear and to prolong the machine life.
- ◆ Non-fast heater plate, it will increase the work efficiency. The advanced P.C.B microchip circuit board control system, less malfunction and easy maintenance.
- ◆ Installing an auxiliary feed/reset switch and tension adjust switch at the control panel makes you operate more conveniently.
- ◆ 瞬间加热：打开电源后5秒钟即可捆包作业
- ◆ 节电功能：机器停止捆扎工作即自动停机
- ◆ 可适用各种规格之PP带：可处理宽5-15mm，厚0.5-1.5mm的机用带
- ◆ 捆扎质量：包装带粘合精准、牢固
- ◆ 维修方便：主机芯一键式拆卸，简单，方便



AP8040/AP8060

Automatic Strapping Machine

全自动捆扎机

Standard Model 标准型

Model/型号	AP8040/AP8060
Strapping tension/捆扎力	40-600N adjustable
Strapping speed/捆扎速度	2.18Sec./Strap
Strap width/机用带宽度	9、12、15mm
Arch size/框架尺寸	800 × 400/600mm
Power supply/供给电源	380V/50-60Hz
Power consumption/耗用功率	0.5KVA
Machine size/机器尺寸	1100 × 600 × 1520/1540mm
Machine weight/机器重量	170/180kg



AP8060L

Automatic Strapping Machine

全自动捆扎机

Full Automatic Model 全自动型

Model/型号	AP8060L
Strapping tension/捆扎力	100-600N adjustable
Strapping speed/捆扎速度	2.18Sec./Strap
Strap width/机用带宽度	9、12、15mm
Arch size/框架尺寸	800 × 600mm
Power supply/供给电源	380V/50-60Hz
Power consumption/耗用功率	0.5KVA
Machine size/机器尺寸	1580 × 660 × 1410mm
Machine weight/机器重量	250kg

FEATURES 特性

- ◆ Rapid speed: 2.0sec/per cycle, 30cycles/per min
 - ◆ Easy Maintenance: No Greasing, Mechanism is stable and durable, Easy operation
 - ◆ Tension Adjustment: Can be adjustable at well, Max. Tension is over 90kgs
 - ◆ Precision Structure: Main machine's component is made of aluminum alloy. Control System is compatible
 - ◆ Add on a safety device, built for 24 hrs continuous operation
 - ◆ Easy loading or unloading: To load or unload the strapping roll is convenient due to the dispenser is placed outside
 - ◆ Extensive applications: Can be independent operation or combine with other machines for unmanned
 - ◆ Electric appliance adopted: "MITSUBISHI" PLC control, and "ORMON" photoelectric switch control(AP8060)
 - ◆ Optional: any arch size
- Ap系列全自动捆扎机具有机械制造精确度高、结构严谨、打包牢固、速度快、故障率低、寿命长等优点，可使用超薄机带(0.6~0.7mm)厚。可配流水线作业使用。



APM8060C

Automatic Strapping Machine
全自动捆扎机

Standard Model 标准型
Middle Type With Driving Force 中台动力型

Model/型号	APM8060C
Strapping tension/捆扎力	40-600N adjustable
Strapping speed/捆扎速度	2.18Sec./Strap
Strap width/机用带宽度	9、12、15mm
Arch size/框架尺寸	800 × 600mm
Power supply/供给电源	380V/50-60Hz
Power consumption/耗用功率	0.5KVA
Machine size/机器尺寸	1750 × 660 × 1340mm
Machine weight/机器重量	180kg



APM80120

Automatic Strapping Machine
全自动捆扎机

Full Automatic Model 全自动型

Model/型号	APM80120
Strapping tension/捆扎力	100-600N adjustable
Strapping speed/捆扎速度	2.18Sec./Strap
Strap width/机用带宽度	9、12、15mm
Arch size/框架尺寸	800 × 1200mm
Power supply/供给电源	380V/50-60Hz
Power consumption/耗用功率	0.5KVA
Machine size/机器尺寸	1750 × 660 × 1940mm
Machine weight/机器重量	220kg



FEATURES 特性

- ◆ Rapid speed: 2.0sec/per cycle, 30cycles/per min
- ◆ Easy Maintenance: No Greasing, Mechanism is stable and durable, Easy operation
- ◆ Tension Adjustment: Can be adjustable at well, Max. Tension is over 90kgs
- ◆ Precision Structure: Main machine's component is made of aluminum alloy. Control System is compatible
- ◆ Add on a safety device, built for 24 hrs continuous operation
- ◆ Easy loading or unloading: To load or unload the strapping roll is convenient due to the dispenser is placed outside
- ◆ Extensive applications: Can be independent operation or combine with other machines for unmanned
- ◆ Electric appliance adopted: "MITSUBISHI" PLC control, and "ORMON" photoelectric switch control(AP8060)
- ◆ Optional: any arch size

Ap系列全自动捆扎机具有机械制造精确度高、结构严谨、打包牢固、速度快、故障率低、寿命长等优点，可使用超薄机带(0.6~0.7mm)厚。可配流水线作业使用。

AP8060C

Automatic Strapping Machine
无人化自动捆扎机

Model/型号	AP8060C
Strapping tension/捆扎力	40-600Nadjustable
Strapping speed/捆扎速度	2.18Sec./Strap
Strap width/机用带宽度	9、12、15mm
Arch size/框架尺寸	800 × 600mm
Power supply/供给电源	380V/50-60Hz, 220V
Power consumption/耗用功率	0.9KVA
Machine size/机器尺寸	1120 × 630 × 1540mm
Machine weight/机器重量	220kg



AP12040C

Automatic Strapping Machine
无人化自动捆扎机

Model/型号	AP12040C
Strapping tension/捆扎力	40-600N adjustable
Strapping speed/捆扎速度	2.18Sec./Strap
Strap width/机用带宽度	9、12、15mm
Arch size/框架尺寸	1200 × 400mm
Power supply/供给电源	380V/50-60Hz, 220V
Power consumption/耗用功率	0.9KVA
Machine size/机器尺寸	1500 × 630 × 1340mm
Machine weight/机器重量	280kg



FEATURES 特性

- ◆ Rapid speed: 2.0sec/per cycle, 30cycles/per min
- ◆ Easy Maintenance: No Greasing, Mechanism is stable and durable, Easy operation
- ◆ Tension Adjustment: Can be adjustable at well, Max. Tension is over 90kgs
- ◆ Precision Structure: Main machine's component is made of aluminum alloy. Control System is compatible
- ◆ Add on a safety device, built for 24 hrs continuous operation
- ◆ Easy loading or unloading: To load or unload the strapping roll is convenient due to the dispenser is placed outside
- ◆ Extensive applications: Can be independent operation or combine with other machines for unmanned
- ◆ Electric appliance adopted: "MITSUBISHI" PLC control, and "ORMON" photoelectric switch control(AP8060)
- ◆ Optional: any arch size

Ap系列全自动捆扎机具有机械制造精确度高、结构严谨、打包牢固、速度快、故障率低、寿命长等优点，可使用超薄机带(0.6~0.7mm)厚。可配流水线作业使用。



WG-22XN

Automatic Strapping Machine

全自动捆扎机

Stand Model 标准型

Model/型号	WG-22XN
Strapping tension/捆扎力	40-600N adjustable
Strapping speed/捆扎速度	2.05Sec./Strap
Strap width/机用带宽度	8-19mm
Arch size/框架尺寸	800 × 600mm
Power supply/供给电源	380V/50-60Hz,220V
Power consumption/耗用功率	0.85KVA
Machine size/机器尺寸	1410 × 600 × 1540mm
Machine weight/机器重量	250kg



DBA-130A

Automatic Strapping Machine

全自动捆扎机

Vertical Model 立式半自动型

Model/型号	DBA-130A
Strapping tension/捆扎力	100-600N adjustable
Strapping speed/捆扎速度	2.0Sec./Strap
Strap width/机用带宽度	9-15mm
Chute size/轨道尺寸	L1000mm
Power supply/供给电源	110,220V/50-60Hz
Power consumption/耗用功率	0.5KVA
Machine size/机器尺寸	1860 × 560 × 1500mm
Machine weight/机器重量	140kg



FEATURES 特性

- ◆ Rapid speed: 2.0sec/per cycle, 30cycles/per min
 - ◆ Easy Maintenance: No Greasing, Mechanism is stable and durable, Easy operation
 - ◆ Table Height: 450mm(customer-made height is available)
 - ◆ Easy loading or unloading: To load or unload the strapping roll is convenient due to the dispenser is placed outside
 - ◆ Packing type: Parallel 1 to several strips, in type of orders to pack, manual operation, continual packing, ball switch & pedal switch.
 - ◆ Electric appliance adopted: "LG" PLC control, and "TE" and Japanese"Omron"and"ZIK"(AP8060L)
 - ◆ Easy strap feeding through pallet(DBA-130A)
 - ◆ Eliminates troublesome by hand tool(DBA-130A)
 - ◆ Optional: any arch size(AP8060L), Chute size L1200mm or Longer one(DBA-130A)
- 选配功能：任意框架尺寸(AP8060L)，1200mm长的轨道或更长的尺寸(DBA-130A)

BL

Pallet Stretch Wrapping Machine

自动薄膜缠绕机

BL-2000A

Standard Model 标准型

Without Pre-stretch type 阻拉伸型自动薄膜缠绕机

- ◆ Adopting programmable control(frequency converter), reliable in performance, convenient in operation; the lapping type and time can be designed on custommers'requirements.
- ◆ Equipped with a photoelectric detector, antomatically testing the goods height and controlling the traval limit
- ◆ Rotary table can reset automatically, thus ensuring correctin-and out position of the tray
- ◆ Convenient in film roll replacement, LLDPE film with outside diameter≤280mm, width≤500mm and paper core 76mm can be used
- ◆ Custom-made specification is available and also providing a complet set of packing system of conveying line
- ◆ 采用可编程控制及变频器控制，性能可靠，操作方便，可根据需要设计缠绕方式和次数
- ◆ 具有行程限位控制，或光电控头，自动测定货物高度
- ◆ 转—自动复位，确保托盘进出定位准确
- ◆ 薄膜换卷方便，可使用外径口280mm，宽度口500mm，纸芯76mm的LLDPE薄膜
- ◆ 特殊规格可定制，并可提供成套的输送线包装系统



BL-2000P

Pre-Stretch Model 预拉伸型

With Pre-stretch type 预拉伸型自动薄膜缠绕机

- ◆ Adopting programmable control(frequency converter), reliable in performance, convenient in operation; the lapping type and time can be designed on custommers'requirements.
- ◆ Equipped with a photoelectric detector, antomatically testing the goods height and controlling the traval limit
- ◆ Rotary table can reset automatically, thus ensuring correctin-and out position of the tray
- ◆ Convenient in film roll replacement, LLDPE film with outside diameter≤280mm, width≤500mm and paper core 76mm can be used
- ◆ Custom-made specification is available and also providing a complet set of packing system of conveying line
- ◆ Percent of pre-stretch: 250%
- ◆ 采用可编程控制及变频器控制，性能可靠，操作方便，可根据需要设计缠绕方式和次数
- ◆ 具有行程限位控制，或光电控头，自动测定货物高度
- ◆ 转—自动复位，确保托盘进出定位准确
- ◆ 薄膜换卷方便，可使用外径口280mm，宽度口500mm，纸芯76mm的LLDPE薄膜
- ◆ 特殊规格可定制，并可提供成套的输送线包装系统
- ◆ 薄膜预拉比例为25%



BL-2000B

Top Press Model 加压型

With Top Press type 加压型自动薄膜缠绕机

Model/型号	BL2000A/BL2000P/BL2000B
Power supply/电源电压	1Phase 220V/50Hz or 3 phase 380V/50Hz 1.25KW
Turn-table Diameter/转盘自径	φ1500mm(φ1650mm&φ2000mm are option)
Turn-table thickness/转盘厚度	85mm
Speed of turn-table/转盘转速	0-12r/min.
Turn-table loading/转盘载重	220kgs
Percent of Pre-stretch/预拉伸比	250%
Machine color/机器颜色	Blue/yellow or Gray/Blue



YK1800FR-PL

Online-stretch Wrapping Machine

摇臂式在线缠绕机



Model/型号	YK1800FR-PL
Line Table Height/线体台面高度	600mm
Max Packing Size/最大包装尺寸	1200×1200×1800mm
Stretch Speed/悬臂旋转速度	0-15rpm
Total Power/总功率	2000W
Power Supply/供给电源	220V/380V
Air Pressure/气压	4~6kg/cm
Working Speed/工作速度	40件/小时
Machine Weight/机器重量	1500kg

FEATURES 特性

整条包装流水线由单机构成，单机品质的好坏，决定了整条流水线是否能够稳定高效的运行。我公司为贵公司提供的各项单机，主要部件全部采用进口知名品牌。使整条流水线操作简便，性能稳定，高效低耗。

- ◆ 控制系统：
PLC程序控制自动设定缠绕层数和次数光电开光，自动感测货物高度
- ◆ 悬臂驱动系统：
变频调速，0~15rpm转可调,悬臂位置自动复位由安全光电探测器控制的高灵敏度紧急停车系统
- ◆ 薄膜系统：
预拉伸可达250%，自动送膜，送膜速度可调
特殊耐刀割橡胶导棍
顶部及底部缠绕数分别单独控制
膜架升降采用双导轨导向传动，升降速度可调
- ◆ 包装方式：摇臂在线式拉伸膜缠绕包装，自动断膜、自动上膜。

全自动在线穿箭式打包

online-strapping machine



Model/型号	A-72AO
Machine Size/机器尺寸	4125x720x2485mm
Frame Size/弓架尺寸	1600(W)x1450mm(H)
Strapping Speed/捆包速度	15秒/条
Package Size/包装物大小	1000-1500 (W)±500-1400 (H) mm
The Tighten Of Strapping/捆包紧度	最大70kg
The Widen Of Pp,pet Film/pp、pet带宽	12、15、19mm
Power Supply/电源	220/380V. 50/60HZ

FEATURES 特性

- ◆ 针对栈板捆包而设计的打包机，开放式弓架、活动的穿带能将栈板与捆包物牢固的捆包在一起便于移动及运输，可搭配滚筒线使用。
- ◆ 全自动穿剑打包机性能：
 - 1.PLC控制；
 - 2.主机心脏移动行程达250mm；
 - 3.可预设多种捆包模式；
 - 4.送带未到位自动检知警示；
 - 5.捆包失败自动检知警示；
 - 6.缺带自动检知警示；
 - 7.PP或PET带均适用；
 - 8.适合搭配无人化自动包装输送系统

Palletizing

码垛托盘包装

PALLETIZING
PALLETIZING
PALLETIZING
PALLETIZING
PALLETIZING
PALLETIZING
PALLETIZING



YCMD40

High-position Palletizer
高床码垛机




FEATURES 特性

- ◆ 采用侧进箱方式，占地面积小，简化码垛机前的输送系统，整机比机器人码垛节省50%成本。
- ◆ 地位码垛式，国际先进逐层式码垛设计理念，结构更先进，动作更轻便平稳，功耗也较小。
- ◆ 采用plc程序控制，及变频调速，纸箱输送、排序、堆栈板、实操输出等可自动化实现；
- ◆ 整机安全性极高及强大的诊断功能，多项安全设计及故障即时显示功能，保障人身安全，维修的快捷和简便。
- ◆ 堆垛方式的调整方便、简单，可在人机界面上进行。故障无需更换堆垛零件即可以完成几种堆垛方式。
- ◆ 可实现纸箱码垛或收缩包装产品的码垛。

Model/型号	YCMD40
Production ability/生产能力	40箱/分
Power/功率	10（千瓦kw）
Working air pressure/工作气压	0.6~0.8Mpa
Machine size/机型尺寸	L8000×W5200×H3200mm
Max height of palletizing/最大堆码高度	1800mm
Max weight of palletizing/最大堆码重量	1600kg

机器人码垛

Robotic Palletizer

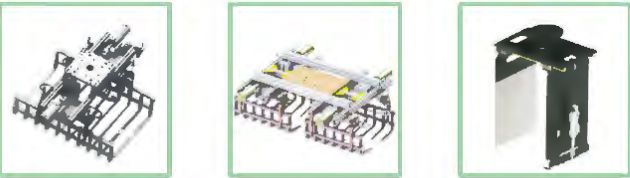

Model/型号	机器人码垛
Power supply/动力电源	220/380V; 50HZ
Control power/控制电压	24V DC
Air pressure/压缩空气	0.5Mpa
Air consuming/耗气量	110L/min
Power/功率	6.5kw
Style of opecation/驱动方式	伺服电机驱动

伺服码垛

Servo Palletizer

直角坐标型

Model/型号	SP-I
Carton size/纸箱尺寸	MIN L260×W180×H140mm MAX L650×W550×H400mm
Palletizing speed/码箱速度	5箱/分钟
External size/机械尺寸	4600×2350×2000mm
Pallet size/栈板尺寸	1300×1300×1400mm
Applicable power supply/适用电源	200V/380V 50Hz
Applicable gas source/适用气源	0.4-0.6Mpa
Applicable power/消耗功率	7.5KW
Machine weight/机台重量	2600KG

FEATURES 特性

- ◆ 机器人强大的运算功能，高精度作业，可以实现快速装箱、码垛、拆垛工作。
- ◆ 生产线中，进行装箱、码垛、拆垛作业的机器人码垛可以灵活布局，可以同时码垛两条线或者多条线是生产线末端进行码垛作业的理想之选。
- ◆ 伺服电机、可编程控制器、变频调速控制器采用品质一流的产品，确保了系统硬件的可靠性和长寿命。
- ◆ 高品质的硬件和由专家设计的专门控制软件相组合，实现了系统高度的自动化。完善的安全联锁机制，可以对设备和操作人员提供保护。
- ◆ 我们卓越的技术、稳定可靠的产品和完善的服务，全面提高工厂自动化水平。



Shrink Machine

收缩机

SHRINK MACHINE
SHRINK MACHINE
SHRINK MACHINE
SHRINK MACHINE
SHRINK MACHINE
SHRINK MACHINE
SHRINK MACHINE
SHRINK MACHINE



FQL450LB+BSD4020A

Automatic Carton Packing Line

封切收缩包装机

无人化自动型

详情请查看后部的单机介绍
All Specification as follow machine details
热收缩包装机: BSD3520A/BSD4020A
BSD4525A



- ◆ Temperature compensating solid state controllers
- ◆ Belt conveyor with variable speed and adjustable
- ◆ Top & side heat, Stainless-steel heater
- ◆ Quick change seal wire with tension assembly
- ◆ Double Magnetic Hold-down; Sealing blade on top(L-sealer)
- ◆ Roller, wire mesh optional
- ◆ High velocity turbo-tunnel
- ◆ Combination unit-system runs on one circuit
- ◆ Works with all types of shrink films, but specially tunnel for non-PVC, polyolefin films

L型封切刀, 使收缩膜包装一次封切成型, 镀特氟龙不粘层封口布, 封切不粘膜, 且封口整齐不开裂, 产品经封切后自动输送至收缩炉, 进行收缩包装; BSD系列收缩包装机采用欧美先进螺旋风技术, 收缩效率特佳, 输送链轮采用外套硅胶, 不会烫坏包装物, 彻底解决底部难收缩的困扰; 此套设备特别适用于软件、印刷品、饼干、制药、陶瓷、饮料及地板等行业的大批量收缩包装。

BSD4020A+FQL450A

Automatic Carton Packing Line

封切收缩包装机

技术领先型

详情请查看后部的单机介绍
All Specification as follow machine details
L型封切机: FQL400A/FQL450A/FQL450T/FQL400LA
热收缩包装机: BSD3520A/BSD4020A
BSD4525A
PE膜收缩包装机: BSE4530/BSE5045/BSE6050
BSE4530A/BSE5045A
BSE6040A/BSE6050A
袖口式封切机: ST6040/ST6040AF/ST6040AH
另外, 我司可按用户的要求制作各种尺寸



BSD350/400/450

Thermal-Shrink Packing Machine

热收缩包装机

石英灯管型

Model/型号	BSD350	BSD400	BSD450
Power supply/电源电压	220-240V/50Hz		380-415V/50Hz
Heater power/加热管功率	6.5KW Adjustable	6.5KW Adjustable	8KW Adjustable
Conveyor speed/输送速度	0-10m/min.	0-10m/min.	0-10m/min.
Tunnel size/收缩炉尺寸	83x35x15cm	83x40x20cm	83x45x25cm
Shink product size/产品尺寸	300x100mm	350x150mm	400x200mm
Conveyor loading/输送载量	5kg Maximum	5kg Maximum	10kg Maximum
Tunnel temperature/炉温度	200℃ Maximum	200℃ Maximum	200℃ Maximum
Machine size/机器尺寸	105x55x110cm	120x60x115cm	120x69x120cm
Machine weight/机器重量	75kg	90kg	100kg



BSD400B/450B

Thermal-Shrink Packing Machine

热收缩包装机

不锈钢散热型

Model/型号	BSD400B	BSD450B
Power supply/电源电压	220-240V/50Hz	380-415V/50Hz
Heater power/加热管功率	6.5KW Adjustable	8KW Adjustable
Conveyor speed/输送速度	0-10m/min.	0-10m/min.
Tunnel size/收缩炉尺寸	83x40x20cm	83x45x25cm
Shink product size/产品尺寸	350x150mm	400x200mm
Conveyor loading/输送载量	5kg Maximum	10kg Maximum
Machine size/机器尺寸	120x64x124cm	120x69x129cm
Machine weight/机器重量	80kg	100kg



FEATURES 特性

- ◆ Compact construction, High efficiency
- ◆ The use of intra-red Quartz heater tube results in lower the power consumption
- ◆ Great air-flow provides excellent heat distribution for an even shrink
- ◆ Temperature meter control temperature
- ◆ Automatic Temperature Control: The system features automatic temperature variation for convenient operation
- ◆ Variable speed live-roller(mesh) conveyor is easily adjusted
- ◆ Compact construction, High efficiency
- ◆ Stainless-steel heater
- ◆ Top & bottom & side heating
- ◆ Digital temperature controllers
- ◆ Roller, wire mesh, options

BSD系列热收缩包装机采用石英远红外管加热，电子无级变速自动调温，固态继电器控制，稳定可靠、低噪音、寿命长。包装之后的产品能密封、防潮、防撞击，适用于多件物品裹紧包装和托盘包装。

FQL450T

Automatic L-Bar Sealer

自动封切机

气动型

Model/型号	FQL450T
Power supply/电源电压	110,220-240V/50-60Hz
Seal size/封切尺寸	580x450mm
Product size/产品尺寸	L560xW420mm
Conveyor loading/输送载量	25kg Max.
Machine size/机器尺寸	145x70x100cm
Machine weight/机器重量	120kg
Shrink film/适用收缩膜	POF,PVC,PE



FQL450LB

Automatic L-Bar Sealer

自动封切机

全自动气动型

Model/型号	FQL450LB
Power supply/电源电压	110,220-240V/50-60Hz
Seal size/封切尺寸	560x450mm
Product size/产品尺寸	L520xW410mm
Conveyor loading/输送载量	20kg Max.
Machine size/机器尺寸	1600x835x1470mm
Machine weight/机器重量	280kg
Shrink film/适用收缩膜	POF



FEATURES 特性

- ◆ Power belted discharge conveyor.
- ◆ Dual magnet clamping.
- ◆ Pin per feration hold punch.
- ◆ Variable dwell seal time.
- ◆ Variable conveyor time.
- ◆ Seal head return cyinder..
- ◆ Locking caster.
- ◆ Heating line over heat compensator protection.
- ◆ 动力皮带，封切后自动输送入收缩机
- ◆ 双电磁铁支撑
- ◆ 工作台高度可以根据需要调节
- ◆ 摆臂气动控制，经久耐用
- ◆ 电热封切带过载保护功能

This machine is used for sealing, cutting and bag making of various types of imported and domestic PE, PVC, POF contraction films, featurssafety, reaibility, easy operation, quick heat sealing, fine and soild sealed appear-ance and long nonstop operation. It can work drriciently along with the BSD series constant temperature antomatic contraction oven to meet the requirement of batch production. 本机适用于PE、PVC、POF等多种进口、国产品收缩膜的封切、制袋、具有安全可靠、操作简便、热合快捷、封口美观牢固等优点，且可长时间连续工作、适合与BSD系列恒温自动收缩炉配套使用，高效快捷，能满足大批量生产。

BSD3520A/4020A/4525A

Thermal-Shrink Packing Machine
热收缩包装机&封切机

内循环型

Model/型号	BSD3520A	BSD4020A	BSD4525A
Power supply/电源电压	110,220-240V/50-60Hz 1 φ		380V/50Hz 3 φ
Heater power/加热管功率	6.5KW Adjustable	6.5KW Adjustable	8KW Adjustable
Conveyor speed/输送速度	0-15m/min.	0-15m/min.	0-15m/min.
Tunnel size/收缩炉尺寸	80x35x20cm	100x40x20cm	100x45x25cm
Shink product size/产品尺寸	300x160mm	350x160mm	400x210mm
Conveyor loading/输送载量	15kg Maximum	25kg Maximum	25kg Maximum
Machine size/机器尺寸	105x61x132cm	125x66x132cm	125x71x137cm
Machine weight/机器重量	80kg	90kg	120kg
Shrink film/适用收缩膜	POF,PVC, PP		



FQL450A

Thermal-Shrink Packing Machine
热收缩包装机&封切机

标准型

Model/型号	FQL450A
Power supply/电源电压	1 Phase 110,220-240V/50-60Hz
Conveyor speed/输送速度	0-15m/min.
Seal size/封切尺寸	600x450cm
Shink product size/产品尺寸	L580xW420cm
Conveyor loading/输送载量	25kg Max
Machine size/机器尺寸	145x67x100cm
Machine weight/机器重量	110kg
Shrink film/适用收缩膜	POF,PVC, PP, PE



FEATURES 特性

- ◆ Works with all types of shrink films, but specially tunnel for non-PVC, polyolefin films
- ◆ Temperature compensating solid state controllers
- ◆ Belt conveyor with variable speed and adjustable
- ◆ Top & side heat, Stainless-steel heater
- ◆ Quick change seal wire with tension assembly
- ◆ Double Magnetic Hold-down; Sealing blade on top(L-sealer)
- ◆ Roller, wire mesh optional
- ◆ High velocity turbo-tunnel
- ◆ Combination unit-system runs on one circuit

L型封切刀，使收缩膜包装一次封切成型，镀特氟龙不粘层封口布，封切不粘膜，且封口整齐不开裂，产品经封切后自动输送至收缩炉，进行收缩包装；BSD系列收缩包装机采用欧美先进螺旋风技术，收缩效率特佳，输送链轮采用外套硅胶，不会烫坏包装物，彻底解决底部难收缩的困扰；此套设备特别适用于软件、印刷品、饼干、制药、陶瓷、饮料及地板等行业的大批量收缩包装。

BTV+BLA

Shrink Packing System
封切收缩包装机

FEATURES 特性

- ◆ Works with all types of shrink films, but specially tunnel for non-PVC, polyolefin films
- ◆ Temperature compensating solid state controllers
- ◆ Belt conveyor with variable speed and adjustable
- ◆ Top & side heat, Stainless-steel heater
- ◆ Quick change seal wire with tension assembly
- ◆ Double Magnetic Hold-down; Sealing blade on top(L sealer)
- ◆ Sealing blade on top(L sealer)
- ◆ Roller, wire mesh optional
- ◆ High velocity turbo-tunnel
- ◆ Combination unit-system runs on one circuit

L型封切刀，使收缩膜包装一次封切成型，镀特氟龙不粘层封口布，封切不粘膜，且封口整齐不开裂，产品经封切后自动输送至收缩炉，进行收缩包装；BTV系列收缩包装机采用欧美先进螺旋风技术，收缩效率特佳，输送链轮采用外套硅胶，不会烫坏包装物，彻底解决底部难收缩的困扰；此套设备特别适用于软件、印刷品、饼干、制药、陶瓷、饮料及地板等行业的大批量收缩包装。



BTV4525/4540

内循环型

Model/型号	BTV4525	BTV4540
Power supply/电源电压	110,220-240V,380V/50-60Hz 1 φ	
Heater power/加热管功率	6x1.4KW Adjustable	6x1.4KW Adjustable
Conveyor speed/输送速度	0-15m/min.	0-15m/min.
Tunnel size/收缩炉尺寸	80x45x25cm	80x45x40cm
Shink product size/产品尺寸	400x210mm	400x360mm
Conveyor loading/输送载量	30kg Maximum	30kg Maximum
Machine size/机器尺寸	140x92x160cm	140x92x175cm
Machine weight/机器重量	260kg	290kg
Shrink film/适用收缩膜	POF,PVC, PP	



BLA6040/8060

气动封切型

Model/型号	BLA6040	BLA8060
Power supply/电源电压	1 Phase 110,220-240V/50-60Hz	
Conveyor speed/输送速度	0-15m/min.	0-15m/min.
Seal aize/封切尺寸	600x400mm	800x600mm
Shink product size/产品尺寸	L550xW380mm	L750xW520mm
Conveyor loading/输送载量	25kg Max	25kg Max
Machine size/机器尺寸	155x86x90cm	195x108x90cm
Machine weight/机器重量	230kg	250kg
Shrink film/适用收缩膜	POF,PVC, PP, PE	



FM5540

2 IN 1 Shrink Packaging Machine
二合一收缩包装机

FM5540 with feedout conveyor 标准型

Model/型号	FM5540
Power supply/电源电压	110,220-240V/50-60Hz
Power/功率	4.0KW
Max.Packing size/最大包装尺寸	L550xW400xH300mm
Max.Sealing size/最大封口尺寸	L550xW400
Working efficiency/工作效率	500-800pcs/h.
Machine size/机器尺寸	1360x670x1080mm
Machine weight/机器重量	125kg/145kg



FEATURES 特性

- ◆ Integrated sealing and shrinking; One step to complete the entire process
- ◆ High transparent glass cement hood, making sealing & shrink processes fully invisible
- ◆ Improted PITFE thermostable ceramic cutter holder, free from burns or damage after long-term use
- ◆ With stainless-steel or aluminum conveyor (FM5540A)
- ◆ Suitable for such shrink film as PVC, POF and PP

FM系列二合一热收缩包装机以POF、PP、PVE收缩膜为材料，集封口各收缩于一体，只须一个人工作便可完成封口和收缩作业，且降低了功率的消耗，广泛应用于饮料、礼品、五金、化妆品、玩具、塑胶、竹木的产品的外包装。

BSE4530/5045/6050

PE FILM Shrink Packing Machine
PE膜热收缩包装机

Model/型号	BSE4530	BSE5045	BSE6050
Power supply/电源电压	3Phase 220V,380-460V/50-60Hz		
Heater power/加热管功率	20KW Adjustable	24KW Adjustable	28KW Adjustable
Conveyor speed/输送速度	0-10m/min.	0-15m/min.	0-15m/min.
Tunnel size/收缩炉尺寸	120x45x30cm	150x50x45cm	180x60x50cm
Shink product size/产品尺寸	260x200mm	400x350mm	500x400mm
Conveyor loading/输送载量	15kg Max	35kg Max	30kg Max
Machine size/机器尺寸	215x69x140cm	245x74x155cm	275x84x160cm
Machine weight/机器重量	200kg	260kg	300kg
Shrink film/适用收缩膜	PE,POF,PVC,PP		

FEATURES 特性

- ◆ Works with all kinds of shrink film
- ◆ Digital temperature controllers
- ◆ Top & bottom & side heating
- ◆ Variable speed belt conveyor
- ◆ Automatic cool down timer(increases life span)
- ◆ Roller, wire mesh, options
- ◆ 适用于各种热收缩膜
- ◆ 数字式温度表控制温度
- ◆ 上部&下部&侧部均有加热管
- ◆ 输送速度可根据收缩效果及产量要求调节
- ◆ 可选择网式，链式输送带



BSE4530A

PE FILM Shrink Packing Machine
PE膜热收缩包装机

Model/型号	BSE4530A
Power supply/电源电压	3PHase 220V,380-460V/50-60Hz
Heater power/加热管功率	11KW Adjustable
Conveyor speed/输送速度	0-15m/min.
Tunnel size/收缩炉尺寸	120x45x30cm
Shink product size/产品尺寸	350x250mm
Conveyor loading/输送载量	25kg Max.
Machine size/机器尺寸	215x69x140cm
Machine weight/机器重量	230kg
Shrink film/适用收缩膜	PE,POF,PVC,PP



BSE5045A/6050A

PE FILM Shrink Packing Machine
PE膜热收缩包装机

Option Color:sky-blue & black

Model/型号	BSE5045A	BSE6050A
Power supply/电源电压	3Phase 220V,380-460V/50-60Hz	
Heater power/加热管功率	15KW Adjustable	24KW Adjustable
Conveyor speed/输送速度	0-15m/min.	0-15m/min.
Tunnel size/收缩炉尺寸	150x50x45cm	180x60x50cm
Shink product size/产品尺寸	400x350mm	500x400mm
Conveyor loading/输送载量	35kg Max.	30kg Max.
Machine size/机器尺寸	245x74x155cm	275x84x160cm
Machine weight/机器重量	260kg	300kg
Shrink film/适用收缩膜	PE,POF,PVC,PP	



FEATURES 特性

- ◆ High velocity-turbo tunnel design
- ◆ Works with all kinds of shrink film
- ◆ Digital temperature controllers
- ◆ Stainless steel heater
- ◆ Top & bottom & side heating
- ◆ Variable speed belt conveyor
- ◆ Automatic cool down tiner(increases life span)
- ◆ Roller, wire mesh, options
- ◆ Safeguard cover of heat insulation
- ◆ 全封闭加热内循环式
- ◆ 施耐德变频调速马达，确保运输平稳
- ◆ 适用于各种热收缩膜
- ◆ 数字式温度表控制温度
- ◆ 上部&下部&侧部均有加热管
- ◆ 输送速度可根据收缩效果及产量要求调节
- ◆ 可选择网式，链式输送带
- ◆ 输送滚轴带自转功能，确保产品的底部收缩效果

BSL-100M/200M

BSL-100M/200M Shrink Labelling Machine
自动套标机

FEATURES 特性

BSL-100M type is a kind of low-speed machine, but it adopts equivalent PLC, positioning module, servo motor and frequency converter. Besides, its touch screen is featured with a humanized operation. It adopts PLC programmable controller, imported servo motor, servo driver, frequency converter and transducer; besides, it adopts the positioning module to ensure the casting label precise, rapid and stable.

- ◆固定式料架：无安全后顾之忧。
- ◆同步标签刷下组：套标精度更加准确。
- ◆人机显示屏：操作更人性化。
- ◆带瓶定位系统：特殊定位皮带，动力传导确实。
- ◆分瓶螺杆：瓶子输送不易晃动。
- ◆可调试刀盘：独创回旋切断，双面刀刃，寿命最久。
- ◆中心导柱：简易更换和稳定的架构，标签导送稳定更耐久。
- ◆标签控制电眼架：独创尾翼与电眼结合，提高膜料切断精度。
- ◆全罩式不锈钢外罩和铝合金主机：使操作者更安全作业，全机防水不生锈。



标准型

Model/型号	BSL-100M	BSL-200M
Power voltage/电压	AC220V,50/60HZ	AC220V,50/60HZ
Power/功率	1.5KW	2KW
Applicable Diameter of Bottle Body /适用瓶子直径	Φ28 mm-Φ125mm	Φ28 mm-Φ125mm
Applicable Length of Label/适用标签长度	30 mm ~ 250mm	30 mm ~ 250mm
Applicable Thickness of Label/适用标签厚度	0.03 mm ~ 0.13 mm	0.03 mm ~ 0.13 mm
Applicable Materials of Label /适用标签材料	PVC,PET,OPS	PVC,PET,OPS
Standard label length/标准标签长度	100mm	100mm
Production Speed /生产速度	100 bottles/min	200 bottles/min
Dimension/外型尺寸	2100mm×850mm×2000mm	2100mm×850mm×2000mm
Machine weight/机器重量	300Kg	300Kg

◆Production speed varies with clients' needs; Labels shorter, the production speed higher / 生产速度随客户的需求;标签短,生产速度高。

BSD1535ST

Thermal-Shrink Packing Machine
热收缩包装机

Steam Tunnel 蒸汽收缩机

Model/型号	BSD1535ST
Power supply/电源电压	3Phase 220V,380/50-60Hz
Fans Power/风机功率	0.37KW
Steam Pressure蒸汽压力	0.15-0.4Mpa
Steam Consumption蒸汽耗量	20-100KG/H
Tunnel Size/ 收缩炉尺寸	1800x150x350 mm
Size/外型尺寸	2000 × 570 × 1600mm



FEATURES 特性

套标机所配套使用的蒸汽缩标机无论内部管道还是外壳均采用进口优质不锈钢制作,完全满足食品工厂的要求。本缩标机的蒸汽喷出位置将根据贵公司的产品特性进行单独设计,可以自由调整方向和流量,以保证收缩后的标纸表面平整无褶皱,并且标签紧密地附着在瓶身不脱落。

BSD1535

Thermal-Shrink Packing Machine
热收缩包装机

Label Shrink 标签收缩机

Model/型号	BSD1535S
Power Supply/电源电压	220V/50HZ
Power/功率	4KW
Speed/输送速度	0-4m/min.
Tunnel Size/收缩炉尺寸	700 × 150 × 350mm
Shrink Film/适用收缩膜	5kg PE,POF,PVC,PP
Size/机器尺寸	1800 × 580 × 800mm
Machine weight/机器重量	85kg



FEATURES 特性

- ◆收缩温度随意控制，最高温度可达250℃
- ◆输送速度由电子调速器无级调速
- ◆只加热瓶口部分，不会因高温而影响瓶内物体的品质
- ◆整机采用高强度碳钢，表面经优质处理
- ◆双台小功率运风电机，涡轮运风，不会导致标签移位，变形

- ◆只需通过简单的设定和调整，即可适应各种规格的瓶型
- ◆只针对产品的局部加热，最大的节省热能
- ◆本机可以单机生产也可连接生产线作业
适用于食品、饮料、药品、化妆品、农药等行业的玻璃瓶塑料瓶、纸杯等容器，套标后的瓶身或杯身标 签热收缩。

ASS500LB+ BTV4530L

Side sealing & high speed of automatic shrink packaging machine

全自动高速边封热收缩包装机

FEATURES 特性

- ◆ Constant heated sealing blades can perform continuously which enables no limit of product length and high capacity
恒温封切，连续工作，包装产品长度不限，包装速度最高可达60包/分钟；
- ◆ Auto photocell infeed system provides both horizontal and vertical choices to suit various product size.
光眼自动对产品进行侦测，配有垂直、水平两组光眼可供选择,适应不同尺寸的产品包装；
- ◆ Product changeovers can be easily realized by hand wheel adjustments, no elements need to be replaced.
更换不同产品规格时，只需通过手轮做轻松调整，无需更换任何部件；
- ◆ Machine produces an enclosed pack with sealing on 3 sides.
采用对折膜，对其他三边进行封口包装；
- ◆ Applicable for PE, POF and other center-folded shrink films, especially for POF shrink film packing.
适用于PE/POF等工业标准热封膜，尤其适用于POF热封膜封切包装；
- ◆ Automatic waste strip wind up design, motor driven roller cradle, variable speed control by dance bar.
配有自动收废料装置；
- ◆ Motor-driven Infeed conveyor and free roller Outfeed conveyor are options for fully automatic application.
全自动化生产可选择电机驱动的进料皮带和无动力辊筒出料传送带；

OPTIONS 可选配置

- ◆ Kissing Belt (suitable for small, irregular products)/过渡皮带（适用于小产品、不规则形状产品）
- ◆ Printing Film Photo sensor/印刷膜色标跟踪电眼
- ◆ 1.5m infeed conveyor/1.5米进料皮带
- ◆ Automatic Product Pusher/自动推料装置



全自动型

Model/型号	ASS500LB	BTV4530L
Format Limits(W+H)/产品（宽+高）限制	450mm	内炉尺寸：(L)1800×(W)450×(H)300mm
Sealing Width/封口宽度	500mm	/
Max.Product Height/产品最大高度	220mm	280mm
Max.Film Width/最大膜宽	650/650	430mm
Power Supply/电源电压	220V/1Phase 3KW	380V/50Hz 16KW
Air Source/压缩空气耗气量	6bar,10L/min	/
Max.Conveyor Speed/最快传送速度	35m/min	/
Max. Capacity/生产能力	60p/min	热收缩包装速度：30~80 packs/min
Sealing Method/封口形式	Servo drive seal伺服驱动横封	/

ST6040Q+ BSE5045A

Semi-auto. Sleeve Sealing Shrink Packager

半自动袖口式封口收缩机

标准型

Model/型号	ST6040Q
Power supply/电源电压	220-240V/50-60Hz
Seal size/封切尺寸	L600xH400mm
Working efficiency/工作效率	3-6sets/min.
Air pressure/气压	1HP/2KW
Sealing time/封切时间	0.5-1.5s
Machine size/机器尺寸	115x91x186cm
Machine weight/机器重量	220kg



Model/型号	BSE5045A
Power supply/电源电压	3Phase 380V/50Hz
Heater power/加热管功率	15KW
Tunnel size/收缩炉尺寸	150x50x45cm
Machine size/机器尺寸	275x79x245cm
Machine weight/机器重量	260kg

FEATURES 特性

- ◆ Double instruction lights system to prevent the mistake of sealing and protect the operato meanwhile
 - ◆ Double size fan carrying system ensur the perfect of sealing
 - ◆ Imported AC contractor, the temperature be controlled by automatic
 - ◆ Imported frequency converter, stepless speed regulating
 - ◆ Super cooling system to ensure the perfect shape of products quickly ofter shrinking
 - ◆ The control panel be operated with safe and simple
 - ◆ The imputing position can be adjustable precision base on the size of products
 - ◆ The size of tunnel can be customized for your requet
 - ◆ Up and down large power fan system to assure the excellent effect of shrinking in onetime
- ◆ 双指示灯提示，有效防止误切包装物，同时保障操作者的安全
 - ◆ 双边送风系统，确保封口完美无暇
 - ◆ 进口交流接触器，自动恒温控制
 - ◆ 进口变频器，无级变速
 - ◆ 超大风量冷却系统，产品热收缩后迅速冷却定型
 - ◆ 控制面板操作安全简单
 - ◆ 进料口精确定位，且可调整
 - ◆ 炉道尺寸可根据客户需要定制
 - ◆ 上下运风系统，确保一次性达到完美包装效果

ST6040Q+BSE5045A is suitable for wrapping of such prkducts as pop-top, mineral water, bottles beer, drinks etc without bottom-tyay(or with bottom-tray). Working with PE shrink tunnel to pack the goods perfectly. The whole producing process adopt the Germany aduanced technics. And the main parts are imported from international famous companies, such as OMRON, MITSUBISHI, FUJI ets, capability stable and using long-time. ST6040Q+BSE5045A 适合于易拉罐、矿泉水、啤酒、玻璃瓶、饮料等各种瓶装产品的无底托(或有底托)热收缩包装；同时与恒温PE收缩炉配套使用，使物品达到完美的包装效果。本套设备采用德国先进工艺，其主要配件均采用各个知名品牌，如欧姆龙、三菱、富士等；整机性能稳定，使用寿命长。

BSE6040A+ST6040A

Automatic Sleeve Sealing Shrink Packager
自动袖口式封口收缩机

自动集合式



FEATURES 特性

- ◆ Upper and lower motor driven conveyor system to facilitate film convey
- ◆ The brand "NORGEN" of Bngland air-run control the complete set of working
- ◆ Imported Japan Mitsubishi programmable logic controller (PLC) with stable performance
- ◆ Stick-free Teflon-coated sealing cutter to ensure clear and stick-free sealing lines
- ◆ Reinforced conveyor motor to ensure steady transport
- ◆ Adopting German advanced technology, elaborating according to European process
- ◆ Imported converter to achieve 0-12m/min. Adjustable speed range
- ◆ Large power double fan motor, assure enough circulate wind
- ◆ Ultrastrong cooling system to ensure quick formation after heat-shrinking of products
- ◆ Furnished with anchor bolts for integration with the production line

Model/型号	ST6040A	ST4020A
Power supply/电源电压	220-240V/50-60Hz	
Seal size/封切尺寸	L600xH400mm	L400xH200mm
Working efficiency/工作效率	8-10sets/min.	
Air pressure/气压	1HP/2KW	
Conveyor width/输送带宽度	300mm	190mm
Machine size/机器尺寸	210x135x190cm	180x85x110cm
Machine weight/机器重量	220kg	170kg

Model/型号	BSE6040A	BSE4530A
Power supply/电源电压	3Phase 220V,380-460V/50-60Hz	
Heater power/加热管功率	21KW	11KW
Tunnel size/收缩炉尺寸	180x60x40cm	120x45x30cm
Machine size/机器尺寸	275x84x155cm	215x69x140cm
Machine weight/机器重量	280kg	230kg

注: BSE4530A配ST4020A时, 炉长加长至150cm

ST6040Z+BSE5045A

Automatic Sleeve Sealing Shrink Packager
自动袖口式封口收缩机



标准型

Model/型号	ST6040Z
Power supply/电源电压	220-240V/50-60Hz
Seal size/封切尺寸	L550xW430mm
Working efficiency/工作效率	8-12sets/min.
Power/功率	2KW
Sealing time/封切时间	0.5-1.5s
Machine size/机器尺寸	175x100x200cm
Machine weight/机器重量	450kg

Model/型号	BSE5045A
Power supply/电源电压	3Phase 380V/50Hz
Heater power/加热管功率	15KW
Tunnel size/收缩炉尺寸	150x50x45cm
Machine size/机器尺寸	275x79x155cm
Machine weight/机器重量	260kg

FEATURES 特性

ST6040Z+BSE5045A全自动直进料袖口式包装机, 采用独有的直线式设计, 结构紧凑占地面积小, 针对一些场地受限及包装过程中无需调整产品前进方向, 十分方便, 不会受包装物长度的限制。可独立工作, 也可与生产线对接自动进料、裹膜、封切、收缩、冷却、定型, 无人化流水作业。适用范围: 主要适用于长度较长物体或饮料、啤酒、矿泉水、易拉罐、玻璃瓶等有纸托、纸箱的集合或单一收缩包装。

CONFIGURATION 配置

- ◆ ST-6040Z采用独特最佳设计的直线进料方式;
- ◆ 该机引进国外先进技术及工艺制作, 设备性能稳定可靠;
- ◆ 采用三菱 "PLC" 可编程程序控制器, 实现机、电、气一体化;
- ◆ 该机采用直线式进料, 包装物的长度不受限制;
- ◆ 该机与普通侧进料机器相比, 有速度和衔接上的优势;
- ◆ 采用特别设计的封刀, 封口线牢固、不开裂、不易粘刀;
- ◆ 采用进口光电, 准确定位;
- ◆ 进口原装输送皮带, 经久耐用, 并增加变频器控制皮带的传送速度;
- ◆ 人性化设计的控制箱, 方便操作人员的操作;
- ◆ 三组水平检测光电, 可针对不同的产品;
- ◆ 封切时后端配有压料装置, 对于包装较轻的物品, 亦都不会发生移位;
- ◆ 可根据产品的包装要求, 加装纵向双封切系统, 做全封闭的PE热缩包装;
- ◆ BSE5045A采用进口双运风电机, 使炉腔内热风散布均匀, 收缩后效果更加美观;
- ◆ 炉腔内可调节的热风导流循环结构, 设备更节能;
- ◆ 采用实心钢杆外包进口硅胶管, 链杆式输送硅胶经久耐用。

ST6040P+BSE5045A

Full Automatic Stacking Sleeve Sealing
& Shrink Packager

全自动码垛袖口式封切&收缩包装机

FEATURES 特性

- ◆ST6040P+BSE5040A which is suitable for shrinking and wrapping all kinds of single row/double row /four rows and in multilayer box. It integrates the double function in tidying and heaping automatically to increase the efficiency too much. The product is looks neatnessand compact to ensure its quality and for long term in logistics purpose.
- ◆Used for packing some commodities such as heat shrink wrapping for collective of soap/toothpaste/stationery and so on
- ◆Especially in packing of cigarettes from tobacco contribution centre or others packagers in different shape and multilayer
- ◆ST6040P+BSE5040A适用于各类盒装品单层或多层数的集体无底托收缩包装，包装过程中具有自动排列、堆垛等功能，大大提高了生产效率，产品经过包装后具有外观整洁、紧凑不散，保证物品质量及长途运输需要。
- ◆主要适用于日用品，如肥皂、牙膏、文具等的集合热缩包装、烟草配送中心的烟条包装或其他各种形状包装物的叠层包装。



标准型

Model/型号	ST6040P	BSE5045A
Max packing size /最大包装尺寸	400 × 300 × 300mm	450 × 400mm
Sealing size /封切刀尺寸	700mm	/
Height of work table /工作台度	800 ± 50mm	800 ± 50mm
Packing speed /包装速度	8-15bags/min	20-30bags/min
Temperature /温度 (℃)	0-200	0-400
Air pressure /外接气源	6-8kg/cm³	/
Applicable film /适用收缩膜	PE	PE
Power voltage /电压	3P,380V/50Hz	3P,380V/50Hz
Power /功率	1.2KW	15KW
Dimension /外型尺寸	1337mm × 2142mm × 1896mm	2750 × 790 × 1550mm
Machine weight /机器重量	230Kg	260KG

YCBS130+YCBS80

Automatic Sleeve Sealing Shrink Packager
热收缩膜包机



Model/型号	YCBS130	YCBS80
Machine size /整机外形尺寸	L19605mm × W1530mm × H2500mm	L18145mm × W1530mm × H2500mm
Tunnel size /热收缩通道尺寸	L3000mm × W700mm × H450mm	L3000mm × W700mm × H450mm
Max package size /最大成包尺寸	L460mm × W280mm × H350mm	L460mm × W280mm × H350mm
Package speed /包装速度	130包/分钟(pcs/min)	80包/分钟(pcs/min)
Conveyor speed /输送带宽度	610mm	610mm
Power /工作电源/功	三相五线(3Phase 5Line) 380V 65KW	三相五线(3Phase 5Line) 380V 55KW
Air pressure /工作气压	0.6-0.8Mpa	0.6-0.8Mpa
Air source /用气量	100NL/min-120NL/min	100NL/min-120NL/min
Total weight /总重量	4800KG	4600KG



FEATURES 特性

- 1、适用于啤酒，饮料，果汁，瓶装水，乳品，调味品等收缩膜包装。
- 2、独特的薄膜放卷装置及薄膜恒张力输送，薄膜瞬时切断，自动搭接裹膜方式，收缩包装后强度更高。
- 3、独有的“威震动”分瓶方式，不卡瓶，不挤瓶，输送顺畅。
- 4、伺服电机控制系统，拨杆进瓶，送膜、切膜、裹膜精确同步，稳定可靠。
- 5、10寸液晶彩屏，操作界面友好，参数设定快捷，便于人机交流及操控。
- 6、收缩室采用循环运风技术，结构独特、隔热保温，温控精度高，包装效果更佳。
- 7、独家研制的“超薄膜输送系统”，使用PE膜更薄，上膜速度更快、更稳定。
- 8、此机器可增加彩膜包装系统。

YCBS26

Full Automatic Stacking Sleeve Sealing
& Shrink Packager
单片裹膜式收缩包装机

FEATURES 特性

- 1、适用于啤酒，饮料，果汁，瓶装水，乳品，调味品等有底托或无底托集束包装。
- 2、独特的薄膜放卷装置及薄膜恒张力输送，薄膜瞬时切断，自动搭接裹膜方式，收缩包装后强度更高。
- 3、伺服电机控制系统，拨杆进瓶，送膜切膜裹膜精确同步，稳定可靠。
- 4、触摸式液晶彩屏，操作界面友好，参数设定快捷，便于人机交流及操控。
- 5、收缩室采用独有的热风循环结构，网带传动平稳，耐磨损级别高，寿命长。
- 6、采用循环运风技术，结构独特、隔热保温，温控精度高，包装效果更佳。
- 7、此机器可增加彩膜包装系统。



标准型

Model/型号	YCBS26
Machine size/整机外形尺寸	L13100mm * W1530mm * H2500mm
Tunnel size/热收缩通道尺寸	L2500mm * W650mm * H450mm
Max package size/最大成包尺寸	L460mm*W280mm * H350mm
Package speed/包装速度	22包/分钟(pcs/min)
Conveyor speed/输送带速度	533mm
Power/工作电源/功	三相五线(3Phase 5Line) 380V 46KW
Air pressure/工作气压	0. 6-0. 8Mpa
Air source/用气量	100NL/min-120NL/min
Total weight/总重量	4000KG

Vacuum
Machine

真空机

VACUUM MACHINE
VACUUM MACHINE
VACUUM MACHINE
VACUUM MACHINE
VACUUM MACHINE
VACUUM MACHINE
VACUUM MACHINE




VM(Q)

Automatic Vacuum Packager 系列真空(充气)包装机

VM300TE/A

Mini Table Model 迷你桌上型

- ◆ Stainless-steel vacuum chamber/不锈钢真空室
Chamber size/真空室尺寸: 385 × 280 × 50mm
Single sealing-bar/单封条尺寸: L260 × W8mm
- ◆ Vacuum pump/真空泵
Capacity/抽气速度: 10m3/h, Cycle time/工作时间: 10-20sec.
- ◆ Machine/机器情况
Table model/桌上型, Stainless-steel housing/不锈钢材料,
High transparent lid/高透明盖.
Voltage/电压: 1phase 220V/50Hz Power/功率: 0.4KW
Machine size/机器尺寸: 490 × 450 × 320mm



DZ300T/A


- ◆ Options/可选项
Other voltages available/其他任何电源要求

VM(Q)400TE


Table Model 桌上型

DZ400T are suitable for stand vacuum packaging & DZQ400T are suitable for vacuum packaging with gas-flush

- ◆ Stainless-steel vacuum chamber/不锈钢真空室
Chamber size/真空室尺寸: 440 × 420 × 75mm
Single sealing-bar/单封条尺寸: 400 × 10mm(DZ400TE/A)
Double sealing-bar/双封条尺寸: 400 × 10mm(DZ400TE/B)
- ◆ Vacuum pump/真空泵
Capacity/抽气速度: 20m3/h, Cycle time: 10-25sec.
- ◆ Machine/机器情况
Table model, Stainless-steel housing, High transparent lid.
Voltage: 1phase 220V/50Hz Power: 0.9KW
Machine size: 560 × 500 × 460mm



DZ400TE/A



DZ400TE/B


- ◆ Options/可选项
Gas flush, Busch pump, Other voltages available.

VM(Q)500TE


Table Model 桌上型

DZ500T are suitable for stand vacuum packaging & DZQ500T are suitable for vacuum packaging with gas-flush

- ◆ Stainless-steel vacuum chamber/不锈钢真空室
Chamber size/真空室尺寸: 520 × 525 × 100mm
Single sealing-bar/单封条尺寸: 500 × 10mm(DZ500TE/A)
Double sealing-bar/双封条尺寸: 500 × 10mm(DZ500TE/B)
- ◆ Vacuum pump/真空泵
Capacity/抽气速度: 20m3/h, Cycle time: 15-30sec.
- ◆ Machine/机器情况
Table model, Stainless-steel housing, High transparent lid.
Voltage: 1phase 220V/50Hz Power: 0.9KW
Machine size: 630 × 620 × 460mm



DZ500TE/A



DZ500TE/B

- ◆ Options/可选项
Gas flush, 40m3/h, Busch pump, Other voltages available.

VM(Q)


Automatic Vacuum Packager 系列真空(充气)包装机

VM(Q)400 E


Standard Model 标准型

DZ400N are suitable for stand vacuum packaging & DZQ400N are suitable for vacuum packaging with gas-flush

- ◆ Stainless-steel vacuum chamber/不锈钢真空室
Chamber size/真空室尺寸: 440 × 420 × 75mm
Single sealing-bar/罩封条尺寸: 400 × 10mm(DZ400E/A)
Double sealing-bar/单封条尺寸: 400 × 10mm(DZ400E/B)
- ◆ Vacuum pump/真空泵
Capacity/抽气速度: 20m3/h, Cycle time: 10-25sec.
- ◆ Machine/机器情况
Table model, Stainless-steel housing, High transparent lid.
Voltage: 1phase 220V/50Hz Power: 0.9KW
Machine size: 560 × 500 × 1050mm



DZ400E/A



DZ400E/B


- ◆ Options/可选项
Gas flush, Other voltages available.

VM(Q)500E


Standard Model 标准型

DZ500N are suitable for stand vacuum packaging & DZQ500N are suitable for vacuum packaging with gas-flush

- ◆ Stainless-steel vacuum chamber/不锈钢真空室
Chamber size/真空室尺寸: 520 × 525 × 100mm
Single sealing-bar/单封条尺寸: 500 × 10mm(DZ500E/A)
Double sealing-bar/双封条尺寸: 500 × 10mm(DZ500E/B)
- ◆ Vacuum pump/真空泵
Capacity/抽气速度: 20m3/h, Cycle time: 10-30sec.
- ◆ Machine/机器情况
Table model, Stainless-steel housing, High transparent lid.
Voltage: 1phase 220V/50Hz Power: 0.9KW
Machine size: 630 × 620 × 1050mm



DZ500E/A



DZ500E/B


- ◆ Options/可选项
40m3/h pump, gas flush, Busch pump, Other voltages available.

VM(Q)600E


Standard Model 标准型

DZ600N are suitable for stand vacuum packaging & DZQ600N are suitable for vacuum packaging with gas-flush

- ◆ Stainless-steel vacuum chamber/不锈钢真空室
Chamber size/真空室尺寸: 625 × 625 × 100mm
Single sealing-bar/单封条尺寸: 600 × 10mm(DZ600E/A)
Double sealing-bar/双封条尺寸: 600 × 10mm(DZ600E/B)
- ◆ Vacuum pump/真空泵
Capacity/抽气速度: 40m3/h, Cycle time: 10-35sec.
- ◆ Machine/机器情况
Table model, Stainless-steel housing, High transparent lid.
Voltage: 1phase 380V/50Hz Power: 1.5KW
Machine size: 720 × 720 × 1050mm



DZ600E/A



DZ600E/B

- ◆ Options/可选项
Gas flush, Busch pump, Other voltages available.

DZ(Q)

Automatic Vacuum Packager 真空(充气)包装机

DZP(Q)500/2SB

DZP(Q)600/2SB

Double Chamber Model 双室型

DZP500/2SB Model are suitable for stand vacuum packaging & DZPQ500/2SB are suitable for vacuum packaging with gas-flush.

- ◆ Vacuum chamber/真空室
Stainless-steel flat working plate
4 × Double sealing-bar/双封条尺寸: 520 × 10mm(DZP500/2SB)
4 × Double sealing-bar/双封条尺寸: 620 × 10mm(DZP600/2SB)
- ◆ Vacuum pump/真空泵
Capacity: 2 × 20m³/h(DZP500/2SB), Cycle time: 10-33sec.
40m³/h(DZP600/2SB), Cycle time: 10-40sec.
- ◆ Machine/机器情况
Double chamber model, Stainless-steel housing, Stainless-steel lid.
Voltage: 3phase 380V/50Hz Power: 1.5KW&3.KW
Machine size: 1250 × 750 × 950mm(DZP500/2SB)
1450 × 750 × 1000mm(DZP600/2SB)
- ◆ Options/可选项
Gas flush, 40m³/h pump, Busch pump, Other voltages available.



DZ -600/4SB

Pneumatic working Model 气动工作型

DZ600/4SB are suitable for stand vacuum packaging

- ◆ Stainless-steel vacuum chamber/不锈钢真空室
Chamber size/真空室尺寸: 750 × 705 × 90mm
Double sealing-bar/双封条尺寸: 600 × 8(10)/4mm
- ◆ Vacuum pump/真空泵
Capacity: 40m³/h, Cycle time: 10-40sec.
- ◆ Machine/机器情况
Double chamber model
Stainless-steel housing. Stainless-steel lid.
Voltage: 3phase 220V-380V/50Hz Power: 2.2KW
Machine size: 1450 × 740 × 950mm

适用范围

1. 适用于小袋产品包装如乡巴佬系列、鸡爪、鸡翅、榨菜、豆腐干、小鱿鱼等产品。
2. 全不锈钢制造，防腐蚀，不生锈。



DZ(Q)

Automatic Vacuum Packager 真空(充气)包装机

DZ(Q)400&500/2SB

Double Chamber Model 双室型

DZ500/2SB are suitable for stand vacuum packaging & DZQ500/2SB are suitable for vacuum packaging with gas-flush

- ◆ Stainless-steel vacuum chamber/不锈钢真空室
Chamber size/真空室尺寸: 540 × 570 × 50mm
Double sealing-bar/双封条尺寸: 500 × 10mm
- ◆ Vacuum pump/真空泵
Capacity: 2 × 20m³/h, Cycle time: 10-35sec.
- ◆ Machine/机器情况
Double chamber model
Stainless-steel housing. Stainless-steel lid.
Voltage: 3phase 380V/50Hz Power: 1.5KW
Machine size: 1250 × 750 × 950mm
- ◆ Options/可选项
Gas flush, 40m³/h pump, Busch pump, Other voltages available.



DZ(Q)600/2SB

Double Chamber Model 双室型

DZ600/2SB are suitable for stand vacuum packaging & DZQ600/2SB are suitable for vacuum packaging with gas-flush

- ◆ Stainless-steel vacuum chamber/不锈钢真空室
Chamber size/真空室尺寸: 540 × 670 × 50mm
Double sealing-bar/双封条尺寸: 620 × 10mm
- ◆ Vacuum pump/真空泵
Capacity: 40m³/h, Cycle time: 10-40sec.
- ◆ Machine/机器情况
Double chamber model
Stainless-steel housing. Stainless-steel lid.
Voltage: 3phase 380V/50Hz Power: 3.2KW
Machine size: 1450 × 750 × 1000mm
- ◆ Options/可选项
Gas flush, 63m³/h pump, Busch pump, Other voltages available.



DZ(Q)

Automatic Vacuum Packager

真空(充气)包装机

DZP(Q)800/2SB

Pneumatic working Model 气动工作型

DZP800/2SB are suitable for stand vacuum packaging & DZPQ800/2SB are suitable for vacuum packaging with gas-flush

- ◆ Stainless-steel vacuum chamber/不锈钢真空室
Chamber size/真空室尺寸: 830 × 670 X 50mm
Double sealing-bar/双封条尺寸: 800 × 10mm
- ◆ Vacuum pump/真空泵
Capacity: 63m3/h, Cycle time: 10-35sec.
- ◆ Machine/机器情况
Double chamber model, Stainless-steel housing, Stainless-steel lid.
Voltage: 3phase 380V/50HZ Power: 2.2KW
Machine size: 1470 X 750 X 950mm
- ◆ Options/可选项
Gas flush, Busch pump, Other voltages available.



DZ8060/8035

With Stand Model 柜式型

Any special size available.

- ◆ Stainless-steel vacuum chamber
Single sealing-bar/单封条尺寸: 800 × 10mm(DZ8060/A)
Double sealing-bar/双封条尺寸: 580 × 10mm(DZ8060/B)
- ◆ Double sealing-bar/双封条尺寸: 350 × 10mm(DZ8035)
- ◆ Vacuum pump/真空泵
- ◆ Capacity: 40m3/h. Cycle time: 10-40sec.
- ◆ Machine/机器情况
Floor model, Stainless-steel housing, High Transparent lid. Working height: 900mm
Voltage: 3phase 380V/50Hz
Power: 1.5KW
- ◆ Machine size: 660 × 580 × 960mm
Options/可选项
Gas flush.Busch pump, Other voltages available.



DZ1000C/1200C

Continuous Vacuum Packager

连续式真空包装机



FEATURES 特性

- ◆ This machine is modern auto-packing machine controlled by computer.
It's package material is compound film, such as: polyethylene, polypropylene, nylon and aluminum foil. The bag is packaged under the vacuum situation, which are preserved under state of vacuum without oxygen. So the products can oxidization and corrosion, extend the time limit of preservation.
- ◆ This machine apply to pack meat, medicine, spice, candy, drink, vegetable, fruit, victualage, legume, foodstuff, chemical material, electronic, coponent, hardware, etc.
- ◆ This machine is easy for operation, stable run, low noise, high efficiency, convenient maintenance and nicely strllcture.



Continuous Model 连续型

Model/型号	DZ-1000C	DZ-1200C
Power supply/供给电源	3phase 4 lines 380V / 50Hz 或220V / 60Hz	
Vacuum density/真空密度	≤-0.00094MPa	
Vacuum capacity/真空容量	1000 × 350 × 60m ³ / m	1200 × 460 × 100m ³ / m
Sealing-bar size/封口尺寸	1000 × 8mm	1200 × 8mm
Packing speed/包装速度	6times / min	
Bleed air frequency/放气频率	250m ³ / h	250m ³ / h
Machine size/机器尺寸	1740 × 1360 × 1300mm	1852 × 1480 × 1360mm
Machine weight/机器重量	About 500kg	About 600kg

VMA420

Full-Automatic Continuous Thermoforming Machine

全自动真空包装机

Continuous Model 连续型

Model/型号	VMA420
Power supply/供给电源	三相、380VAC
Vacuum density/真空密度	-0. 1MPa
Up-film width/上膜宽度	393mmmm
Down-film width /下膜宽度	423mm
Packing speed/包装速度	1 ~ 6次/min
Air pressure/气源气压	≥0.6MPa
Machine size/机器尺寸	6400×1070×1765mm
Machine weight/机器重量	约1.9吨（包括真空泵）

FEATURES 特性

- 1.设备绝大部分零件均采用铝或不锈钢制造，符合GMP/QS认证。
- 2.采用伺服电机驱动和链条夹持组成牵引装置，行程可任意调节。
- 3.良好的电器配置确保设备长期运行的可靠性。设备的控制系统、伺服驱动系统、电气系统等采用国际知名品牌。
- 4.配置光电对版装置，保证包装图案准确定位。同时可配备自动喷码、打码系统。
- 5.横切采用裁切方式，成品切线准确。
- 6.本机采用德国机械结构技术，便于加料，分体式结构便于安装



Vacuum Gas-filling Packagine Machine
真空气调包装机

DZ-600W

External Vacuum Model 外抽式

DZ-600W : M.S body with paint
DZ-600W/S : Stainless steel body

Model/型号	DZ- 600W
Power supply / 供给电源	220-240V 50-60Hz
Hot sealing power/ 热封功率	0.8kw
Vacuum pump power/ 真空泵功率	0.75kw
Sealing-bar size/ 封口尺寸	600mm×10mm
Working table size/ 工作台尺寸	600mm×400mm
Packing speed/ 包装速度	1~3times / min
Machine size/ 机器尺寸	670×500×1000mm
Machine weight / 机器重量	80kg

DZQ-600L

External Vacuum Model 外抽式

DZQ-600L : M.S body with paint
DZQ-600L/S : Stainless steel body

Model/型号	DZQ600L	DZQ600L/S
Power supply/ 供给电源	AC 380V / 50HZ	
Hot sealing power/ 热封功率	500W	600~1000W
Vacuum pump power/ 真空泵功率	750W	750W
Sealing-bar size/ 封口尺寸	L: 600mm W: 8mm, 10mm	
Vacuum pump stroke vlomne/ 真空泵排气量	20m³ / h	20m³ / h
Film thickness(single), 薄膜厚度(单层)	≤0.10mm	≤0.18mm
Machine size / 机器尺寸	800×900×1700mm	
Machine weight / 机器重量	240kg	280kg

Option Size: 800mm, 1000mm

FEATURES 特性

- ◆The well-found function could meet different packing requirements,just for sealing,for charging,for vacuum packing,for charging inter gas after vacuum pumping.
- ◆Adopt the automatic procedure control, gasping, charging, sealing, mark letter, cooling etc, procedure automatically.
- ◆Adopt the double charging mouth with no vacuum chamber system. the package will be drop out from the charging mouth automatically after gasping(charging), perfect sealing performance, adjustable speed and high working efficiency.
- ◆Adjustable times on the gasping, charging and hot sealing, thus it is used for sealing all kinds of film and complex films.
- ◆功能齐全、适应各种不同要求的包装，可用于单一的封口工序，可用于单一的充气工序，可用于真空包装，也可用于抽真空后充入惰性气体的包装。
- ◆采用自动程序控制，抽气、充气、封口、印字、冷却等程序自动完成。
- ◆采用无室双气嘴机械，抽气(充气)嘴在完成工作程序后，自动退出包装袋，密封性能好，进退速度可调，工作效率高。抽、充气时间及热时时间均可调，适用于各种薄膜及复合膜的封合。



External Vacuum Packager
外抽式家用真空包装机

VE400/VE500

External Vacuum Model 外抽式


Model/型号	VE400	VE500
Power supply / 供给电源	220V / 50Hz, 100W	220V / 50Hz, 120W
Sealing-bar size / 封口尺寸	400×8mm	500×8mm
Packing speed / 包装速度	1~2times / min.	1~2times / min.
Machine size / 机器尺寸	L400×W310×H260mm	L500×W360×H330mm
Machine weight / 机器重量	15kg	19kg



DZ-280A

House-hold Vacuum sealer 家用真空封口

Model/型号	DZ-280A
Power supply供给电源	220V / 50HZ
Vacuum / 真空极限	0.35Mpa
Sealing length / 封口长度	40-280mm
Machine size/机器尺寸	350×140×70mm
Machine weight /机器重量	2.4kg

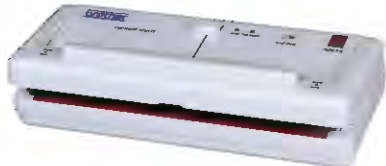

TW-450

Hand Wrapping Machine 手动保鲜膜机

Model/型号	TW-450	TW-550
Power supply / 供给电源	220V / 50-60HZ	220V / 50-60HZ
Heat cut length / 封切长度	32mm	42mm
Roller width / 滚筒宽度	452mm	552mm
Heat shrinking plate / 热收缩板	385×123mm	485×123mm
Machine weight / 机器重量	6.5kg	7.5kg



FEATURES 特性

- ◆ Having superior vacuum extraction ability this piece of equipment can seal all manner of plastic bags.
- ◆ It is a machine that is compact, portable in size, made of simple fabric and convenient to use.
- ◆ With the packaging this machine can produce. food can be cept fresh for a prolonged of time in storage at normal temperatures. It can also be used for food stored in the icebox, preventing odor, going off or dehydration.
- ◆ 该机抽真空性能良好，适用于多种塑料袋复合袋的真空包装。
- ◆ 该机体积小、结构简单、使用方便。
- ◆ 经封存食品在常温下可延长保鲜期，可有效地防止冰箱内食品串味、变质、脱水干裂。

BAND SEALING MACHINE
BAND SEALING MACHINE
BAND SEALING MACHINE
BAND SEALING MACHINE
BAND SEALING MACHINE
BAND SEALING MACHINE
BAND SEALING MACHINE
BAND SEALING MACHINE
BAND SEALING MACHINE
BAND SEALING MACHINE

Band Sealing Machine

封口机



SF

Mult-Functional Film Sealer 多功能薄膜封口机



SF150W

Horizontal Model 卧式型

Model/型号	SF-150W
Power supply / 电源电压	110V,220-240V / 50-60Hz 1 Phase
Power consumption / 耗用功率	500W
Sealing speed / 封口速度	0-12m / min
Sealing width / 封口宽度	6.15mm
Sealing film thickness / 薄膜厚度	0.02-0.08mm
Conveyor loading / 输送载量	5kg
Machine size / 机器尺寸	900x480x380mm
Machine weight / 机器重量	35kg



SF150LW

Vertical Model 立式型

Model/型号	SF-150LW	SF-150LD
Power supply / 电源电压	110v,220-240V / 50-60Hz 1Phase	
Power consumption / 耗用功率	500W	500W
Sealing speed / 封口速度	0-12m / min	0-12m / min
Sealing width / 封口宽度	6-15mm	6-15mm
Sealing film thickness / 薄膜厚度	0.02-0.08mm	0.02-0.08mm
Temperature range / 温控范围	0-300℃	0-300℃
Printing letters / 印字个数	1 lines 15 letters (steel pressing wheel printing)	
Conveyor loading / 输送载量	5kg	5kg
Machine size / 机器尺寸	900x420x660mm	900x480 x 1150mm
Machine weight / 机器重量	42kg	45kg



SF150LD

With Stand Model 落地型

FEATURES 特性

This series sealer is suitable for small bags packing and adopts electronic constant temperature control system and speed adjusting transmission mechanism. It can seal plastic films of various materials. Such as PE, PP, Aluminum foil. And can be fixed date embossing system. And the newly type(microcomputer control)with counting device(FRD1000)

Sf150系列多功能薄膜封口机适合于塑料袋的封口包装，采用电子恒温控制和无极调速传动；可封合各种材料的塑料薄膜(PE, PP, 铝膜等)，还可配上压痕印字装置；我司最新款一微电脑控制系统，还配有计数功能。(FRD1000)

FRD

Solid-Inker Printing Sealer
墨轮印字封口机

FRD-1000W

Horizontal Model 卧式型

Model/型号	FRD-1000W
Power supply / 电源电压	110V, 220-240V / 50-60Hz 1 Phase
Power consumption / 耗用功率	600W
Sealing speed / 封口速度	0-13m / min
Sealing width / 封口宽度	6-15mm
Sealing film thickness / 薄膜厚度	0.02-0.08mm
Temperature range / 温控范围	0-300℃
Printing letters / 印字数	2 lines 30letters with inker
Conveyor loading / 输送载量	5kg
Machine size / 机器尺寸	950x400x660mm
Machine weight / 机器重量	45kg



FRD-1000LW

Horizontal Model 卧式型

Model/型号	FRD-1000LW	FRD-1000LD
Power supply / 电源电压	110V, 220-240V / 50-60Hz 1 Phase	
Power consumption / 耗用功率	600W	600W
Sealing speed / 封口速度	0-13m / min	0-13m / min
Sealing width / 封口宽度	6-15mm	6-15mm
Sealing film thickness / 薄膜厚度	0.02-0.08mm	0.02-0.08mm
Temperature range / 温控范围	0-300℃	0-300℃
Printing letters / 印字数	2 lines 30letters with inker	
Conveyor loading / 输送载量	5kg	5kg
Machine size / 机器尺寸	950x400x660mm	950x480x1150mm
Machine weight / 机器重量	46kg	50kg

FRD-1000LD

With Stand Model 落地型

FEATURES 特性

FRD series multi-functional film sealer(with solid inker printer)can be print the desired date date simult-aneously with sealing. With the characters clear and conspicuous, the colors are selectable and uneasy to erase and unchangeable, and instant printing and instant dry. It is convenient t o change date letters.
FRD1000系列固体墨轮印字封口机可以在封口的同时打印生产日期等文字；字迹清晰，颜色可选，且不易被擦除和更改；瞬印瞬干，换字方便。

FR

Solid-Inker Printing Sealer
墨轮印字封口机

FRW200

With Stand Model 落地型

Model/型号	FRW 200
Power supply / 电源电压	110V, 220-240V / 50-60Hz 1 Phase
Power consumption / 耗用功率	780W
Sealing speed / 封口速度	0-10m / min
Sealing width / 封口宽度	6-15mm
Sealing film thickness / 薄膜厚度	0.02-0.08mm
Temperature range / 温控范围	0-300℃
Printing letters / 印字数	2 lines 26 LETTERS
Conveyor loading / 输送载量	7.5kg
Machine size / 机器尺寸	1100 x 610 x 1030mm
Machine weight / 机器重量	80kg



FRL600

Heavy Duty Model 载重型

Model/型号	FRL600
Power supply / 电源电压	110V, 220-240V / 50-60Hz
Power consumption / 耗用功率	830W
Sealing speed / 封口速度	0-13m / min
Sealing width / 封口宽度	6-13mm
Sealing film thickness / 薄膜厚度	0.04-0.50mm
Machine size / 机器尺寸	1200x520x1280mm
Machine weight / 机器重量	98kg



FEATURES 特性

- ◆ Sealing strip may used steel or PTFE(should be specified);
- ◆ Suitable for sealing the single-layer plastic film of aluminum, paper, multiple plastic;
- ◆ Suitable packaging and sealing the powdery, grainy, creamy, liquid goods and SO on;
- ◆ Max sealed height reach 600mm(model RFL600)360mm(mode RFL360)
- ◆ Equipped with colored ink printing device(should be specified).

PCS

Plastic Film Sealer

手压封口机

PCS100P / 200P

Plastic Model 塑壳型

- ◆ Impulse power / 功率 160W, 300W
- ◆ Seal length / 封口长度 100mm, 200mm
- ◆ Seal width / 封口宽度 2mm, 2mm
- ◆ Machine weight / 机器重量 1.4kg, 2.7kg



- ◆ Compact Design
- ◆ Strong Water Tight Seal
- ◆ Fast Operating
- ◆ Power Saving Precision Electronic Circuit
- ◆ Long Life

PCS200I / 300I

Iron Model 铁壳型

- ◆ Impulse power / 功率 160W, 300W
- ◆ Seal length / 封口长度 100mm, 200mm
- ◆ Seal width / 封口宽度 2mm, 2mm
- ◆ Machine weight / 机器重量 2.7kg, 4.5kg



- ◆ Compact Design
- ◆ Strong Water Tight Seal
- ◆ Fast Operating
- ◆ Power Saving Precision Electronic Circuit
- ◆ Long Life

PCS200A / 300A /400A

Aluminum Model 铝壳型

- ◆ Impulse power / 功率 300W,400W, 400W
- ◆ Seal length / 封口长度 200mm, 300mm, 400mm
- ◆ Seal width / 封口宽度 2mm, 2mm, 2mm
- ◆ Machine weight / 机器重量 2.7kg, 4.5kg, 5.5kg



- ◆ Compact Design
- ◆ Strong Water Tight Seal
- ◆ Fast Operating
- ◆ Power Saving Precision Electronic Circuit
- ◆ Long Life

PCS200C / 300C

Side Cutter Model 侧刀型

- ◆ Impulse power / 功率 300W, 400W
- ◆ Seal length / 封口长度 200mm, 300mm
- ◆ Seal width / 封口宽度 2mm, 2mm
- ◆ Machine weight / 机器重量 2.7kg, 4.5kg



- ◆ Compact Design
- ◆ Strong Water Tight Seal
- ◆ Fast Operating
- ◆ Power Saving Precision Electronic Circuit
- ◆ Long Life

PCS200M /300M

Middle Cutter Model 中刀型

- ◆ Impulse power / 功率 300W, 400W
- ◆ Seal length / 封口长度 200mm, 300mm
- ◆ Seal width / 封口宽度 2mm, 2mm
- ◆ Machine weight / 机器重量 2.7kg, 4.5kg



- ◆ Compact Design
- ◆ Strong Water Tight Seal
- ◆ Fast Operating
- ◆ Power Saving Precision Electronic Circuit
- ◆ Long Life

PFS

Pedal Sealing Machine

脚踏封口机

PFS-F350/F450/F600

Pedal Model 瞬热型

上下可调式重物封口托架

Model/型号	PFS-F350	PFS-F450	PFS-F600
Power / 功率	600W	800W	1000W
Sealing length / 封口长度	350mm	450mm	600mm
Sealing width / 封口宽度	2-5mm	2-5mm	2-5mm
Machine size / 机器尺寸	450 × 150 × 880mm	550 × 520 × 880mm	700 × 570 × 880mm
Machine weight / 机器重量	19kg	21kg	24.5kg




PFS-P350/P450/P600

Printer Model 打码型

带打码功能，封口的同时打上生产日期

Model/型号	PFS-P350	PFS-P450	PFS-P600
Power / 功率	600W	800W	1000W
Sealing length / 封口长度	350mm	450mm	600mm
Sealing width / 封口宽度	2-5mm	2-5mm	2-5mm
Machine size / 机器尺寸	450 × 150 × 920mm	550 × 520 × 920mm	700 × 570 × 920mm
Machine weight / 机器重量	25kg	27kg	30kg

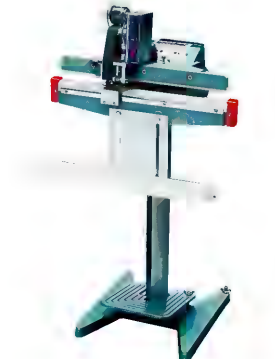

PFS-D300/D400

Direct Model 直热型 厚袋，超厚袋封口，工作效率特别高

Model/型号	PFS-D300	PFS-D400
Power / 功率	300W	400W
Sealing length / 封口长度	300mm	400mm
Sealing width / 封口宽度	10mm	10mm
Machine size / 机器尺寸	345 × 485 × 880mm	445 × 485 × 880mm
Machine weight / 机器重量	14kg	16kg



FEATURES 特性

There are two kinds of pedal sealers; impules sealer and direct heatsealer, Impulse sealer is suitable for sealing polyvinyl chloride, polyethylene bags. Direct heat sealer is suit-able for sealing cellophane, aluminium foil, copper foil, tin foil and polystyrene compound bags and heat prints the production date and expiration date in the seal. The temperature is electronically controlled and is easy to be adjusted. The temperature is stably controlled.



FILLING&SEALING MACHINE
 FILLING&SEALING MACHINE
 FILLING&SEALING MACHINE
 FILLING&SEALING MACHINE
 FILLING&SEALING MACHINE
 FILLING&SEALING MACHINE
 FILLING&SEALING MACHINE
 FILLING&SEALING MACHINE
 FILLING&SEALING MACHINE
 FILLING&SEALING MACHINE

Filling&Sealing Machine

灌装 & 封口机



FRG2001E

Automatic Cup Fill-seal Machine
 盒杯灌装封盖机



Automatic Model 自动型

Model/型号	FRG2001E
Power supply / 电源电压	110, 220-240V / 50-60Hz
Capacity / 工作效率	960-2500cups/hr.
Filling accnracy / 灌装精度	< ± 1.5%
Seal material / 封盖材料	PP PE PET / PE
Machine size / 机器尺寸	1800x540x1400mm
Machine weight/机器重量	360kg



FRG60

Automatic Cup Fill-seal Machine
 盒杯灌装封盖机

Automatic Model 自动型



Model/型号	FRG60
Power supply / 电源电压	110, 220-240V / 50-60Hz
Capacity / 工作效率	3600cups/hr.
Filling accnracy / 灌装精度	< ± 1.5%
Seal material / 封盖材料	PP PE PET / PE
Machine size / 机器尺寸	3300x650x1600mm
Machine weight/机器重量	750kg

Automatic Cup Filling & Sealing Machine

Machine funtion:

- *Auto. Cup drop system
- *Non-drip cut-off filling nozzle
- *Pneumatic seal & punch station
- *No cups no fill device
- *Photocell registration device
- *Hot foil coding assembly
- *Approx. 60-80cups / min.
- *Snap-on caps dispenser & press-on capping assembly
- *Cups discharge guide plate

FEATURES 特性

- ◆ Automatically jelly cup, filling, sealing cutting to individuals.
- ◆ Automatic liquid filling
- ◆ A11 stainless steel
- ◆ Photocell control film
- ◆ With automatic drop cup sets

FRG系列自动盒杯灌装封盖机采用全不锈钢制造, 适用于各种形状的塑杯、塑盒作容器的液体饮料灌装、封口、切边工作; 机器自动控温、自动卷膜, 并伴有日期打印等功能, 广泛应用于食品饮料、酿造工业、医药等领域。

Automatic Cup Sealing Machine
盒杯封盖机

FRG2001A & FRG2001B

Model/型号	FRG2001A	FRG2001B
Power supply / 电源电压	110V, 220-240V / 50-60Hz 1Phase	
Power consumption / 功率	600W	400W
Sealing speed / 包装速度	500-600cup/hr.	300-400cup/hr.
Machine weight / 重量	40kg	32kg
Machine size / 机器尺寸	450x560x860mm	450x360x690mm



FRG07 & FRG2001D

Tray Model 适用于方盒型
Semi-Auto. Tray Sealer

Model/型号	FRG07	FRG2001D
Power supply / 电源电压	110V, 220-240V / 50-60Hz 1Phase	
Power consumption / 功率	800W	600W
Sealing speed / 包装速度	100-300cup/hr.	500-600cup/hr.
Machine weight / 重量	45kg	40kg
Machine size / 机器尺寸	450x320x550mm	450x560x860mm

StandardTray size: 137 × 95mm / 230X190mm / 260X190mm / 137 × 190mm
other size avilable / 其他任何尺寸可定做
标准方盒尺寸: 137 × 95mm / 230X 190mm / 260 × 190mm / 137 × 190mm



FEATURES 特性

- ◆ Suitable for beverage of pearl milk tea, bubble black tea, fruit, soy bean milk, soup of lunch box, cup wateretc.
- ◆ Suitable various containe of EPS, PS, PP etc.
- ◆ Goodly superficies;
- ◆ Stainless steel&aluminum body;
- ◆ Sanitary, convenience, quick pack;
- ◆ Sealing film could print AD, and intensive propaganda;
- ◆ Small bulk. 1ight wight;

Automatic Filling Machine
自动灌装机

Liquid Filling Model 液体填充型

Model/型号	SYF
Air pressure/气压	0.4-0.6MPa
Filling speed/填充速度	20-60bottles/min
Filling accuracy/填充精度	≤ ± 1%



FEATURES 特性

- ◆ This machine is the semi-automatic piston type filling machine, working under the state without electricity,it is sater to operate.
- ◆ This machine has two filling heads in-phase, improving the work efficiency.
- ◆ This machine is reasonable in design, smart in model, easy to operate, the pneumatic part adopts the pneumatic components of germany festo and taiwan airtac.
- ◆ The part conacting materials is made of 316L stainless steel.
- ◆ With adjustment handle of filling volume, the filling speed can be adjusted at will, with high filling accuracy,
- ◆ Filling head adopts anti-leakage, anti-pull and with lifting filling device.
- ◆ Optional Model: 5-60ml, 10-125ml, 25-250ml, 50-500ml, 100-1000ml, 250-2500ml, 500-5000ml

DGF

Automatic Filling Machine
自动灌装机

Ointment Filling Model 药膏填充型

Model/型号	DGF
Air pressure/气压	0.4-0.6MPa
Filling speed/填充速度	10-30bottles/min
Filling accuracy/填充精度	≤ ± 1%



FEATURES 特性

- ◆ This machine is the semi-automatic piston type filling machine.
- ◆ This machine has two filling heads in-phase, improving the work efficiency.
- ◆ This machine is reasonable in design, small and exquisite in model, vertical structure, saving the place, the pneumatic part adopts the pneumatic components of germany festo and taiwan airtac.
- ◆ The part conacting materials is made of 316L stainless steel.
- ◆ Both filling volume and filling speed can be adjusted at will, filling accuracy is high.
- ◆ Filling head adopts anti-leakage, anti-pull and with lifting filling device.
- ◆ Optional Model: 5-60ml, 10-125ml, 25-250ml, 50-500ml, 100-1000ml, 250-2500ml, 500-5000ml

Induction Sealing Machine
电磁感应封口机

FL2000
Continuous Model 连续型

Model/型号	FL2000
Power supply / 电源电压	110V 220 / 50-60Hz
Power / 功率	2KW
Capacity / 工作效率	80-20 pcs/min
Sealing diameter / 封口直径	Φ10-70mm
Vessel height / 容器高度	30-260mm
Machine size / 机器尺寸	450x600x1200mm(engine) 1800x4500x1200mm(conveyor)
Machine weight / 机器重量	90kg(engine) 80kg(conveyor)



FL1500
Continuous Model 连续型

Model/型号	FL500	FL1500
Power supply / 电源电压	110V 220 / 50-60Hz	110V 220 / 50-60Hz
Power / 功率	500W	<1500W
Capacity / 工作效率	12-30 pcs/min	0-10 pcs/min(conveyor)
Sealing diameter / 封口直径	Φ10-70mm	Φ20-50mm
Machine size / 机器尺寸	265x270x100mm	1150x480x400mm
Machine weight / 机器重量	4kg	38kg



FL500
Portable Model 手持型



FEATURES 特性

FL series portable induction sealing machine&Continuous induction sealing machine utilizes electromagneticinduction principle to produce instant high heat to melt aluminum foil that then adheres to the bunghole, teaching the aim of wet-proof, leakage-proof, mildew-proof and extending preservation time. Now it si widely used as sealing package machine in industries such pharmaceuticals, pesticides, lubricant and cosmetics etc. FL系列手持式电磁感应封口机及连续式电磁感应封口机是利用电磁感应的原理，产生瞬间高热，将铝箔片熔合在瓶口上，达到防潮、防漏、防霉等密封效果以及延长保存周期的目的。广泛应用于制药、农药、食品、润滑油、化妆品等行业之封口包装。

Locking & Capping Machine
多功能瓶盖锁口机

DK-50/Z
Plastic Cap Model 塑盖型

Model/型号	DK-50 / Z
Power supply / 电源电压	110V 220V / 50-60HZ 1Phase
Power / 功率	0.37KW
Diameter suitable / 适用直径	20-40mm
Sealing width / 适用盖高	10-35mm
Height of bottle / 适用瓶高	100-300mm
Sealing speed / 生产能力	1200Bottle / hr.
Type of cover / 适用盖型	塑料盖Plastic cover
Machine size / 机器尺寸	560 × 200 × 920mm
Machine weight / 机器重量	65kg



FEATURES 特性

DK-50Z Plastic Burglar-proof Cap Revolver is a kind of sealing Packaging machine specially designed for revolving plastic burglar-proof caps on the basis of the formerly-produced multifunction sealing machine and referring to the characteristics of various capping machines in the market. The machine enjoys such advantagtes as simple structure, stable sealing quality, convenient adjustment and easy maintenance. The matched swivel head for the machine is manufactured for standard plastic caps of Φ 30 mm. Users can customize it as required.

DK-50/D
Metal Cap Model 铁盖型

Model/型号	DK-50 / D
Power supply / 电源电压	1 10V 220V / 50-60HZ 1Phase
Power / 功率	0.37KW
Diameter suitable / 适用直径	15-46mm
Sealing width / 适用盖高	7-45mm
Height of bottle / 适用瓶高	50-320mm
Sealing speed / 生产能力	1200Bottle / hr.
Type of cover / 适用盖型	金属盖 Metal cover
Machine size / 机器尺寸	560 × 200 × 920mm
Machine weight / 机器重量	68kg



DK-50 / D Automatic Bottle-cap Locker is one series of sealing packing mechanical equipment made by our company. It is applicable for metal safeguard cap, ring-pull cap and aluminum sealing cap of all kinds of glass, plastic and polyester bottles as well as the sealing and pressed screw thrad of nozzle caps. It is the essential production equipment for such manufacturers as beverage, chemical industry, medicine and cosmetic.

自动立式 & 枕式包装机



DXDK80C

Granule Packing Machine
颗粒包装机

Granule Model 颗粒型

Model/型号	DXDK80C
Power supply / 电源	220V 1.1KW
Capacity / 包装容量	1-100ml
Packing speed / 包装速度	40-60bags/min
Bag size / 制袋尺寸	L(40-150mm)
	W(30-100mm)
Machine weight / 重量	200kg
Machine size / 机器尺寸	600x680x1600mm

FEATURES 特性

- ◆ This machine is widely used to pack any loose, non adhesive, small granule production or the food, pharmaceutical, and chemical industries, such as soup mix, coffee, instant. Drink maxi monosodium glutamate, oal meal, detergent powder, etc
- ◆ Packing material: Paper / pe pet / al. foil / pe nylon / pe tealeaf filtering paper&etc.
- ◆ Seal Type: It can automatically pack bound on three sides, four sides or pillow.
- ◆ Options: Hot stamp / ribbon printer

DXDF60C

Granule Packing Machine
颗粒包装机

Powder Model 粉剂型

Model/型号	DXDF60C
Power supply / 电源	220V 1.1KW
Capacity / 包装容量	1-100ml
Packing speed / 包装速度	40-60bags/min
Bag size / 制袋尺寸	L(40-150mm)
	W(30-100mm)
Machine weight / 重量	200kg
Machine size / 机器尺寸	600x680x1600mm

FEATURES 特性

Control system with Chinese, English display screen, stainless steel body, after the parameters (filling amount and length of bag) are set at the display setting unit, the control system will automatically optimize and match the actions. thus achieving best packing speed, Reliable and stable dual light source photoelectric check detective system, assuring complete logoof the packing bags. Controlled by intelligent temperature controller, automatic measuring, bag making, filling, Sealing, marking, cutting and counting.



BAF-50K

Auger filling machine with online weigher
称重式螺杆充填包装机

Standard Model 标准型

Model/型号	BAF-50K
Packing Weight/包装重量	1kg - 50kg
Packing Accuracy/包装精度	1 - 20kg, ≤ ± 0.1-0.2%, >20kg, ≤ ± 0.05-0.1%
Packing speed/包装速度	2 - 25 time per min
Power Supply/电源	3P AC380 - 415V 50/60Hz
Total Power/整机功率	3.2 Kw
Total Weight/整机重量	500kg
Overall Dimension/整机体积	1130 × 950 × 2800mm
Hopper Volume/料箱容积	100 L

FEATURES 特性

该机主要针对容易扬尘的超细粉末及高精度的包装要求而开发设计，根据装在容器下面的重量传感器给出的信号完成双速充填、计量及升降等工作，适用于包装添加剂、碳粉、灭火器干粉、其它超细粉末、及有高精度包装要求的粉末等。 This model is designed mainly for the fine powder which easily to spout dust and high-accuracy packing requirement. Based on the feedback sign given by below weight sensor, this machine do measuring, two-filling , and up-down work ,etc. It is specially suitable for filling additives, carbon powder, dry powder of fire extinguisher, and other fine powder which needs high packing accuracy.

- ◆ 容器托盘下装有重量传感器，根据预先设定的重量进行快速和慢速充填，保证高包装精度。
Weight sensor is below the tray, to do fast filling and slow filling based on the pre-set weight, to guarantee the high packaging accuracy.
- ◆ 伺服马达带动托盘升降，升降速度可任意设定，充填时基本上无粉尘扬起污染环境。
Servo motor does up-down work driving with tray together, the up-down rate can be set randomly, no dust spouts out when filling.
- ◆ 伺服马达及伺服驱动控制螺杆，性能稳定、精度高。
With servo motor and servo drive controlled auger, perform stably, and with high accuracy.
- ◆ PLC控制、触摸屏人机界面显示，操作简便。
PLC control, touch screen display, easy to operate.
- ◆ 全不锈钢结构；组合式料箱，清洗十分方便。
Made of stainless steel, combined hopper, easily to be cleaned.
- ◆ 充填头配有手轮调整高度，轻松实现多种规格包装。
With handwheel to adjust the height , easy to fill many kinds of weight.
- ◆ 固定式螺杆安装结构，充填时不会影响物料性质。
With fixed screw installation, the material quality won' t be effected.
- ◆ 工作流程：人工套袋或人工放罐→容器升高→快速充填，同时容器下降→重量达到预量值→慢速充填→重量达到目标值→人工取出容器。
Process: put bag/can(container) on the machine → container raise → fast filling, container declines → weight reaches the pre-set number → slow filling → weight reaches the goal number → take the container away manually
- ◆ 气动夹袋装置和托罐装置可供选择，只需选择不同装置，即可满足罐装和袋装要求。
Note: the pneumatic bag-clamp equipment and can-hold set is optional ,they are suitable for can or bag filling separately.



BVP420F

Powder Vertical Packing Machine

立式粉剂包装机

Standard Model 标准型

FEATURES 特性

- ◆English and Chinese screen display ,operation is simple .
- ◆PLC computer system , function is more stable , adjustment any parameters not need stop machine.
- ◆It can stock ten dispose , simple to change variety.
- ◆Sever motor drawing film , position accurately.
- ◆Temperature independent control system ,precision get to ± 1℃.
- ◆Horizontal , vertical temperature control ,suitable for various of mix film , PE film packing material.
- ◆Packing type diversification , pillow sealing, standing type ,punching etc.
- ◆Bagmaking , sealing, packing, print date in one operation.
- ◆Work circumstance quiet, low noise.
- ◆中英文触摸屏显示，操作直观，简单。
- ◆PLC电脑控制系统，运行更稳定，可不停机调整任何参数。
- ◆可储存十组参数，更换品种更准确。
- ◆采用伺服电机拉膜，定位更准确。
- ◆独立温控系统，精确度可达±1℃度。
- ◆横、纵封温度独立控制，能良好的适用各种复合膜、PE膜等包装材料。
- ◆包装的款式多样化，背封、插角、连袋、冲孔等。
- ◆生产制袋，封口，包装，打印日期一次性完成。
- ◆工作环境清静，噪音小。



Model/型号	BVP420F	输送台型号	DB-130
Bag length/制袋长度	80-300mm(L)	输送高度	800mm
Bag width/制袋宽度	50-200mm(W)	输送台功率	40W
Max width of roll film/薄膜宽度	420mm	最大输送量	200mm/min
Packing speed/包装速度	5-60bags/min	外型尺寸	1300 × 430 × 890mm
Measuring range/计量范围	150-1200ml	计量方式	螺杆旋转充填式
Air consumption/气压	0.65MPa	包装重量	100-1000g
Gas consumption/耗气量	0.3m³/min	包装速度	10-30bags/min
Power voltage/电压	220V	电源	220V50-60HZ
Power/功率	2.2KW	包装精度	≤100g偏差(≤0.5-1g)100-1000g偏差(≤1%)
Dimension/外型尺寸	(L)1320mm × (W)950mm × (H)1360mm	秤量范围	100-1000ml
Machine weight/主机重量	540Kg	整机重量	800KG

BVP420F

Powder Vertical Packing Machine

立式粉剂包装机



- Technical characteristics:
1. The machine adopt servo motor control, screw measuring, precision ± 1%.
 2. Adjustment product weight without any tools.
- Application:
- Suitable packing powder : milk powder , bean powder ,etc.

- 技术要点：
- 1.本同采用伺服电机控制，螺杆计量方式，精密度可达±1%。
 - 2.调整产品重量无需任何工具。
- 适用包装范围：
- 适合包装粉剂：奶粉，豆粉，面粉，等一切粉类。

BAF500

Auto.Filling-Capping-Labelling System

自动罐装-旋盖-贴标包装线

FEATURES 特性

- ◆全不锈钢结构；组合式透明料箱，无需工具即可方便拆洗。
Stainless steel structure; The quick disconnecting hopper could be washed easily without tools.
- ◆伺服马达及伺服驱动控制螺杆。
Servo motor drive screw.
- ◆PLC、触摸屏及称重模块控制。
PLC, Touch screen and weighing module control.
- ◆各种产品调整参数配方可储存，备后使用，最多储存10个配方。
To save all product's parameter formula for later use, save 10 sets at most.
- ◆更换螺旋附件，能够适应超细粉到小颗粒等多种物料。
Replacing the auger parts, it is suitable for material from super thin powder to granule.
- ◆配有位置合理的高度调节手轮，方便调整机头高度。
Include handwheel of adjustable height.

FEATURES 特性

BAF500 粉剂罐装机

This Machine is a complete, economical solution to your filling production line requirements.can measuring and filling powder and granular. It consists of the Filling Head, an independent motorized chain conveyor mounted on a sturdy, stable frame base, and all necessary accessories to reliably move and position containers for filling, dispense the required amount of product, then quickly move the filled containers away to other equipment in your line (e.g., cappers, labelers, etc.).T fits more to the fluidic or low-fluidity materials, like milk powder, albumen powder, pharmaceuticals, condiment, solid drink, white sugar, dextrose, coffee, agriculture pesticide, granular additive, and so on.

BAF500该机是一款经济实用的粉末及小颗粒自动灌装机，能完成瓶子自动定位、充填及计量等工作，它由一台螺杆计量机、一台链板输送带及一个气动定位装置组成，可与理瓶机、旋盖机、贴标机等组成整套灌装流水线。适用于包装粉末、小颗粒药品、奶粉、兽药、调味品、粉粒状添加剂、葡萄糖、固体饮料、爽身粉、农药等。

本套设备是有：XZJ-2A送料理瓶机、BAF500粉剂罐装机、GX200高速旋盖机、ALB-510A自动贴标机组成。可以与本公司生产的标签收缩机、紫外线收缩炉配套使用。实现了自动化理瓶、灌装、封盖、贴标、收缩包装及杀菌的作用。此套设备可以根据不同的产品、不同的包装要求进行一定范围的调节。

BXG200

High Speed Capper

高速旋盖机

FEATURES 特性

Gx200 高速旋盖机

- ◆常用于各类旋转式螺纹盖、防盗盖的旋盖以及压合盖的压盖。
- ◆该机集自动理盖、旋盖于一体，通过三组旋盖轮先校正后旋紧，确保旋盖的正确无误；
- ◆带数码位置显示功能，可有效避免调节不到位造成的旋盖不紧；全中文界面触摸屏PLC控制，
- ◆并配有旋盖不良自动剔除装置。与瓶、盖接触的零件，采用无毒同步带和无毒耐磨硅胶符合GMP标准。
- ◆可选加压盖部件，完成压合瓶盖的工序。



Standard Model 标准型

Model/型号	BAF500	Model/型号	BXG200
Bag length/计量方式	Directly dosing by auger螺杆定量	Power Supply/电源	220V50-60HZ
Packing Weight/包装重量	1-500g	Total Power/整机功率	1.3KW
Packing Accuracy/包装精度	≤100g, ≤± 2%; 100-500g, ≤± 1%	Packing speed/包装速度	50-200bottles/min
Packing speed/包装速度	15-40bottles/min	Bottle diameter/瓶身直径	30-120mm
Power Supply/电源	3P AC220 - 415V 50/60Hz	Cap diameter/瓶盖直径	20-80mm
Total Power/整机功率	1.2KW	Machine Diameter/设备尺寸	1800×1000×1500mm
Total Weight/整机重量	160kg	Total Weight/整机重量	280kg
Overall Dimension/整机体积	1500×760×1850mm		/
Hopper Volume/料箱容积	35 L		另可根据客户要求定制
Air Supply/压缩空气	6kg/cm ² 0.05m ³ /min		/

DZB-300B

Multi-Function Pillow Type Packer
枕式自动包装机



Pillow Model 枕式型

Model/型号	DZB-300B
Power supply / 电源	220V 50-60Hz 3KW
Production capacity / 生产能力	50-350bags/min
Packing spec. / 包装规格	L40-130 × W20-100 × H1-35mm
Width of membrane / 薄膜宽度	300mm Max.
Gross weight/总重量	900kg
Machine size / 机器尺寸	4700 × 850 × 1550mm

FEATURES 特性

- ◆ Suitable for packing for lumpish goods medicine edition, wet wipes, card.
- ◆ Aim at color code quickly and accurately.
- ◆ Packing tight, sealed capability is good.
- ◆ Packing speed quickly.
- ◆ Falling materiel accurately.

可包装药版、湿纸巾、卡片等块状物品。
对标快速准确。
包装紧凑，密封性好。
包装速度快。
落料准确到位。

DZB-300W

Multi-Function Pillow Type Packer
枕式自动包装机



Pillow Model 枕式型

Model/型号	DZB-300W
Power supply / 电源	220V 50-60Hz 3KW
Production capacity / 生产能力	30-300bags/min
Packing spec. / 包装规格	L40-140 × W20-100 × H1-35mm L100-300 × W40-140 × 20-70mm
Width of membrane / 薄膜宽度	450mm Max.
Gross weight/总重量	870kg
Machine size / 机器尺寸	L4700 × W1000 × H1550mm

FEATURES 特性

- ◆ Autonomic microcomputer control, automatically display length, count, fault, etc...
- ◆ Operation shortcut and convenient, distinct efficiency.
- ◆ High precision, strong sealing performance, high stability.

微电脑自动控制，自动显示长度、计数、故障等。
操作快捷方便，效果显著。
高精度，高密度，高稳定性。

Printing&Labeling Machine

印码机&贴标机

PRINTING&LABELING MACHINE
PRINTING&LABELING MACHINE
PRINTING&LABELING MACHINE
PRINTING&LABELING MACHINE
PRINTING&LABELING MACHINE
PRINTING&LABELING MACHINE
PRINTING&LABELING MACHINE
PRINTING&LABELING MACHINE
PRINTING&LABELING MACHINE
PRINTING&LABELING MACHINE



MY-380

Solid-ink Coding Machine

固体墨输标示机

Coding Machine 标示机

Model/型号	MY-380
Power supply / 电源电压	110V 220-240V/ 50-60Hz
Power / 功率	180W
Ink roller size / 墨轮尺寸	35 × 32mm
Printing speed / 印字速度	300pcs/min.
Object size / 被印物尺寸	L:55-500mm W:30-300mm
Letters number / 印字数量	5lines 10letters per line Max.
Machine weight/机器重量	23kg
Machine size / 机器尺寸	440 × 340 × 260mm



FEATURES 特性

MY-380 coding machine is a kind of special label printing equipment, and suitable for printing labels on the surface of paper, nonferrous plastic film and aluminum foil. It adopts cantilever type mechanism, light and precise. Its lengthways-printing position is controlled by electronical device, and can be adjusted discretionarily. Moreover, it uses advanced solid-ink roller for printing, which has six colors for choice, such as black, red, yellow, blue, white and green, and can make the words be printed clearly and uneasy to erase and change.

MY-300

Solid-ink Coding Machine

固体墨输标示机

Coding Machine 标示机

Model/型号	MY-300
Power supply / 电源电压	110V 220-240V/ 50-60Hz
Power / 功率	180W
Ink roller size / 墨轮尺寸	35 × 32mm
Printing speed / 印字速度	300pcs/min.
Object size / 被印物尺寸	L:55-500mm W:30-300mm
Letters number / 印字数量	5lines 10letters per line Max.
Machine weight/机器重量	23kg
Machine size / 机器尺寸	440 × 340 × 260mm



FEATURES 特性

- ◆ Low noise: the working noise less 65db
- ◆ Equip with the wearability steel Word, accurate Word and clean handwriting
- ◆ Use for ink printing, cut off the ink system, it can print the steel words
- ◆ Use for ink printing, instant printing and dry, not easy to remove
- ◆ Suitable for printing the lot number, date and validity on medicine, food, daily-use chemical and hardware etc.

- ◆ 噪音及小, 工作噪音不超过65db
- ◆ 配有耐磨的钢字、印字精确、字迹清晰
- ◆ 用于油墨打印, 切断油墨系统, 即能打印钢字
- ◆ 用于墨轮打印, 瞬印瞬干, 不易擦除之优异性能
- ◆ 最适合医药、食品、日化、五金等行业标到、纸盒打印批号、日期、有效期限等

DDYM

Pad Printing Machine

电动油墨移印机

DDYM-520

Pad Printing Model 移印型

Model/型号	DDYM-520
Power supply/ 电源	110V 220-240V/ 50-60Hz 1Phase
Printing speed/ 打印速度	0-60times/min
Printer height/ 印件高度	0-300mm
Mould size/ 模板范围	80 × 100mm
Machine weight/ 机器重量	40kg
Machine size/ 机器尺寸	600 × 380 × 610mm



DDYM-520A

Ink-cup Model 油杯型

Model/型号	DDYM-520A
Power supply/ 电源	110V 220-240V/ 50-60Hz 1Phase
Printing speed/ 打印速度	0-60times/min
Printer height/ 印件高度	0-300mm
Mould size/ 模板范围	85 × 175mm
Machine weight/ 机器重量	40kg
Machine size/ 机器尺寸	600 × 380 × 610mm



HP-241B/C

Electronic Model 电动型

Model/型号	HP-241B/C
Power supply/ 电源电压	110V, 220-240V/ 50-60Hz 200W
Letters number/ 印字数量	two line 30 numbers three lines 45 numbers
Temperature/ 工作温度	0-300℃
Machine weight/ 机器重量	15kg
Machine size/ 机器尺寸	355 × 340 × 525mm



FEATURES 特性


DDYM series pad printing machine can be used for printing production date, validity date, batch number on the metal, plastic, glass, nylon, film material objects, as well as small commodity trademark, pattern, word and bar-code.

DDYM系列电动油墨移印机适用于生产日期、批号、有效日期及小商品的商标、图案、文字、条码的打印；可打印在金属、塑料、玻璃、尼龙、薄膜等材质的物体上。

Colored-Tape Hot Printer
色带打码机

HP-241
Electronic Model 电动型

Model/型号	HP-241
Power supply / 电源电压	110V 220-240V/ 50-60Hz 200W
Letters nmber / 印字数量	One line 15 numbers Two lines 30 numbers
Temperature / 工作温度	0-300℃
Machine weight/机器重量	15kg
Machine size / 机器尺寸	410 × 195 × 245mm

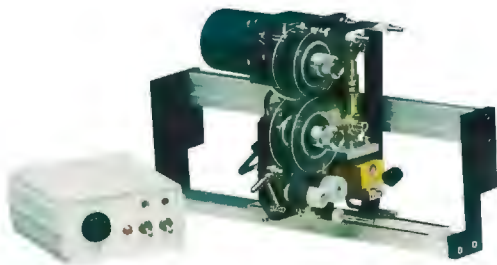

MS-200
Rubbed Model 摩擦型

Model/型号	MS-200
Power supply / 电源电压	220V/ 50Hz 50W
Letters nmber / 印字数量	Five lines 15 numbers each line
Temperature / 工作温度	0-300℃
Print Speed / 打印速度	20-200times/min
Width of Film / 包装膜尺寸	Max. 450mm
Machine weight/机器重量	13kg
Machine size / 机器尺寸	630 × 320 × 170mm



HP-351
Hand Model 手动型

Model/型号	HP-351
Power supply / 电源电压	220V/ 50Hz 40W
Letters nmber / 印字数量	three lines 45 numbers
Temperature / 工作温度	0-200℃
Machine weight/机器重量	2.5kg
Machine size / 机器尺寸	225 × 200 × 155mm



FEATURES 特性

- ◆ The color-tape hot printer use color tape to replace ink roller printing, it can print any soft packing materials with clear printing, and easy to dry and without sticking, convenient to change letters.
- ◆ 特别适用于食品、医卫等行业使用——采用热印带宽除油墨污染之忧，保证手和机器卫生、干净
- ◆ 印字清晰——采用热打印带，无需干燥，印字清晰
- ◆ 任何包装材料OK-PT、PE、OPP、CPP、热收缩标、铝箔、纸等
- ◆ 换字方便——采用特殊的换字结构，活字装卸特别方便
- ◆ 使用简单——合理的设计、精密的加工、高品质的质量令用户放心，保养方便

Industrial Lnk Jet Printer
喷码机

Model/型号	SOP-810
Printing lines/喷印行数	1-4 lines (can be adjusted)
Height of letter/字体高度	1-15mm(can be adjusted)
Speed of print/喷印速度	3m/s(single line 5 × 7)
Power/功率	50W
Power supply/电源电压	220V ± 10% VAC, 50Hz
Machine size/机器尺寸	585mm × 470mm × 270mm
Machine weight /机器重量	48kg

FEATURES 特性

- ◆ 采用国际先进的内置泵技术，墨水泵、溶剂泵、回收泵、循环泵四泵一体设计，
 - ◆ 无需外接气源，自动化程度高，耗材仅是传统气源式的10%~20%。
 - ◆ 采用国际先进的喷嘴三重防堵技术，独立的清洗程序，可彻底解决堵塞问题。
 - ◆ 采用国际先进的墨路系统设计，拥有多项墨路系统的处理程序，机器运行更加稳定，方便维护。内置汉字库和直接点阵编辑功能，操作更方便。
 - ◆ 具有喷印三行组合和两行标准汉字（12 × 12）和图案防伪功能，灵活的行列选择，字体更美观，功能更强大。
 - ◆ 可与计算机对接的乱码喷印功能，可接收电脑编制的BMP图案，具有编码同步、光电同步、同步器同步定距、在线一次检测N次喷印功能。
- SOP810 industrial ink jet printer adopts advanced international print technique , based on successfully using the research result of printer for many years, it makes completed optimized innovation design for the stability control system of printer equipment, circulation system of air channel and ink channel, operation system of human-machine interface, and fuses withunique adhesive control technique, micro solenoid strong cleaning setting, multi-function soft system supporting , precise prey head design to make sure credible running. The letterform is more beautiful, saving and more convenient operation and maintenance. The products widely used for non-touch printer for drink, food, medicine, chemical, industry, architectural, material , electronic products.

生产日期:2000/09/18
保质日期:2003/09/18
△合格 P2000/12/28
△合格 E2003/12/28

喷印效果放大图



MJ-CO-X-30C/MJ-CO-X-30CX

二氧化碳高速激光打标机
Carbon Dioxide High Speed Laser Machine



FEATURES 特性

- 设计灵活万向调节装置的激光头更简单，满足任何方位，任意角度标刻
- ◆ 采用最新的ARM-3517控制芯片，Linux操作平台，运行速度更快，功能更强大
 - ◆ 可实现超长打标图文的连续编辑和连续打标
 - ◆ 可更多的考虑客户需求，提供产品定制服务，通过触摸屏实现远程控制
 - ◆ 打标记忆功能和纠错功能，能实现每个产品打标的为止的精确
- Design flexibility, the laser head with universal control apparatus is simple, and satisfy any much more faster and the function more powerful. Adopting the latest arm-3517 control chip, linux operating deck, which makes the speed much more faster and the function more powerful. It achieves continuous editor and marking of over length marking image-text.
- Giving more consideration to customer demand, provide product customization service, achieve remote control by touch screen.
- Marking memory function and error correction, which realize the precision of marked object's postion.



ALB-510A

ALB Series Labeling Machine
全自动圆形贴标机



FEATURES 特性

- ◆ “Mitsubishi” PLC control system, “e-view” touch screen operation interface/ “三菱” PLC控制系统，人机触摸屏操作；
- ◆ “Schneider” servo motor control labeling head/ “施耐德” 伺服电机控制贴标头；
- ◆ Germany “Leuze” label sensor for normal self-adhesive label/采用德国原装进口 “劳易测” 标签感应；
- ◆ With bottle separating device/带分瓶装置；
- ◆ Stainless steel machine construction/不锈钢机身结构；

Standard Model 标准型

Model/型号	ALB-510A	ALB-510C	ALB-210
Power/电源电压	1 Phase, 220V /50-60Hz	1 Phase, 220V /50-60Hz	1 Phase, 220V /50-60Hz
Label Height/标签高度/宽度	10-110mm	10-170mm	10-170mm
Label length/标签长度	10-300mm	10-300mm	10-250mm
Bottle Diameter/产品直径/厚度	25-100mm	25-100mm	15-160mm
Conveyor Width/输送带宽度	152.4mm	152.4mm	/
Labeling speed/贴标速度	12-35m/min	12-35m/min	12-35m/min
Paper Core Diameter/纸卷内径/外径	760mm/360mm以内	760mm/360mm以内	760mm/360mm以内
Machine Diameter/设备尺寸	L2010×W1110×H1550mm	L2010×W1110×H1550mm	L1450×W700×H1550mm

A600

Automatic Labeling Machine
全自动纸箱贴标机



FEATURES 特性

- ◆ 拍压-吹气式贴标
高速长寿命气动拍压贴标臂,真空式贴标板，可对贴标面非接触吹标,贴标压力传感器和掉标检测传感器可选,自动检测并触发打印贴标作业，适用于顶面、侧面或底面贴标
- ◆ 高性能
最快每分钟60次打印贴标,贴标精度± 1 mm,工业级打印引擎，极高的打印质量和可靠性,即打即贴模式，彻底杜绝赋码、打印、数据关联和贴标差错.7x24 小时连续、高速、全自动打印贴标
- ◆ 智能化
嵌入式工控电脑，集成化的贴标动作控制和打印数据处理,内置打印贴标控制软件，可配置、调试、监控并自动记录打印贴标机运行，与PLC、条码扫描器、机器视觉、称重、检测等设备实时通讯,用户自定义条码标签模板和变动数据源,通过ODBC、XML或其它数据接口，可无缝集成到ERP等主系统

Standard Model 标准型

Model/型号	A600
Power/电源电压	100-240 V 单相交流，50-60 Hz，300W
Label height/贴标模式	拍压-吹气式
Label length/静态贴标精度	± 1
Bottle diameter/标准贴标行程	280mm
Conveyor width/最小贴标尺寸	25 × 25 mm
Labeling speed/贴标速度	60 张/分钟
Air supply/设备供气	压力>0.6 Mpa, 流量>90L/min
Machine diameter/设备尺寸	L750mm x W480mm x H550mm



APMD-6030/APMD-3012/APCW-1000

Metal Detector & Check Weigher

金属探测仪和重量检测仪



Metal Detector



Metal Detector + Check Weigher

Application

For Food, Cosmetic toy...etc.

Technical Features:(Check Weigher)

- 1.Apply advance digital signal processing and realize high speed and stable weighing.
- 2.Special frame structure enables it to keep accuracy when working.
- 3.With liquid crystal and tangibly screen, it is easy to operate.
- 4.With strong data statistic function, it can memorize each data.
- 5.To use the delivery belt with coming away and removing, easy to maintain.
- 6.Self-diagnosis function can show the mistake when the Rom./Ram and A/D photoelectric coll comes exceptional.
- 7.Five standard weight subarea can deposit 10 group of product database.

Technical Features:(Metal Detector)

- 1.Max. aperture size:600mm×300mm
- 2.With Stainless steel case
- 3.With 1.5M conveyor
- 4.With reject system
- 5.With alarm system and Indication lamp
- 6.With conveyor stop function
- 7.Sensitivity:0.6mm Fe
- 8.Max. Loading:25kg



Check Weigher

技術參數(Technical parameters)

Model No. 型號	APMD-6030	APMD-5030	APMD-4020	APMD-4018	APMD-3012
Working Height 通過高度	300	300	200	180	120
Belt Working Width 皮帶寬度	600	500	400	400	300
Running Precision 測量精度	Fe1.5mm SUSΦ2.8mm	Fe1.4mm SUSΦ2.7mm	Fe1.2mm SUSΦ2.5mm	Fe0.8mm SUSΦ2.0mm	Fe0.7mm SUSΦ1.8mm
Optional Rejecter 可選剔除裝置	1.氣動推杆剔除法 (標準) 2.吹氣剔除法3.撥杆剔除法 4.升降皮帶式剔除法 1. Cylinder pusher (standard) 2. Air blast 3. Swing arm 4. Belt drop				

Model No. 型號	APCW-1000				
Weight 重量	10~99g	100~200g	201~400g	401~999g	1000~10000g
Speed 速度(包/分)	65	55	50	45	40
Precision (g) 精度	±0.5	±0.6	±0.8	±1	±2
Minum scale (g) 最小刻度	0.1	0.1	0.1	0.1	1
Overall size 機體尺寸	1050(L)*681(W)*1260(H)mm				
Optional Rejecter 可選剔除裝置	1.撥杆剔除法 (標準) 2.氣動推杆剔除法3.吹氣剔除法4.升降皮帶式剔除法1. Swing arm (standard) 2. Cylinder pusher 3. Air blast 4. Belt drop				

Tool&Material

工具&包装材料

TOOL&MATERIAL
TOOL&MATERIAL
TOOL&MATERIAL
TOOL&MATERIAL
TOOL&MATERIAL
TOOL&MATERIAL
TOOL&MATERIAL



Hand Pallet Truck

手动液压搬运车

FEATURES 特性

- ◆ The oil pump body is made by assembling the separated prefabricated parts using threaded connection.
- ◆ All the joints are fitted with seals to ensure sealing and keep the body from oil leaking
- ◆ Foot and hand controls operate the lowering function ensures easy operation.
- ◆ Speed lowering valve can adjust the descent speed freely.
- ◆ 210 degrees steering area add to maneuverability.
- ◆ Number of pump strokes-12, lift height per stroke: 9.5mm.
- ◆ Option: nylon wheel, polyurethane wheel, rubber wheel, single fork roller or tandem fork rollers.

TL-A

Hand Pallet Model 手抓型

Model/型号	TL-A/TL-B
Capacity/额定起重量	2000-2500kg
Lowered fork height/下降高度	85 / 75mm
Total lift height/起升高度	200 / 190mm
Fork length / 货叉长度	800, 900, 980, 1000, 1100, 1150, 1220mm
Width over the forks / 货叉宽度	520, 550, 685mm
Steering wheel/后轮外径	φ 200 / φ 180
Fork wheel / 前轮外径	φ 80 / φ 74
Self weight / 自重	75-102kg



TL-B

Hand Pallet Model 手抓型

- ◆ The oil pump body is made by die casting decrease leak possibility.
- ◆ Safety by-pass valve helps protect against overload.
- ◆ Excellent turning angle 180 degrees facilities.
- ◆ Number of pump strokes-10, lift height per stroke: 11mm.
- ◆ Option: nylon wheel, polyurethane wheel, rubber wheel single fork roller or tandem fork rollers.

CTY

Hand Pallet Model 插腿型

Model/型号	CTY0.5M1.6	CTY1M1.6	CTY1.5M1.6
Capacity/额定起重量	500kg	1000kg	1500kg
Total lift height/起升高度	90-1600mm	90-1600mm	90-1600mm
Fork length / 货叉长度	1150mm	1150mm	1150mm
Width over the forks / 货叉宽度	560mm	560mm	560mm
Total lift speed / 起升速度	≥ 20mm / time	≥ 16mm / time	≥ 12mm / time
Steering wheel/后轮外径	150mm	150mm	150mm
Fork wheel / 前轮外径	80mm	80mm	80mm
Self weight / 自重	160kg	223kg	246kg
Dimensions / 外形尺寸	1650×630×1970mm	1650×680×2020mm	1650×690×2070mm

- ◆ 下降自动限速装置
- ◆ 安全保护万向轮
- ◆ 空载脚踏快升装置



Material

包装材料



PP Strap 打包带

Pp捆扎带用于纸箱打包，配合自动打包机使用。优点：可塑性好，断裂拉力强，耐弯曲疲劳，密度小，拉伸冲击性能佳，使用方便等。


PP strapping band is used with automatic packing machine for carton packaging. Advantages: good plasticity, fracture strong tension, bending fatigue resistance, low density, high tensile impact performance, convenient use, etc.



PE Film PE膜

Pe收缩膜具有拉伸强度高，延伸率大、自粘性好，透明度高等特点。被广泛使用在外贸出口、造纸、五金、塑料化工、建材、食品医药行业。


PE shrinkable film has high ductility, good self-adhesiveness, high transparency and other outstanding characteristics. It is widely used in foreign export, paper making, metal, plastic, chemical, building materials, food and pharmaceutical industries.

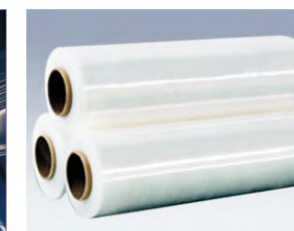

POF Film POF膜

POF特点：无毒环保、高透明度、高收缩率、良好的热封性能，高光泽度、强韧性、抗撕裂、热收缩均匀及适合全自动高速包装等特点。

Characteristics of POF: non-toxic, environmentally friendly, high transparency, high shrinkage rate, good heat sealing performance, high glossiness, high flexibility, tearing resistance, even heat shrinkage, suitable for high speed automatic packaging.

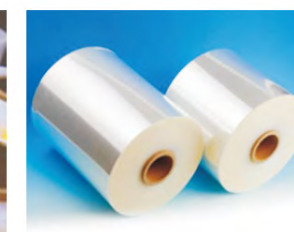

PVC Film PVC膜

PVC热收缩膜特点是透明度高、易收缩、强度高、收缩率可以根据用户需要自由调整，可操作性强。是目前较为理想的薄膜包装材料。

PVC heat shrinkable film is characterized by good transparency, easy shrinkage, high strength, adjustable shrinkage rate and good operability. It is the ideal film packaging material.

