



Ø 20/22
**Clip für Direkt- und Leiterplattenmontage
 Clip for Direct- and PCB-mounting**

61002 01.3

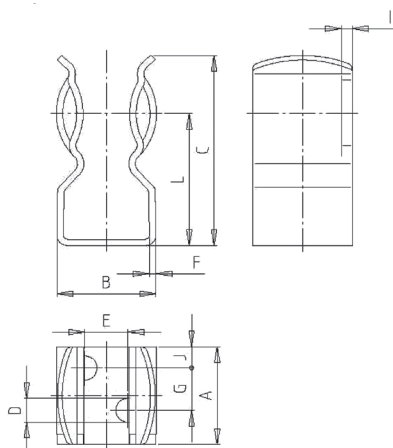


63 002 01

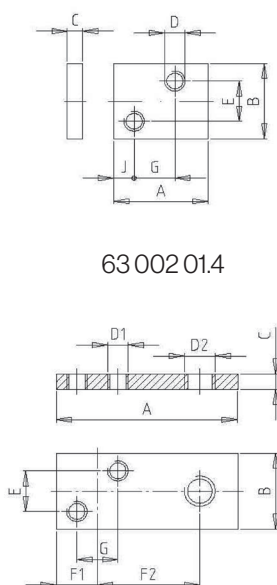

63 002 01.4

58 060 06

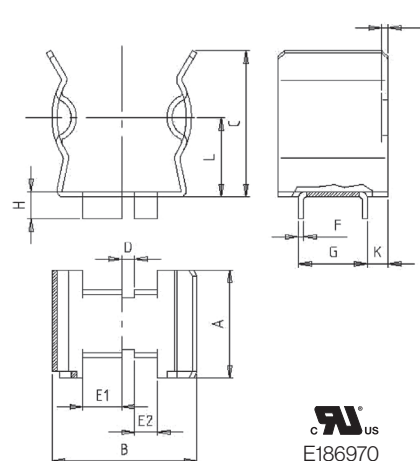
 C_{UL}®
 E186970

Verpackungseinheit / Packing unit:	100 Stück / 100 pieces	100 Stück / 100 pieces	100 Stück / 100 pieces	1000 Stück / 1000 pieces
IEC 60269-2	Anschraubclip Fuse-Clip Screw Mountable 61002 01.3	Anschraubplatte Clamping Plate 63 002 01	Anschraublasche Terminal Link 61002 01.4	Einlötlclip Fuse-Clip PCB Mountable 58 060 06
IEC 60269-3	20,6 x 127 mm / 22 x 58 mm			
IEC 60269-4	Bemessungsleistungsaufnahme 12 W / Rated Power Acceptance 12 W			
	Kupferlegierung CuSn, vernickelt / Copper alloy CuSn, nickel-plated	Kupferlegierung CuSn, vernickelt / Copper alloy CuSn, nickel-plated	Kupferlegierung CuSn, vernickelt / Copper alloy CuSn, nickel-plated	Kupferlegierung CuSn, verzinnt / Copper alloy CuSn, tin-plated
A	18,5 mm	18,5 mm	35,5 mm	17,0 mm
B	18,4 mm	15,0 mm	15,0 mm	20,0 mm
C	36,0 mm	3,0 mm	3,0 mm	23,0 mm
D	4,5 mm	M4	–	2,0 mm
D1	–	–	M4	–
D2	–	–	M6	–
E	8,0 mm	8,0 mm	8,0 mm	–
E1	–	–	–	6,0 mm
E2	–	–	–	3,5 mm
F	1,2 mm	–	–	0,8 mm
F1	–	–	7,5 mm	–
F2	–	–	8,0 mm	–
G	8,0 mm	8,0 mm	8,0 mm	10,7 mm
H	–	–	–	4,2 mm
I	2,0 mm	–	–	1,0 mm
J	4,0 mm	4,0 mm	–	–
K	–	–	–	3,5 mm
L	25,0 mm	–	–	12,5 mm
Gewicht/Weight kg/1	0,020	0,010	0,012	0,008