

# ADL10-E



## General

ADL10-E single phase electric meter is designed for single phase energy measurement on low voltage system. The meter meet the related technical requirements of electronic meter in the IEC62053-21, IEC62053-22 standards.

## Product Functions

Function	Description	Provide
Measurement of kWh	Single-phase active energy (positive and negative)	■
Measurement of electrical parameters	U, I, P, Q, S, PF, Hz	■
LCD Display	8 digits	■
Communication	RS485, MODBUS-RTU	□C

Note: (■: standard; □: optional)

## Technical Parameter


### ■ Electric performance

Voltage	Reference voltage	220V
	Reference frequency	50Hz
	Consumption	<10VA (Single phase)
Current	Maximum current	60A
	Starting current	0.004lb
	Consumption	<4VA (Maximum current)
Measurement performance	Standards compliant	IEC 62053-21:2003
	Accuracy of Active kWh	Class 1

### ■ Working environment

Temperature	Operating	-25°C~55°C
	Storage	-40°C~70°C
Humidity	≤95%(No condensation)	
Altitude	<2000m	


## Dimension drawings (Unit: mm)

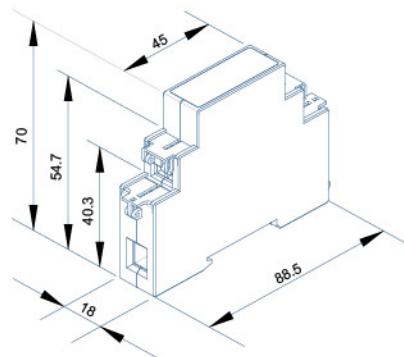


Note: The torque should not be greater than 4.0 N·m

## Wiring and installing

### ■ Wiring

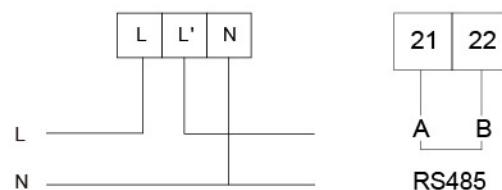

### ■ Installing

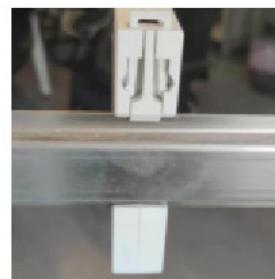

ADL10-E installing

Note: DIN 35 mm rail installation.

## Display examples

The meter shows total energy first while turning on and then shows voltage, current and power, etc. in turn. The example shows as following:



Energy

**U** 220.0 V

Voltage

**I** 0.000 A

Current

**P** 02.20 kW

Power

**PF** 0.00

Power factor

**E0En9600**

Even test, baud rate 9600

**Addr 001**

Address

**d0S0 000**

Firmware Version