

4-72

离心风机
Centrifugal fan

产品简介 Product Brief

- 风量大、振动小、噪音低。激光切割下料,大大提高产品精度,造型美观大方。
- 电机采用YE系列高效节能电机，高效率、低能耗、质量好、寿命长。
- 广泛应用于工矿企业、大型建筑、工厂、宾馆酒楼等室内外通风换气。
- 特别适用于采暖炉、热风炉、干燥、化工、食品、粮食机械等相关行业。
- 可选配耐高温型加长轴电机，耐高温200℃。


- Large air volume, low vibration and low noise. Laser cutting blanking greatly improves the accuracy of the product, and the shape is beautiful and generous.
- YE series of high-efficiency and energy-saving motors are used in the motor, with high efficiency, low energy consumption, good quality and long service life.
- Widely used in industrial and mining enterprises, large buildings, factories, hotels, restaurants and other indoor and outdoor ventilation.
- Particularly suitable for heating furnace, hot blast stove, drying, chemical industry, food, grain machinery and other related industries.
- Optional high temperature resistant extended shaft motor, high temperature resistant 200℃.

主要参数 Main parameter

型号 Model	功率 Power kw	电压 Voltage V	频率 Frequency Hz	转速 Speed r/min	流量 Flow m³/h	全压 Total Head Pa
4-72 2.5A	0.75KW-2	380	50	2830	785-1550	750-455
	1.1KW-2	380	50	2830	805-1677	792-483
4-72 2.8A	1.5KW-2	380	50	2840	1131-2356	994-606
4-72 3.2A	1.1KW-4	380	50	1450	884-1758	324-198
	2.2KW-2	380	50	2840	1688-3517	1300-792
4-72 3.6A	1.1KW-4	380	50	1450	1332-2634	393-247
	3KW-2	380	50	2870	2664-5268	1578-989
	4KW-2	380	50	2890	2850-5500	1686-1030
4-72 4A	1.1KW-4	380	50	1450	2006-3709	501-329
	5.5KW-2	380	50	2900	4012-7419	2014-1320
4-72 4.5A	1.1KW-4	380	50	1450	2856-5281	634-416
	7.5KW-2	380	50	2900	5712-10562	2554-1673
4-72 5A	2.2KW-4	380	50	1450	3864-7728	790-502
	11KW-2	380	50	2900	7228-13500	2890-1856
	15KW-2	380	50	2900	7728-15455	3187-2019
4-72 5.6A	3KW-4	380	50	1450	7062-9885	975-759
4-72 6A	4KW-4	380	50	1450	6677-13353	1139-724
	1.5KW-6	380	50	960	4420-8841	498-317

Energy Power Save CO.,LTD.

安装尺寸 Installation dimension

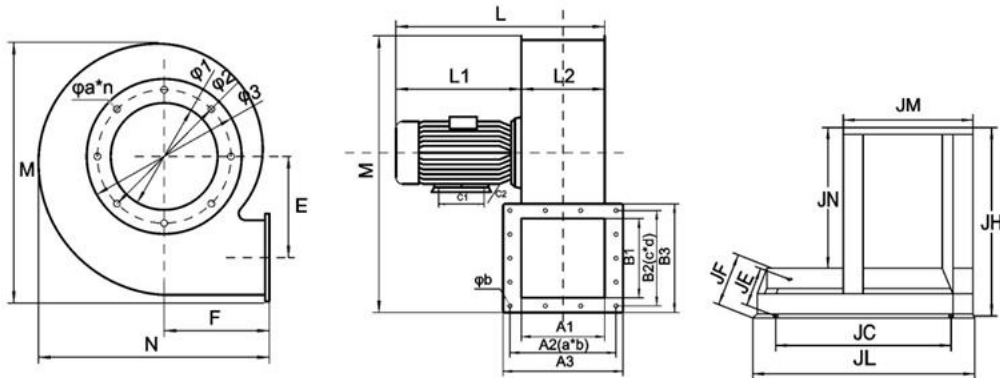

型号 Model	功率 Power	出风口尺寸 Outlet flange size								进风法兰尺寸 Inlet flange dimensions				
		A1	A2	A3	a*b	B1	B2	B3	c*d	Φb	Φ1	Φ2	Φ3	Φa*n
4-72 2.5A	0.75KW-2	165	199	230	3*100	200	235	265	3*68	Φ10	255	280	305	Φ10*8
	1.1KW-2	165	199	230	3*100	200	235	265	3*68	Φ10	255	280	305	Φ10*8
4-72 2.8A	1.5KW-2	197	231	272	3*77	214	256	282	4*64	Φ10	278	312	335	Φ11*8
4-72 3.2A	1.1KW-4	216	252	291	3*84	246	284	310	4*71	Φ10	315	352	376	Φ11*8
	2.2KW-2	216	252	291	3*84	246	284	310	4*71	Φ10	315	352	376	Φ11*8
4-72 3.6A	1.1KW-4	252	291	332	3*97	275	312	340	3*104	Φ10	360	390	413	Φ11*8
	3KW/4KW-2	252	291	332	3*97	275	312	340	3*104	Φ10	360	390	413	Φ11*8
4-72 4A	1.1KW-4	285	315	340	4*79	325	360	388	5*72	Φ11	400	437	465	Φ12*16
	5.5KW-2	285	315	340	4*79	325	360	388	5*72	Φ11	400	437	465	Φ12*16
4-72 4.5A	1.1KW-4	320	350	380	4*88	360	395	425	5*78	Φ11	440	492	520	Φ13*16
	7.5KW-2	320	350	380	4*88	360	395	425	5*78	Φ11	440	492	520	Φ13*16
4-72 5A	2.2KW-4	358	385	416	4*97	400	440	468	4*109	Φ11	490	540	565	Φ13*16
	11KW/15KW-2	358	385	416	4*97	400	440	468	4*109	Φ11	490	540	565	Φ13*16

型号 Model	功率 Power	外形尺寸 Outline size										脚架尺寸 (选配) Scaffold size (optional)							
		L	L1	L2	M	N	E	F	C1	C2		JM	JN	JH	JL	JC	JF	JE	
4-72 2.5A	0.75KW-2	420	255	165	476	410	174	175	100	125		200	280	320	395	310	300	260	
	1.1KW-2	420	255	165	476	410	174	175	100	125		200	280	320	395	310	300	260	
4-72 2.8A	1.5KW-2	477	275	202	565	471	198	207	100	140		200	280	320	395	310	300	260	
4-72 3.2A	1.1KW-4	522	300	222	643	538	228	234	125	140		200	280	320	395	310	300	260	
	2.2KW-2	522	300	222	643	538	228	234	125	140		200	280	320	395	310	300	260	
4-72 3.6A	1.1KW-4	533	275	258	711	597	251	256	100	140		280	335	375	470	300	355	320	
	3KW/4KW-2	583	325	258	711	597	251	256	140	160		280	335	375	470	300	355	320	
4-72 4A	1.1KW-4	560	275	285	766	680	280	296	100	140		320	405	445	560	385	400	370	
	5.5KW-2	685	400	285	766	680	280	296	140	216		320	405	445	560	385	400	370	
4-72 4.5A	1.1KW-4	595	275	320	857	756	316	328	100	140		320	405	445	560	385	400	370	
	7.5KW-2	720	400	320	857	756	316	328	140	216		320	405	445	560	385	400	370	
4-72 5A	2.2KW-4	683	325	358	963	825	442	465	140	160		420	500	540	730	565	480	445	
	11KW/15KW-2	808	450	358	963	825	442	465	210	254		420	500	540	730	565	480	445	

风机配件 Fan accessories



风机壳 Fan housing



叶轮 Impeller



进风圈 Intake ring



电机板 Motor plate