




AS-Interface automation set for pneumatic valve actuators

Added Value package AS-i T5

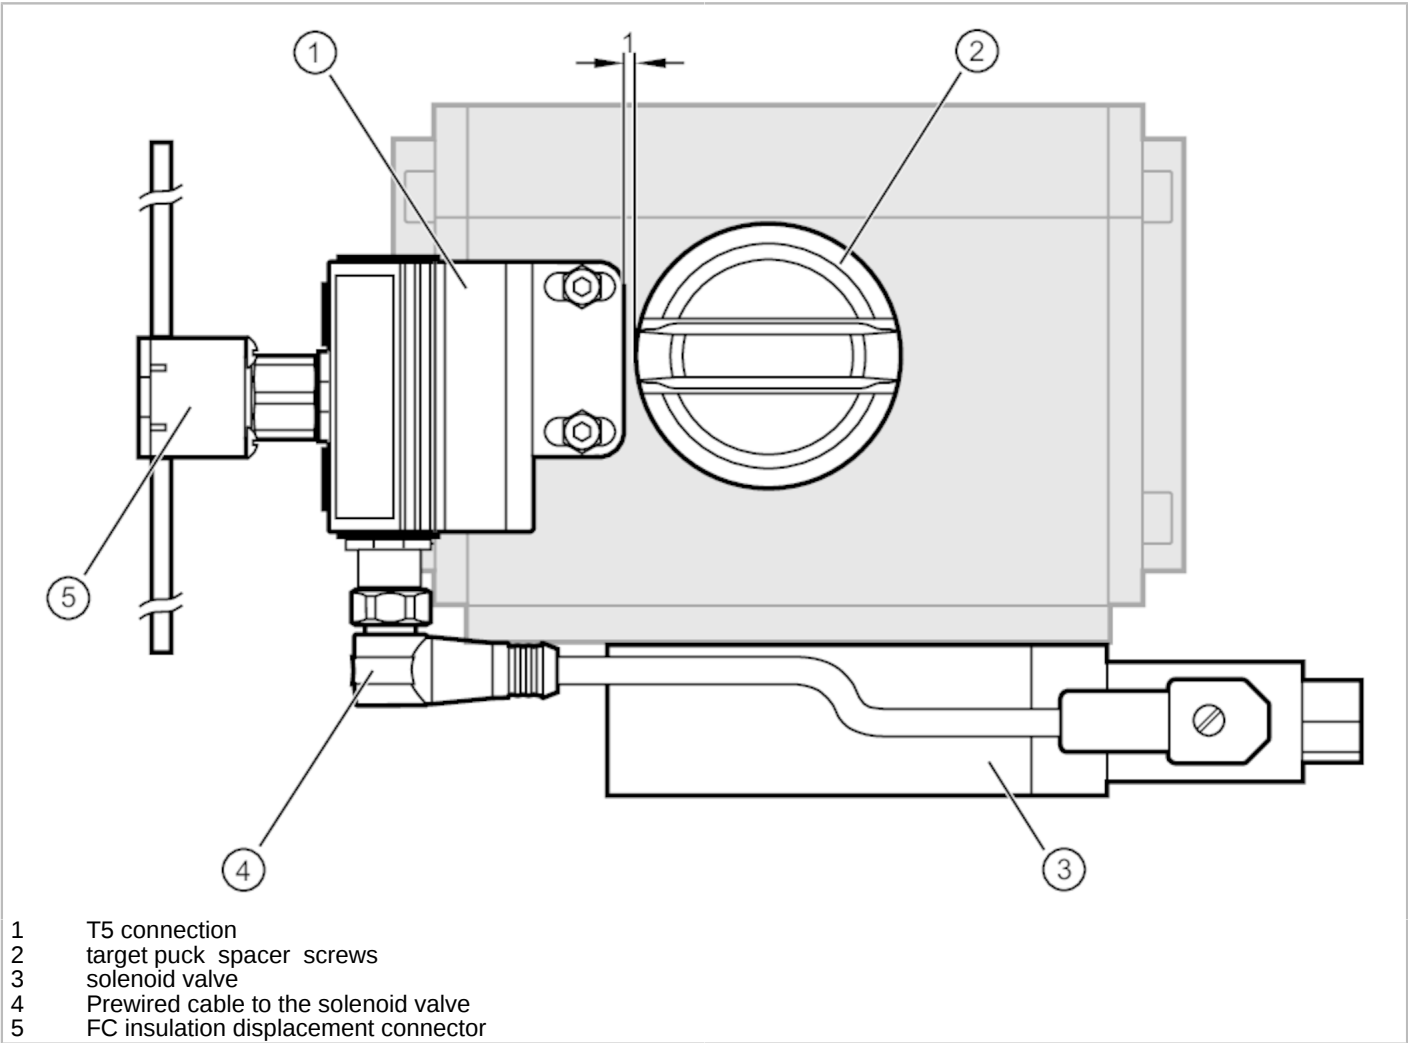


Product characteristics	
Output function	PNP
Application	
Application	direct open and close valve control
Components	dual sensor for actuator feedback: 1, AC2316
	Target pucks: 1, E17328
	Flat cable insulation displacement connector: 1, E75471
	solenoid valve: 1, Norgren Herion 2623079303602400
	silencer: 2, 0014600
Connection cable: 1, E10818	
Electrical data	
Max. current consumption from AS-i	[mA] 160
Operating voltage AUX DC	[V] 26.5...31.6; ("supply class 2" to cULus)
Inputs / outputs	
Number of inputs and outputs	Number of digital inputs: 2; Number of digital outputs: 1
Inputs	
Number of digital inputs	2



AS-Interface automation set for pneumatic valve actuators

Added Value package AS-i T5

Outputs	
Number of digital outputs	1
Output function	PNP
AS-i classification	
AS-i version	2.1
AS-i profile	S-7.A.E
AS-i I/O configuration [hex]	7
AS-i ID code [hex]	A.E
Mechanical data	
Weight [g]	1098.5
Mounting	non-flush mountable
Hole spacing [mm]	130
Shaft height of valve drive [mm]	30
Remarks	
Pack quantity	1 pcs.
Electrical connection	
Electrical connection - plug	
	
Connection	
Connection	
1	AS-i +
3	AS-i -
Electrical connection - socket	
	
Outputs	
3	external voltage -
4	switching output 1 +